



W-Band X3, Passive Frequency Multiplier

Description:

Model SFP-753124300-1028-S1 is a W-Band, X3 passive multiplier that utilizes GaAs Schottky, beam-lead diodes and a balanced circuit configuration to generate third order harmonics with good harmonic and fundamental suppression. This multiplier requires an input frequency range of 25 to 40 GHz at +20 dBm RF power to yield 75 to 120 GHz with +0 dBm. The multiplier is equipped with a WR-28 waveguide with a UG-599/U flange as its input port and a WR-10 waveguide with a UG-387/U-M flange as its output port. Other interface configurations are offered under different model numbers.



Features:

- Broadband Operation
- No External Bias Required
- Balanced Configuration for Low Harmonic Emissions

Applications:

- Source Modules
- Frequency Extenders
- Communication Systems
- Radar Systems

Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|---------------------------|---------|---------|---------|
| Input Frequency | 25 GHz | | 40 GHz |
| Output Frequency | 75 GHz | | 120 GHz |
| Input Power | | +20 dBm | +22 dBm |
| Output Power | | +0 dBm | |
| Harmonic Suppression | | 20 dB | |
| Specification Temperature | | +25 °C | |
| Operating Temperature | -40 °C | | +85 °C |

Mechanical Specifications:

| Item | Specification |
|---------------|--|
| Input Port | WR-28 Waveguide with UG-599/U Flange |
| Output Port | WR-10 Waveguide with UG-387/U-M Flange |
| Case Material | Aluminum |
| Finish | Gold Plated |
| Weight | 0.9 Oz |
| Size | 0.75" (L) x 1.60" (W) x 0.50" (H) |
| Outline | FP-WA3 |







W-Band X3, Passive Frequency Multiplier

Typical Output Power vs. Frequency

P_{in} : +19 dBm

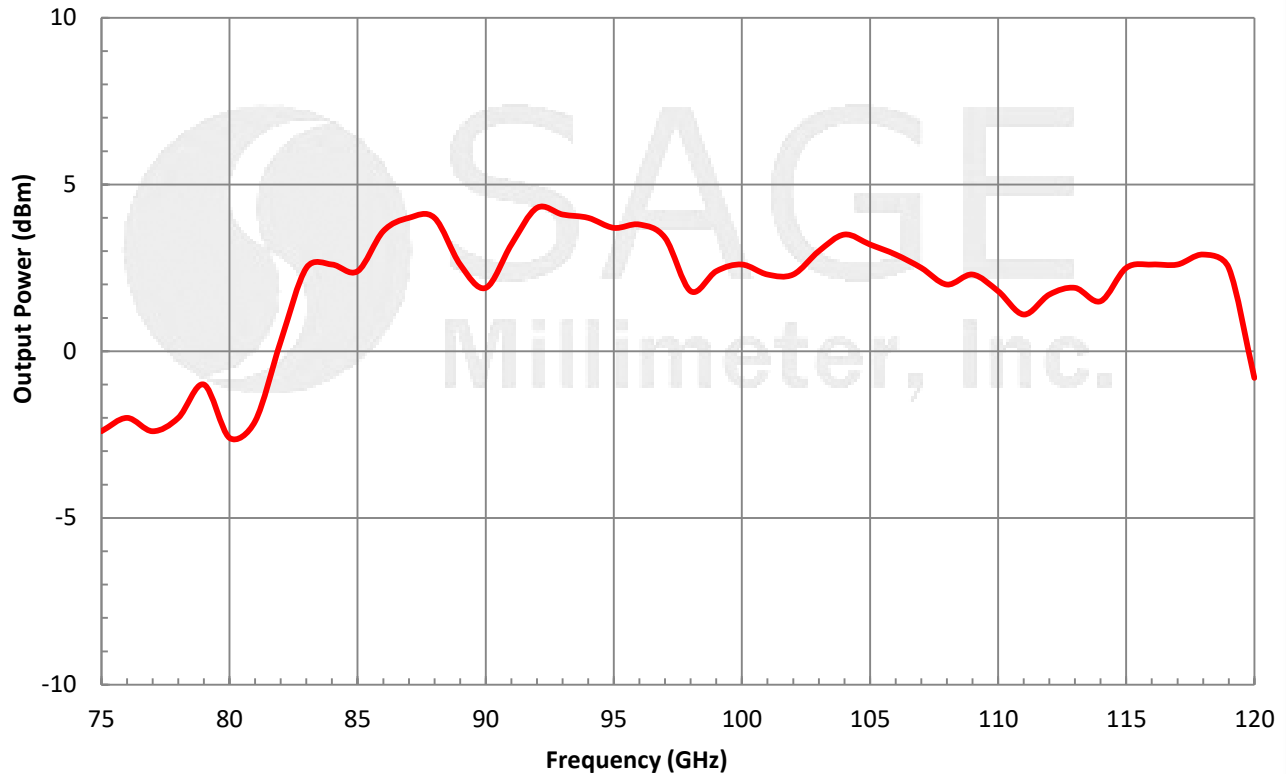

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

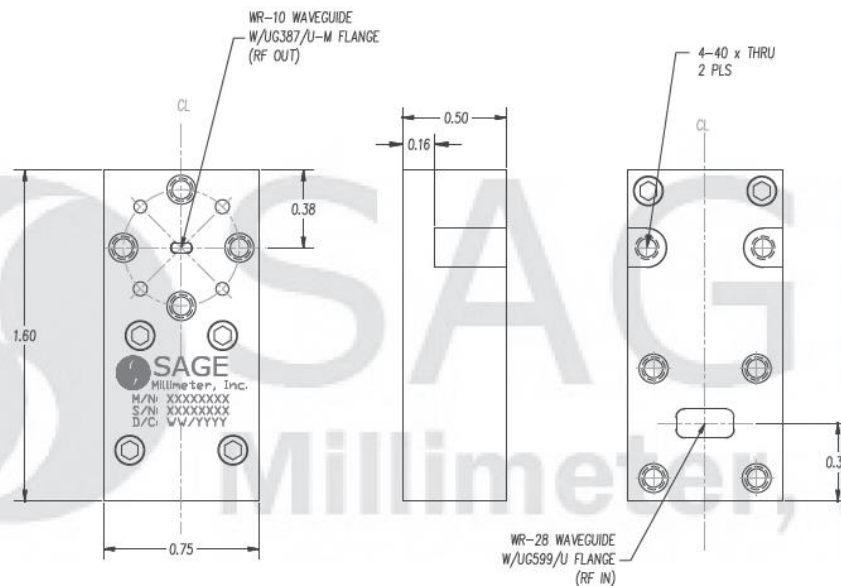



W-Band X3, Passive Frequency Multiplier

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings of the multiplier will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- The multiplier is a static sensitive device. Always follow ESD rules when working with the multiplier.

