

## SOP-40310113-KF-BB

### Phase Locked Oscillator, 40 GHz, +13 dBm, Combined Internal and External Reference

**SOP-40310113-KF-BB** is a 40 GHz phase locked oscillator with high performance DRVCO (Dielectric Resonator Voltage Controller Oscillator) technology to generate a clean and high-quality microwave signal. The oscillator has a built-in 100 MHz internal reference crystal oscillator. The oscillator is designed and fabricated to be phase locked to the internal reference oscillator automatically if the 10 MHz external reference is absent. The oscillator delivers a typical output power of +13 dBm and has a nominal harmonic of -25 dBc and spurious of -70 dBc respectively. The oscillator has a built-in voltage regulator to further improve the signal quality and prevent possible damage due to the over voltage operation. The oscillator is hermetically sealed to offer the maximum environmental performance.



#### Electrical Specifications:

Parameter		Minimum	Typical	Maximum
Frequency			40 GHz	
Output Power			+13 dBm	
Phase Noise	dBc/Hz @ 10 kHz		≤ -84	
	dBc/Hz @ 100 kHz		≤ -92	
	dBc/Hz @ 1 MHz		≤ -120	
Internal Reference Frequency			100 MHz	
External Reference Frequency			10 MHz	
External Reference Input Power		-3 dBm	0 dBm	+3 dBm
Harmonic			≤ -25 dBc	
Spurious			≤ -70 dBc	
Phase Locked Indicator			TTL "High"	
Phase Error Voltage (V <sub>r</sub> )			0 to +10 V <sub>DC</sub>	
DC Voltage			+12 V <sub>DC</sub>	+15 V <sub>DC</sub>
Bias Current			550 mA	
Specification Temperature			+25°C	
Operating Temperature		-40°C		+70°C

#### ECCN

EAR99

#### FEATURES

- High Output Power
- Low Phase Noise
- Low Harmonic Components

#### APPLICATIONS

- Radar Systems
- Communication Links
- Transmitters/Receivers

#### SUPPLEMENTAL DETAILS




## SOP-40310113-KF-BB

### Mechanical Specifications:

Item	Specification
RF Output	2.92 mm (K) Female Connector
REF Input	SMA Female Connector
REF Output	SMA Female Connector
DC Bias Port (Vcc)	Feedthru Pin
Phase Lock Indicator Port (LD)	Feedthru Pin
Phase Error Voltage (V <sub>r</sub> )	Feedthru Pin
Case Material	Aluminum
Finish	Nickel Plated and Bare Aluminum
Package	Hermetically Sealed
Weight	4.0 Oz
Size	2.25" (L) x 2.25" (W) x 1.41" (H)
Outline	OP-EC-SM1

**Mechanical Outline:** Unless otherwise specified, all dimensions are in inches [millimeters]

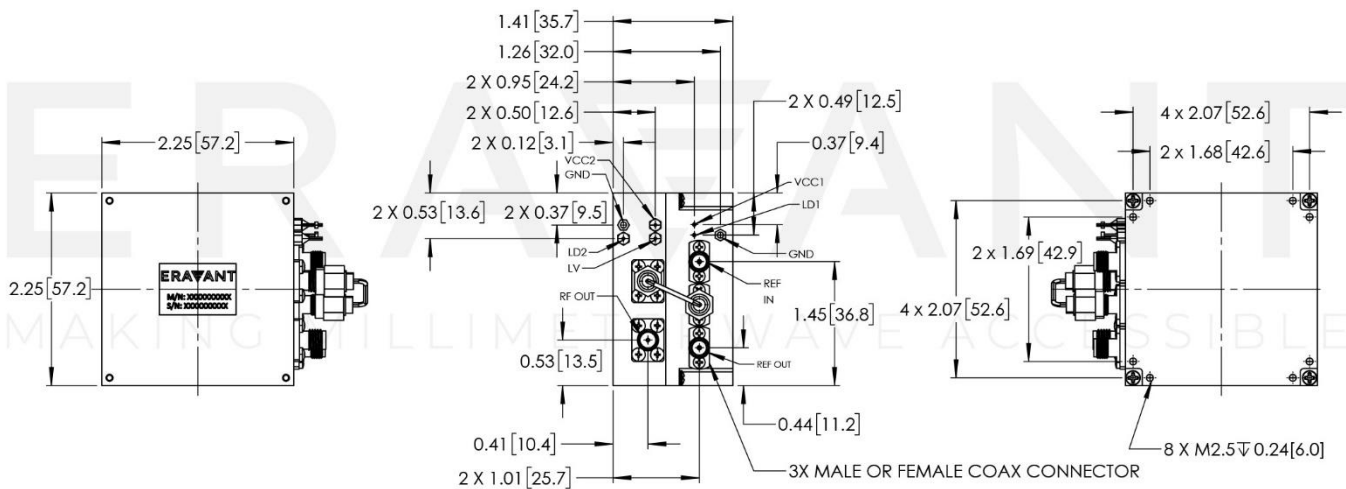

**NOTE:**

- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

**CAUTION:**

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device should never exceed **+60 °C**. Use proper heatsink or fan if necessary.
- Proper torque should be applied:  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm). Torque wrench model SCH-08008-S1 is highly recommended.

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE