



High Dynamic Range Electrical Attenuator, Positive Bias, Q Band

Description:

Model SKA-3534532535-2222-AP is a Q-Band, PIN diode based electrical attenuator. The attenuator exhibits 2.5 dB typical insertion loss and 30 dB nominal attenuation across the frequency range of 35 to 45 GHz. The control voltage of the standard model is 0 to +5 V_{DC} with a typical current draw of 5 mA. However, the attenuator can also be configured with a negative control voltage from 0 to -5 V_{DC}. The control speed of the attenuator can go up to 100 ns. The RF input and output ports are WR-22 waveguides with UG-383/U flanges, and a female SMA connector provides the control signal.



Features:

- Low Insertion Loss
- High Dynamic Range
- Fast Control Speed

Applications:

- Radar Systems
- Communication Systems
- Testing Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	35 GHz		45 GHz
Insertion Loss		2.5 dB	
Attenuation	3 dB	30 dB	
Power Handling		+20 dBm	+23 dBm
Control Voltage		0 to +5 V _{DC} / 5 mA	0 to +6 V _{DC} / 8 mA
Control Speed		100 ns	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
RF Ports	WR-22 Waveguide with UG-383/U Flange
Bias	SMA(F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.8 Oz
Insertion Length	1.5"
Outline	KA-AQ






High Dynamic Range Electrical Attenuator, Positive Bias, Q Band

Typical Attenuation vs. Frequency for Varying Control Voltage

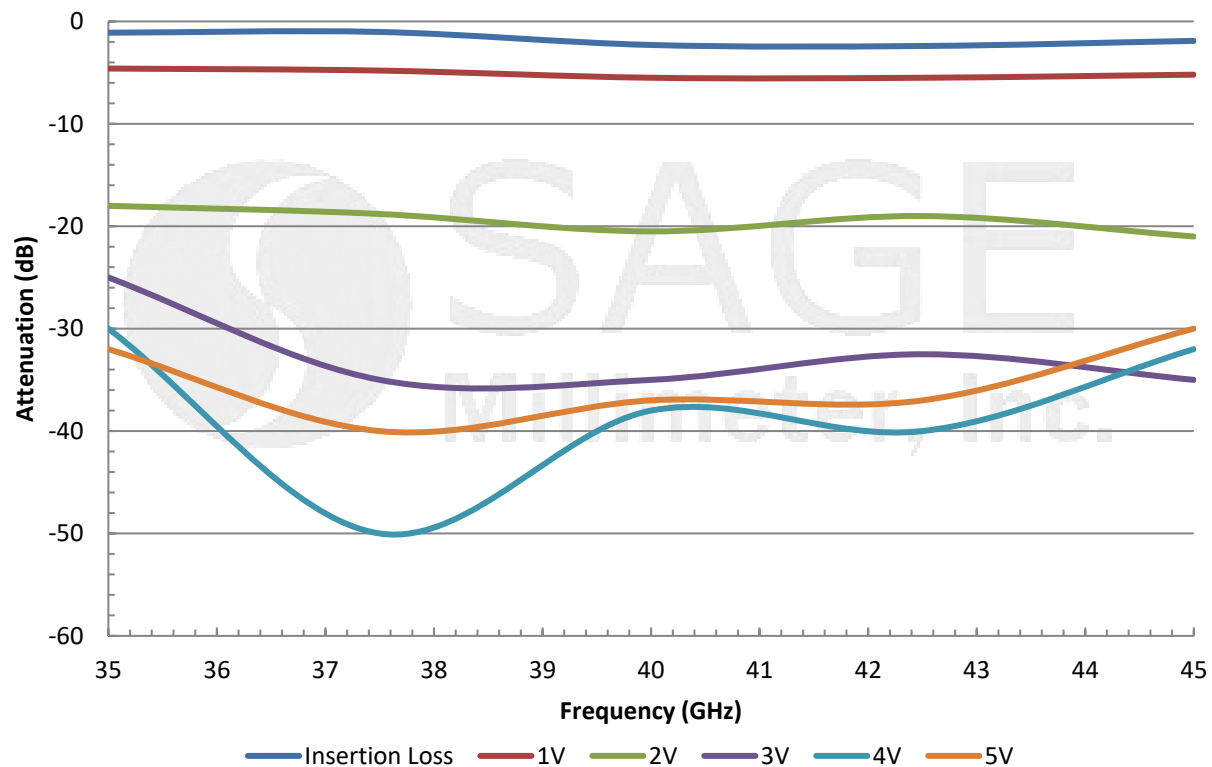

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

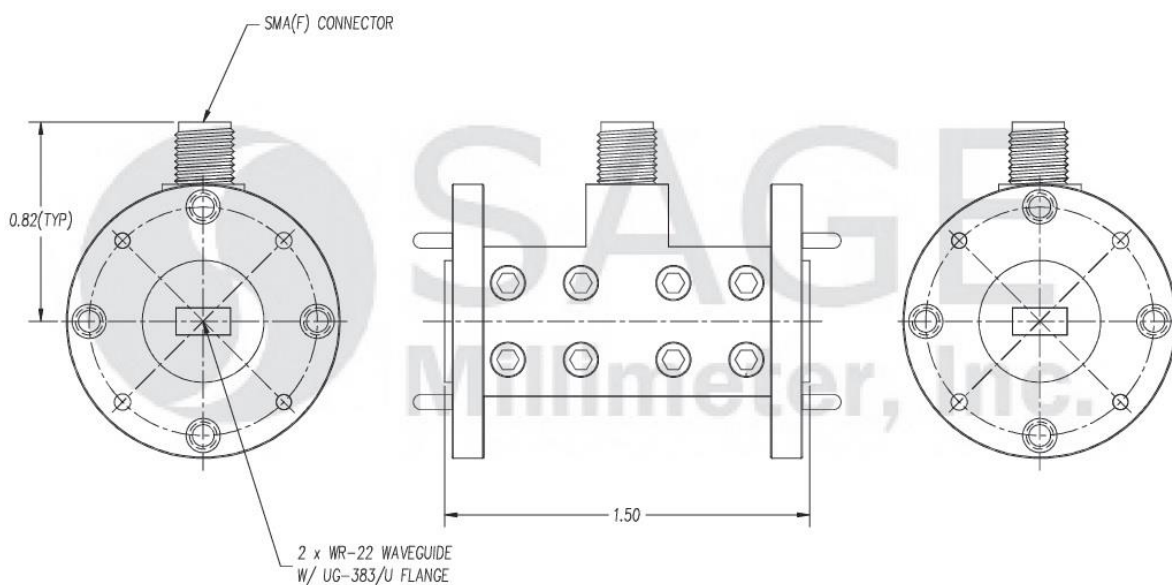



High Dynamic Range Electrical Attenuator, Positive Bias, Q Band

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The attenuator is a static sensitive device. Always follow ESD rules when working with the attenuator.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

