

Ka Band Waveguide Junction Circulator, 27 to 29 GHz

Description:

Model SNW-2732930420-28-CE is a Ka band waveguide junction circulator that covers the frequency range of 27 to 29 GHz. The waveguide junction circulator is designed and manufactured to provide a low insertion loss of 0.4 dB nominal, a typical isolation of 20 dB, and a much shorter insertion length for system integration. The input and output ports are WR-28 waveguides with UG-599/U flanges. The circulator implements a U-shaped magnet shielding steel cover to protect it from magnetic field interference.



Features:

- Low Insertion Loss
- Moderate Isolation
- Compact Configuration

Applications:

- Radar Systems
- Module Integration
- Port Isolation

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	27 GHz		29 GHz
Insertion Loss		0.4 dB	0.6 dB
Isolation	18 dB	20 dB	
Return Loss		18 dB	
Power Handling (Forward)			5 W (CW)
Power Handling (Reverse)			1 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


Mechanical Specifications:

Item	Specification
RF Ports	WR-28 Waveguide with UG-599/U Flange with 4-40 Tapped Holes
Case Material	Aluminum
Finish	Chem Film
Weight	0.8 Oz
Size	0.83" (W) x 0.95" (L) x 0.75" (H)
Outline	NW-CA-J1



Ka Band Waveguide Junction Circulator, 27 to 29 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

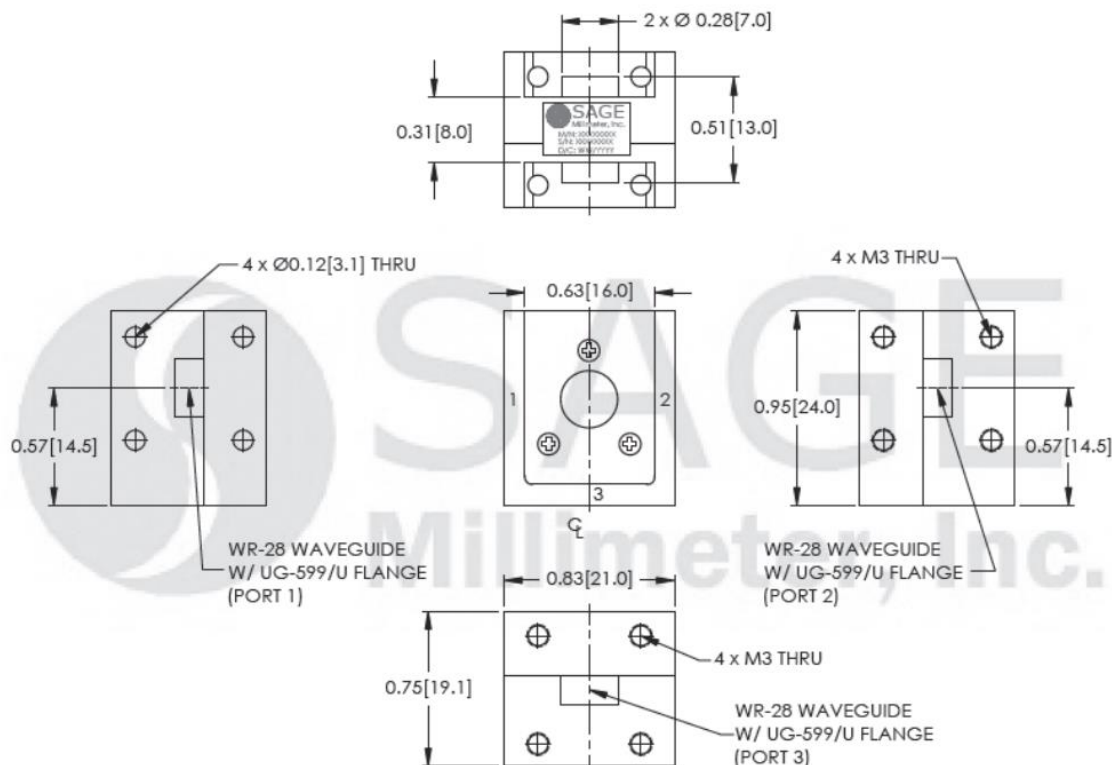

Note:

- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings of the device will damage the device.
- The device is magnetically sensitive. Keep a safe distance from magnetic fields.
- Any foreign objects in the waveguide will degrade performance and/or damage the device.