



Ka Band Waveguide Junction Circulator, 27 to 29 GHz

Description:

Model SNW-2732930421-28-C8 is a Ka band waveguide junction circulator that covers the frequency range of 27 to 29 GHz. The waveguide junction circulator is designed and manufactured to provide a low insertion loss of 0.35 dB, a typical isolation of 21 dB, and a much shorter insertion length for system integration. The input and output ports are WR-28 waveguides with UG-599/U compatible flanges. The circulator implements a U-shaped magnet shielding steel cover to protect it from magnetic field interference.



Features:

- Low Insertion Loss
- Moderate Isolation
- Compact Configuration

Applications:

- 5G Systems
- Module Integration
- Port Isolation

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	27 GHz		29 GHz
Insertion Loss		0.35 dB	
Isolation		21 dB	
Return Loss		20 dB	
Power Handling			15 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
RF Ports	WR-28 Waveguide with UG-599/U Flange
Case Material	Aluminum
Finish	Chem Film
Weight	0.8 Oz
Size	0.75" (W) x 1.00" (L) x 0.75" (H)
Outline	NW-CA-J2





Ka Band Waveguide Junction Circulator, 27 to 29 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

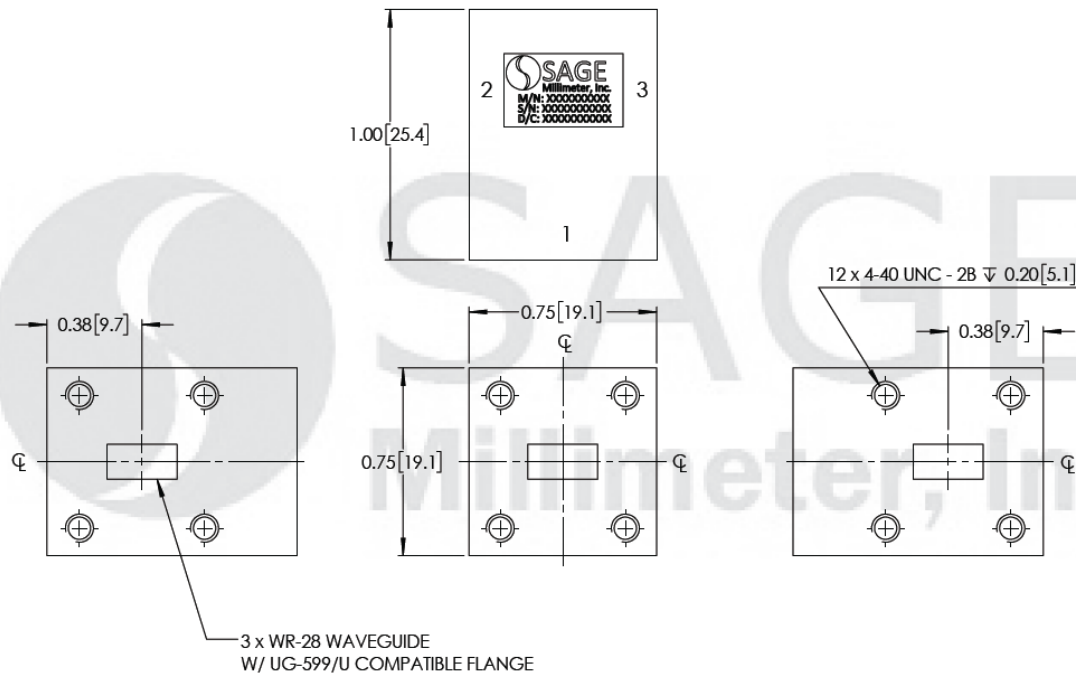

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings will damage the device.
- This device is magnetic sensitive. Keep the device at least 6" away from magnetic fields.
- Any foreign objects in the waveguide will degrade the performance and/or damage the device.

