



## W Band Waveguide Junction Circulator, 78 to 86 GHz

### Description:

**Model SNW-7838630816-10-CH** is a W band waveguide junction circulator that covers the frequency range of 78 to 86 GHz. The waveguide junction circulator is designed and manufactured to provide a low insertion loss of 0.8 dB nominal, a typical isolation of 16 dB, and a much shorter insertion length for system integration. The input and output ports are WR-10 waveguides with UG-387/U-M anti-cocking flanges.



### Features:

- Low Insertion Loss
- Moderate Isolation
- Compact Configuration

### Applications:

- Port Isolation
- Module Integration

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	78 GHz		86 GHz
Insertion Loss		0.8 dB	
Isolation		16 dB	
Return Loss		16 dB	
Forward Power Handling		2 W (CW)	3 W (CW)
Reverse Power Handling			1 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-10 °C		+55 °C

### Mechanical Specifications:


Item	Specification
RF Ports	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
Body Material	Aluminum
Body Finish	Silver Plated
Cover Finish	Black Anodized
Weight	0.8 Oz
Size	1.00" (L) X 1.00" (W) X 0.85" (H)
Outline	NW-CW-A






## W Band Waveguide Junction Circulator, 78 to 86 GHz

### Typical Performance vs. Frequency

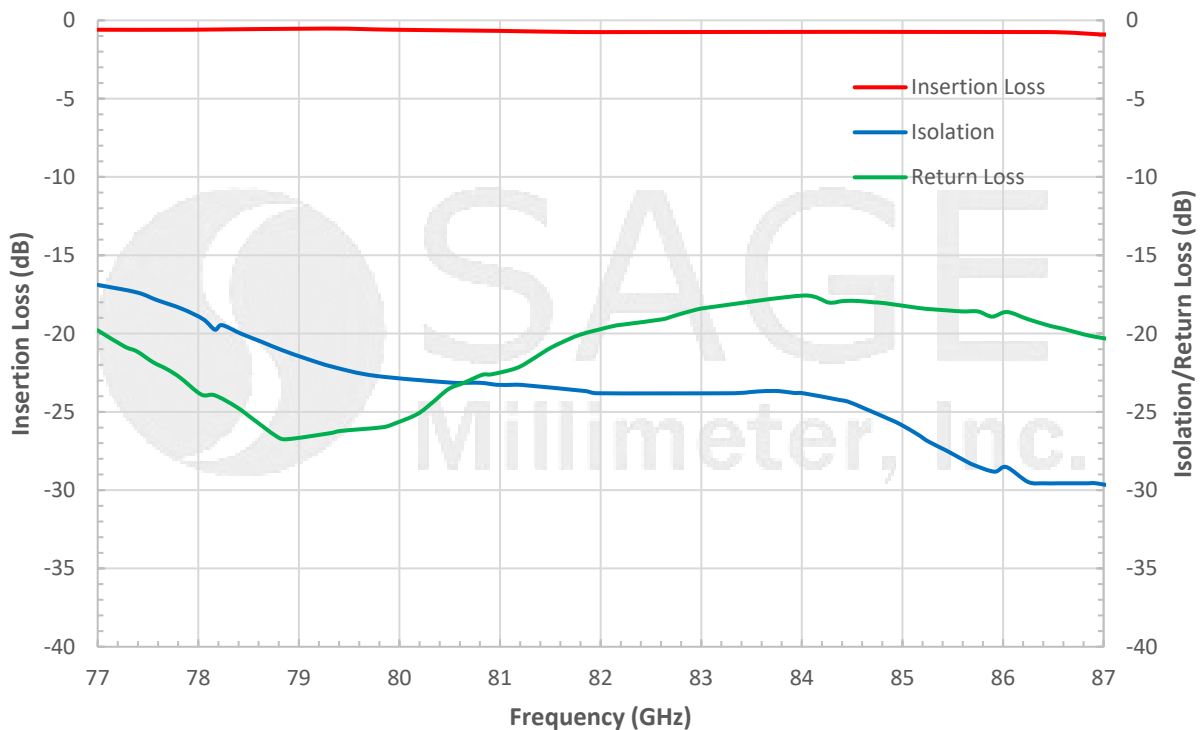

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

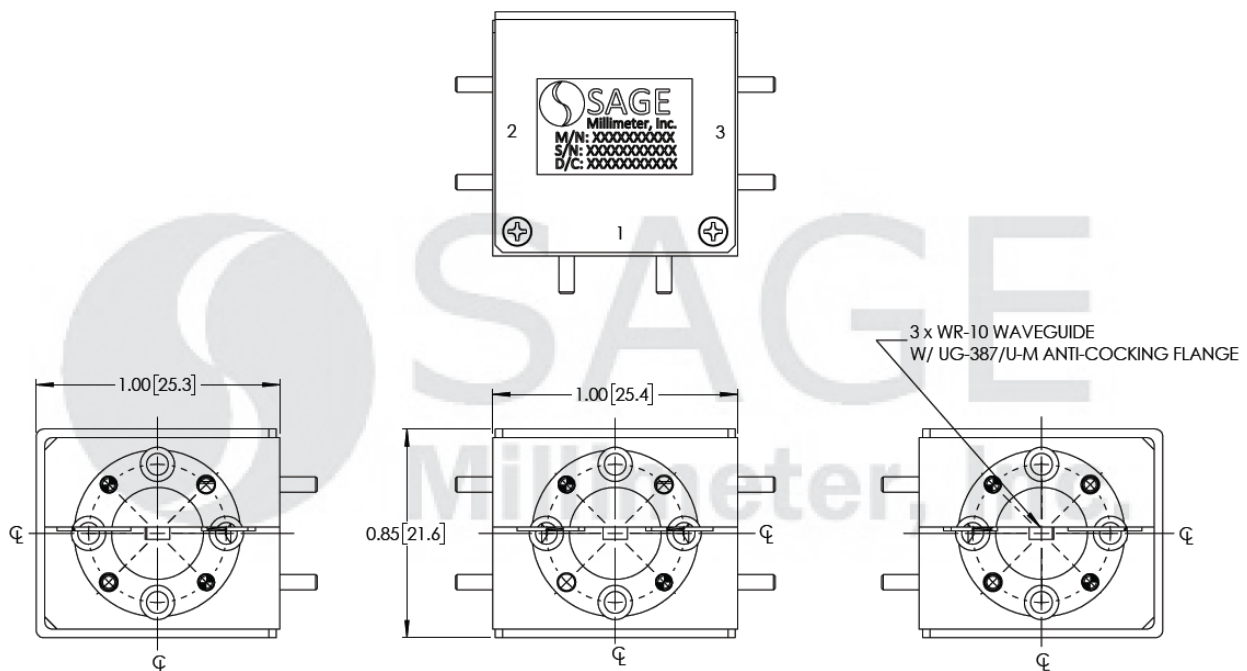

www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com



## W Band Waveguide Junction Circulator, 78 to 86 GHz

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

### Caution:

- Exceeding absolute maximum ratings will damage the device.
- This device is magnetic sensitive. Keep the device at least 6" away from magnetic fields.
- Any foreign objects in the waveguide will degrade the performance and/or damage the device.

