

## Dielectric Resonator Oscillator, 28 GHz, +16 dBm

## **Description:**

**Model SOD-28305116-KF-S4** is a mechanically tuned, dielectric resonator oscillator with a center frequency of 28 GHz and a mechanical tuning range of  $\pm 25$  MHz. The oscillator delivers a nominal output power of  $\pm 16$  dBm with a low phase noise and harmonic emissions. The oscillator takes a  $\pm 8$  V<sub>DC</sub>/350 mA DC bias. The RF output is equipped with a female 2.92 mm (K) connector.



### **Features:**

- Low AM/FM Noise and Harmonics
- Mechanically Tunable

# Applications:

- Test Sources
- Signal Generation
- Lab Test Setups

## **Electrical Specifications:**

Parameter	Minimum	Typical	Maximum
Center Frequency		28 GHz	
Power Output		+16 dBm	
Mechanical Tuning Range		±25 MHz	
Frequency Stability			±5 ppm/°C
Phase Noise @ 100 KHz Offset		-100 dBc/Hz	
Spurious			-75 dBc
Harmonics			-20 dBc
Bias Voltage		+8 V <sub>DC</sub>	
Bias Current		350 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

## **Mechanical Specifications:**

Item	Specification
RF Port	K (F)
DC Bias	Solder Pin
Case Material	Aluminum
Finish	Nickel Plated
Weight	6 Oz
Size	2.36" (L) x 0.98" (W) x 0.71" (H)
Outline	OD-FCA-NW1






www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com



Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

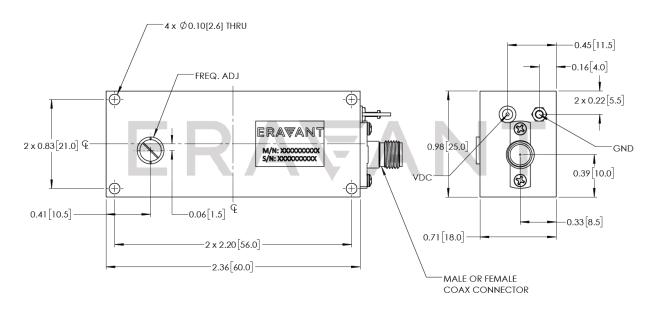

### Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

### Caution:

- Reversing polarity bias will destroy the device.
- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed <u>+50°C</u>. Use additional heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.



ESD