



24.125 GHz Ranging Sensor Head, Single Channel, Medium Range

Description:

Model SSD-24303-22M-S1 is a K Band, microstrip antenna-based ranging sensor head that is designed and manufactured for **medium range** measurements of a moving or stationary target's range and speed. The sensor head has a center frequency of 24.125 GHz and takes a nominal bias of +5.0 VDC/250 mA. The frequency modulation bandwidth of ± 75 MHz minimum is realized via a tuning voltage of 0 to +20 Volts. The sensor heads are configured with a microstrip antenna, T/R diplexer, a single channel receiver and a transmitter/receiver oscillator in an integrated package. Sensor heads with a dual receiver are offered under model number **SSD-24303-22M-D1** and can also detect the direction of a target in addition to the range and speed.



Features:

- 24.125 GHz FMCW Operation
- Low Flick Noise and High Sensitivity
- Low Harmonic Emission

Applications:

- Traffic Management Systems
- True Ranging Systems
- Military Surveillance Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Antenna 3 dB Beamwidth		4.6° (H) x 14.8° (V)	
Antenna Side Lobes			-20 dBc
Antenna Gain		22 dBi	
Antenna Polarization		Linear, Vertical	
RF Center Frequency		24.125 GHz	
FMCW Tuning Bandwidth	± 75 MHz	± 100 MHz	
FMCW Tuning Voltage		0 to +20 Volts	
Transmitting Power		+3 dBm	
IF Frequency Range	DC		100 MHz
IF Offset Voltage		-0.5 V _{DC}	
Frequency Stability		-0.3 MHz/°C	
Power Stability		-0.03 dB/°C	
DC Supply Voltage		+5.0 V _{DC} /250 mA	+5.5 V _{DC}
Varactor Bias	0		+20 V
Specification Temperature		+25°C	
Operating Temperature	-30°C		+60°C






24.125 GHz Ranging Sensor Head, Single Channel, Medium Range

Mechanical Specifications:

Item	Specification
Gunn Oscillator Bias Port	Solder Pad
Varactor Tuning Port	Solder Pad
Mixer IF Port	Solder Pad
Size	6.90" (W) X 2.30" (L) X 1.22" (H)
Material	Die Casted Zinc (Housing), Aluminum Plate (Antenna)
Finish	Chem Film
Weight	7.6 Oz
Outline	SD-MK-25

Typical Varactor Tuned Oscillator Performance


Gunn Bias: +5.0 V_{DC}/183 mA

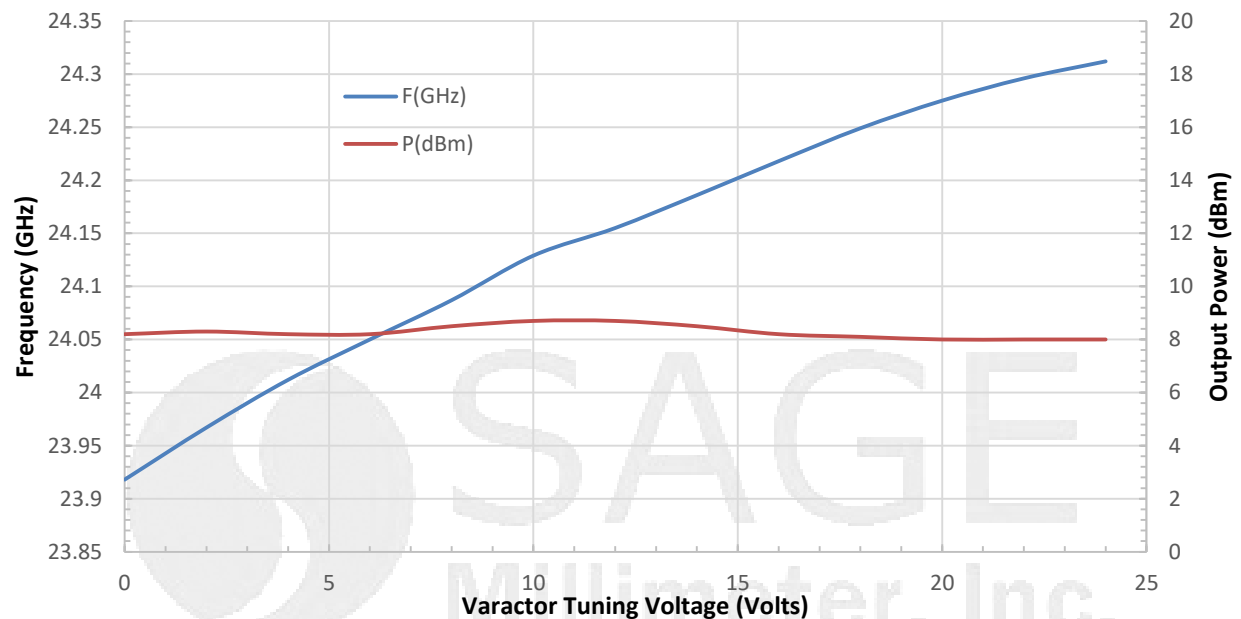



24.125 GHz Ranging Sensor Head, Single Channel, Medium Range

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches[mm])

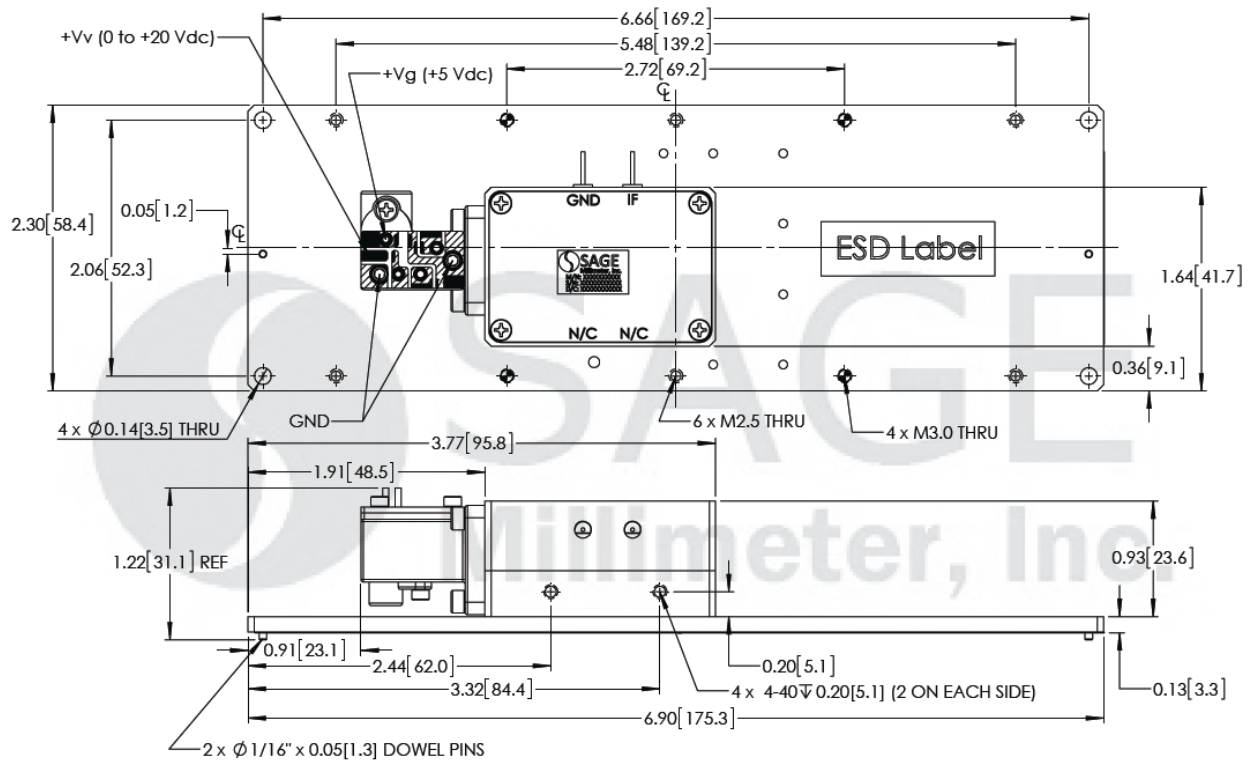

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- The device is static sensitive. Always follow ESD rules when working with the device.
- Wrong bias or reverse bias on the sensor will damage the device.
- Exceeding absolute maximum ratings shown will damage the device. Use additional heatsink or fan if necessary

