SOL-33310215-28-G1

1/2

Ka-Band Volume Production Oscillator

SOL-33310215-28-G1 is a volume-production ready, Ka Band Gunn oscillator that utilizes a high performance GaAs Gunn diode and high Q cavity to achieve excellent phase noise and power stability. The oscillator is designed for fixed frequency applications; however, the frequency can be adjusted by ± 1 GHz using the self-locking set screw provided.

Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|------------------------------|----------|---------------|--------------------|
| Frequency Range | | 33 GHz | |
| Power Output | +12 dBm | +15 dBm | |
| Mechanical Tuning Range | ±500 MHz | ±1,000 MHz | |
| Harmonic Emissions | | -20 dBc | |
| Phase Noise @ 100 KHz offset | | -95 dBc/Hz | |
| Frequency Stability | | | -0.3 MHz/°C |
| Power Output Stability | | | -0.03 dB/°C |
| Bias Voltage | | +5.5 V_{DC} | +6 V _{DC} |
| Bias Current | | 300 mA | |
| Specification Temperature | | +25°C | |
| Operating Temperature | -40°C | | +85°C |

Mechanical Specifications:

| Item | Specification | | |
|-----------------|--------------------------------------|--|--|
| RF Ports | WR-28 Waveguide with UG-599/U Flange | | |
| Cavity Material | Aluminum | | |
| Finish | Chem Film | | |
| Weight | 0.6 Oz | | |
| Outline | OL-A1 | | |

ECCN EAR99

FEATURES

- Low Cost and Production Ready
- Mechanical Tuning Ability
- Low AM/FM Noise and Harmonics
- High Frequency and Power Stability

APPLICATIONS

- Traffic Control Systems
- Communication Systems
- Radar System

SUPPLEMENTAL DETAILS


ER/ NEXT GENERATION MILES (NO PONENT) N 10011


ERA\ANT

SOL-33310215-28-G1

ERAWANT

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters])

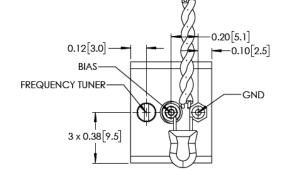

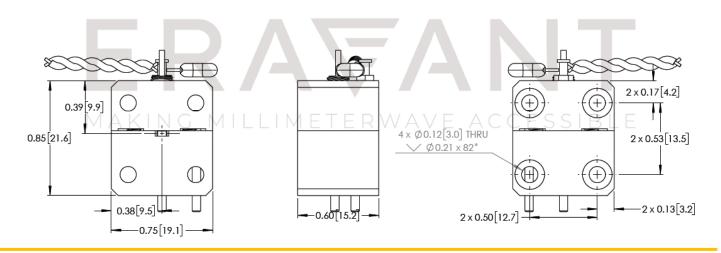

NOTE:

• Eravant reserves the right to change the information presented without notice.

CAUTION:

- Reversing polarity bias will destroy the device
- Exceeding absolute maximum rating shown will damage the device
- The device is static sensitive. Always follow ESD rules when working with the device
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- The case temperature of the device shall never exceed +85 °C. Use an additional heatsink or fan if necessary.

MAKING MILLIMETERWAVE ACCESSIBLE