# SOL-35315-28-G1-WP

### Ka-Band Volume Production Oscillator, 35 GHz

### **Description:**

**Model SOL-35315-28-G1-WP** is a volume-production ready, Ka Band Gunn oscillator that utilizes a high performance GaAs Gunn diode and high Q cavity to achieve excellent phase noise and power stability. The oscillator is designed for fixed frequency applications, however, the frequency can be adjusted by ±1.0 GHz using the self-locking set screw provided.

### **Features:**

- Low Cost and Production Ready
- Mechanical Tuning Ability
- Low AM/FM Noise and Harmonics
- High Frequency and Power Stability

### **Electrical Specifications:**

## Applications:

- Traffic Control Systems
- Communication Systems
- Radar Systems

Parameter	Minimum	Typical	Maximum
Center Frequency		35 GHz	
Power Output	+13 dBm	+15 dBm	
Mechanical Tuning Range	±500 MHz	±1,000 MHz	
Harmonic Emissions		-20 dBc	
Phase Noise @ 100 KHz offset		-95 dBc/Hz	
Frequency Stability			-0.3 MHz/°C
Power Output Stability			-0.03 dB/°C
Bias Voltage		+5.5 V <sub>DC</sub>	+6 V <sub>DC</sub>
Bias Current		350 mA	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

### **Mechanical Specifications:**

ltem	Specification	
RF Port	WR-28 Waveguide with UG-599/U Flange	
Cavity Material	Aluminum	
Finish	Chem Film	
Weight	0.6 Oz	
Outline	OL-A1	




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com





## Ka-Band Volume Production Oscillator, 35 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

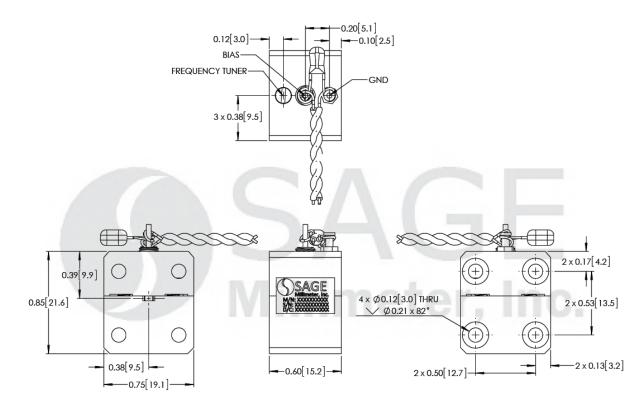

### Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- The center frequency can be set at any frequency point in the range of 32 to 37 GHz.

#### **Caution:**

- Reversing polarity bias will destroy the device.
- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- The case temperature of the device shall never exceed <u>+85°C</u>. Use an additional heatsink or fan if necessary.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

