


D-Band Mechanically Tuned Gunn Oscillator, ± 0.5 GHz Tuning Bandwidth

Description:

Model SOM-16401313-06-M1 is a D-Band, mechanically tuned Gunn oscillator that utilizes a high-performance InP Gunn diode and proprietary cavity design with a ferrite isolator and a passive multiplier to deliver +13 dBm typical power. The oscillator features a frequency tuning range of 159.5 to 161.5 GHz and delivers low AM/FM noise and harmonic emissions. Compared to its counterparts, such as multiplier-based sources, the Gunn oscillator is a lower cost and cleaner source. The Gunn oscillator's frequency can also be tuned by varying the bias voltage, which is useful for phase-locking and electrical-tuning applications. The Gunn oscillator is equipped with a micrometer for quick frequency tuning and test bench applications. Models with a self-locking set screw for system integration are available under a different model number. The performance of the oscillator can be further enhanced by adding an optional isolator, Gunn oscillator modulator/regulator and temperature heater.

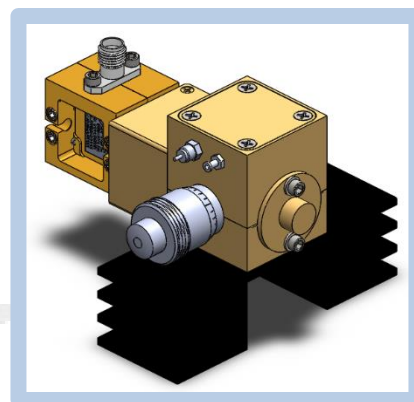

Features:

- Low AM/FM Noise and Harmonics
- Bias Tunable
- High Power

Applications:

- Test Sources
- Signal Generation
- Lab Test Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency		160.0 GHz	
Power Output		+13 dBm	
Mechanical Tuning Range		± 0.5 GHz	
Bias Tuning Range (+9.5 to +10.5 V _{DC})		± 200 MHz	
Gunn Bias Voltage/Current		+10 V _{DC} /250 mA	+10.5 V _{DC} /350 mA
Multiplier Bias Voltage		-6 to -15 V _{DC}	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C


Mechanical Specifications:

Item	Specification
RF Port	WR-06 Waveguide with UG-387/U-M Anti-Cocking Flange
DC Bias	SMA(F)
Mechanical Tuning	Micrometer
Body Material	Aluminum
Finish	Gold Plated
Weight	TBD
Outline	OM-MD-A -F



D-Band Mechanically Tuned Gunn Oscillator, ± 0.5 GHz Tuning Bandwidth

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

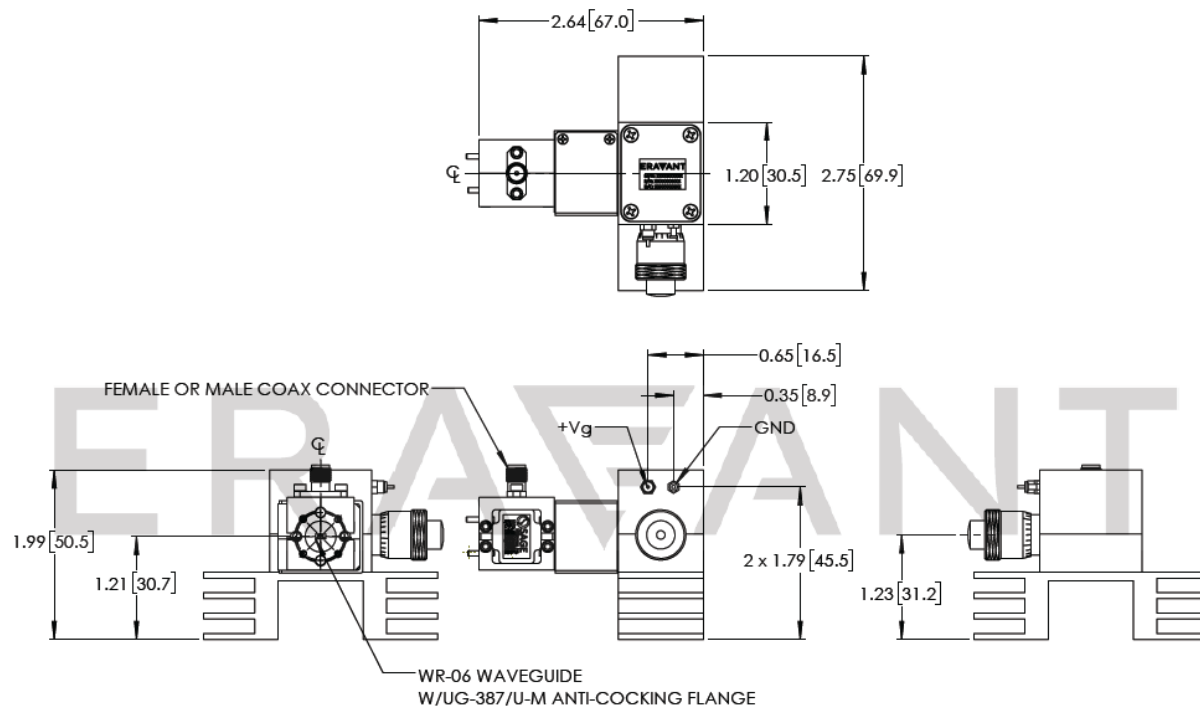

Note:

- The SAGE Millimeter Gunn oscillator regulator **SOR-R3** is highly recommended for over voltage and reverse bias protection. The outline of the model SOR-R3 is shown in the appendix
- The optional AM/FM Modulator **SOR-M5** can be ordered separately to further enhance the functionality of the Gunn oscillator. The outline of the modulator is also shown in the appendix.
- The bias tuning feature can be used for electrical tuning and phase lock loop applications.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.


Caution:

- Reversing polarity will destroy the device.
- Bias voltage should never exceed **+10.5 Volts**.
- The case temperature of the device should never exceed **+50 °C**. Use an additional heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will destroy the device.

D-Band Mechanically Tuned Gunn Oscillator, ± 0.5 GHz Tuning Bandwidth

Appendix:

The Outline of the Gunn Oscillator Regulator Model SOR-R3.

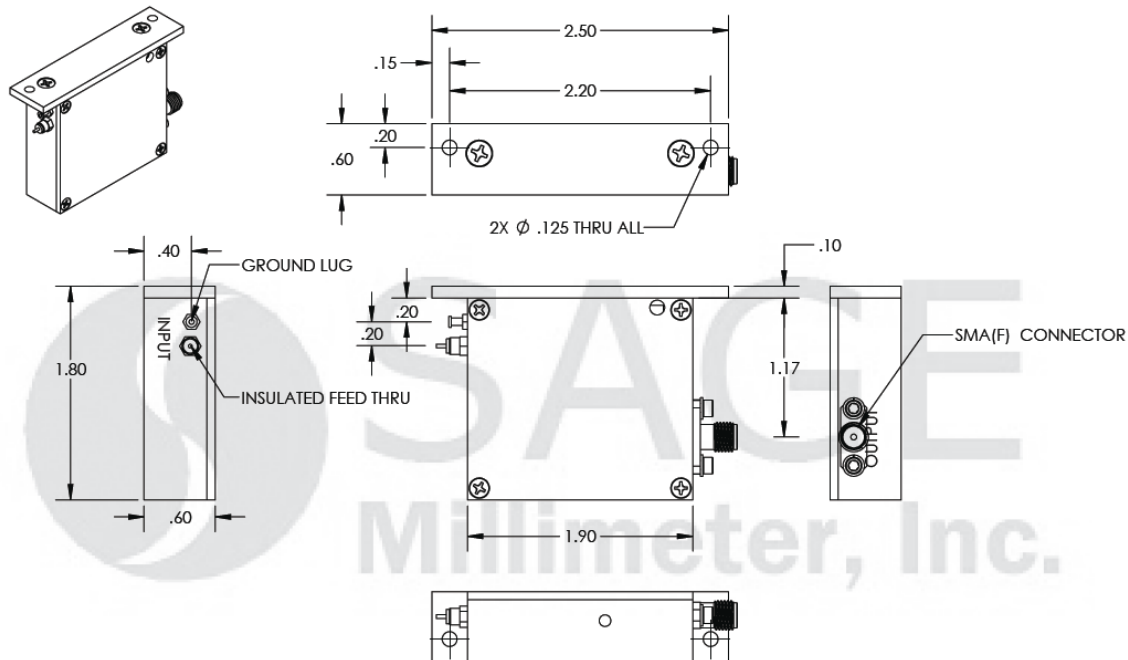

The Outline of the Gunn Oscillator Regulator Model SOR-M5.

