




34.850 GHz High Performance Doppler Sensor Head, Single Channel

Description:

Model SSS-35307-20M-S1 is a Ka Band, microstrip antenna-based Doppler sensor head that is designed and manufactured for **medium range** measurements of a moving target's speed. The sensor head has a center frequency of 34.85 GHz and takes a nominal bias of +5.0 VDC/250 mA. The sensor heads are configured with a microstrip antenna, T/R diplexer, a single channel receiver and a transmitter/receiver oscillator in an integrated die-cast housing. Sensor heads with a dual receiver are offered under model number **SSS-35307-20M-D1** and can detect both the speed and direction of a moving target.

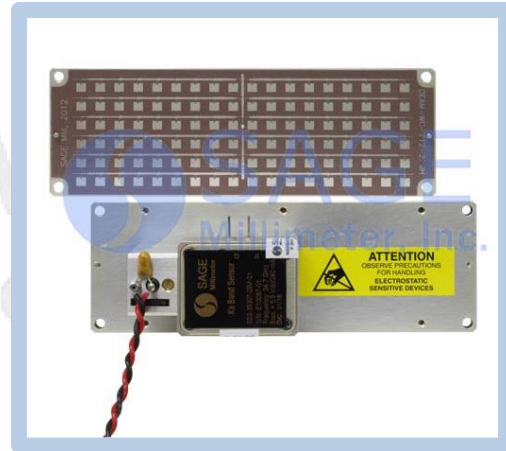

Features:

- 34.850 GHz Operation
- Low Flicker Noise and High Sensitivity
- Low Harmonic Emission

Applications:

- Traffic Management Systems
- Law Enforcement
- Military Surveillance Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Antenna 3 dB Beamwidth		4.6° (H) x 14.8° (V)	
Antenna Side Lobes		-20 dBc	
Antenna Gain		20 dBi	
Antenna Polarization		Linear	
RF Frequency Range	34.70 GHz	34.850 GHz	35.00 GHz
Transmitting Power		+7 dBm	
IF Frequency Range	DC		100 MHz
IF Offset Voltage		±0.1 V _{DC}	
Frequency Stability		-0.8 MHz/°C	
Power Stability		-0.03 dB/°C	
DC Supply Voltage		+5 VDC/250 mA	+5.5 VDC
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C






34.850 GHz High Performance Doppler Sensor Head, Single Channel

Mechanical Specifications:

Item	Specification
Gunn Oscillator Bias Port	Red Wire
Mixer IF Port	Solder Pin
IF Ground	Solder Pin
Common Ground	Solder Pad
Size	5.00" (W) X 1.70" (L) X 1.21" (H)
Material	Aluminum
Finish	Chem Film
Weight	4.5 Oz
Outline	SS-MA-25

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches[mm])

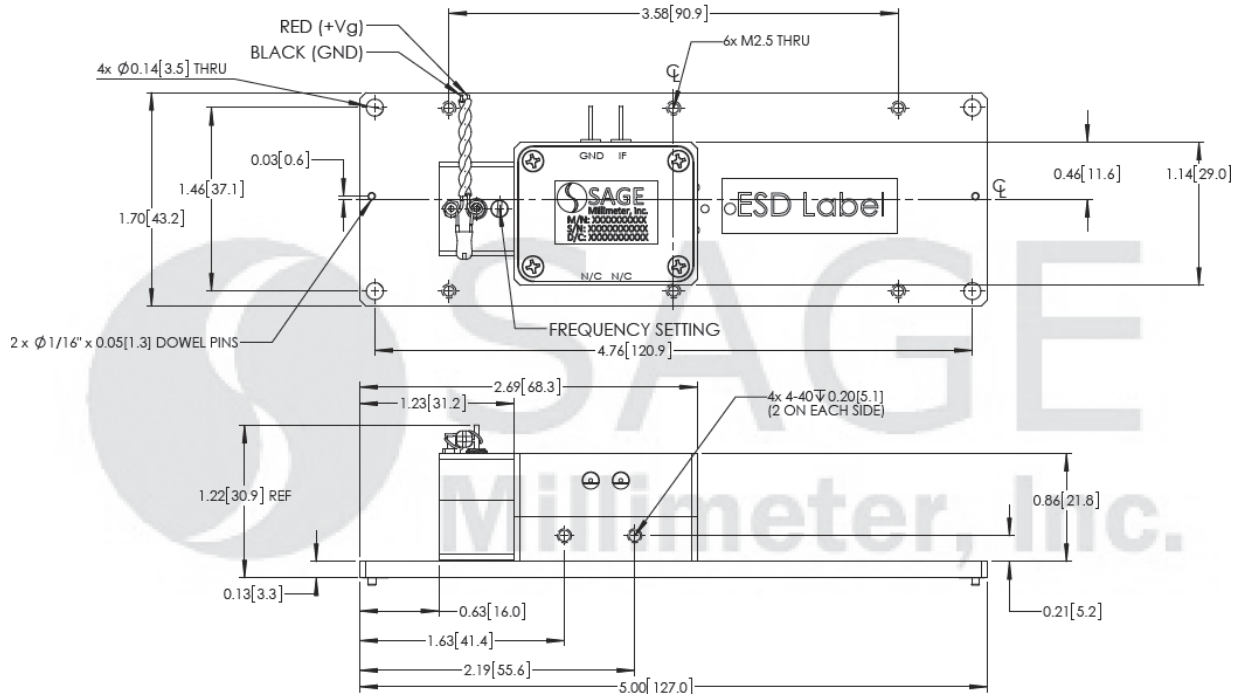

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- The device is static sensitive. Always follow ESD rules when working with the device.
- Wrong bias or reverse bias on the sensor will damage the device.
- Exceeding absolute maximum ratings shown will damage the device. Use additional heatsink or fan if necessary.

