

W-Band Transmitter, 92 to 96 GHz, 20 dB Gain, +20 dBm P_{1dB}, Image Rejection

Description:

Model SST-9430432030-10-M1-I is a W-Band image rejected transmitter. The transmitter has a typical conversion gain of 20 dB with a typical IF input power of -20 dBm in the frequency range of 4 to 8 GHz and a RF output frequency range of 92 to 96 GHz. The transmitter has a build in x8 multiplier, which requires the typical input LO power and frequency of 5 dBm and 11.0 GHz, respectively. With the build-in IF hybrid, the receiver offers 20 dB image rejection level typically. The LO and IF port are equipped with female SMA connectors and the RF port is a WR-10 waveguide with a UG-387/U-M flange.



Features:

- Compact Size
- High Transmitting Power
- Fully Integrated Module

Applications:

- Radar Systems
- Communication Systems

Electrical Specifications:



Parameter	Minimum	Typical	Maximum
RF Output Frequency	92 GHz		96 GHz
IF Input Frequency	4 GHz		8 GHz
IF Input Power	0 dBm		+10 dBm
Image Rejection*		20 dB	
IF to RF Conversion Gain		20 dB	
RF Output P _{1dB} /P _{sat}		+20/+24 dBm	
LO Frequency		11.00 GHz	
LO Input Power	0 dBm	+5 dBm	+10 dBm
LO Leakage		+15 dBm	
DC Voltage Supply	+6 V _{DC}	+8 V _{DC}	+16 V _{DC}
Current Supply		750 mA	
Specification Temperature		+ 25 °C	
Operating Temperature	0 °C		+ 50 °C

*Configured to reject lower sideband

Mechanical Specifications:


Item	Specification
RF Port	WR-10 Waveguide with UG-387/U-M Flange
IF Port and LO Port	SMA(F) and SMA (F)
Bias Port	Solder Pin
Case Material/Plating	Aluminum/Gold Plated
Weight	2.0 Oz
Size	1.10" (W) X 1.80" (L) X 0.50" (H)
Outline	ST-SW-S

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

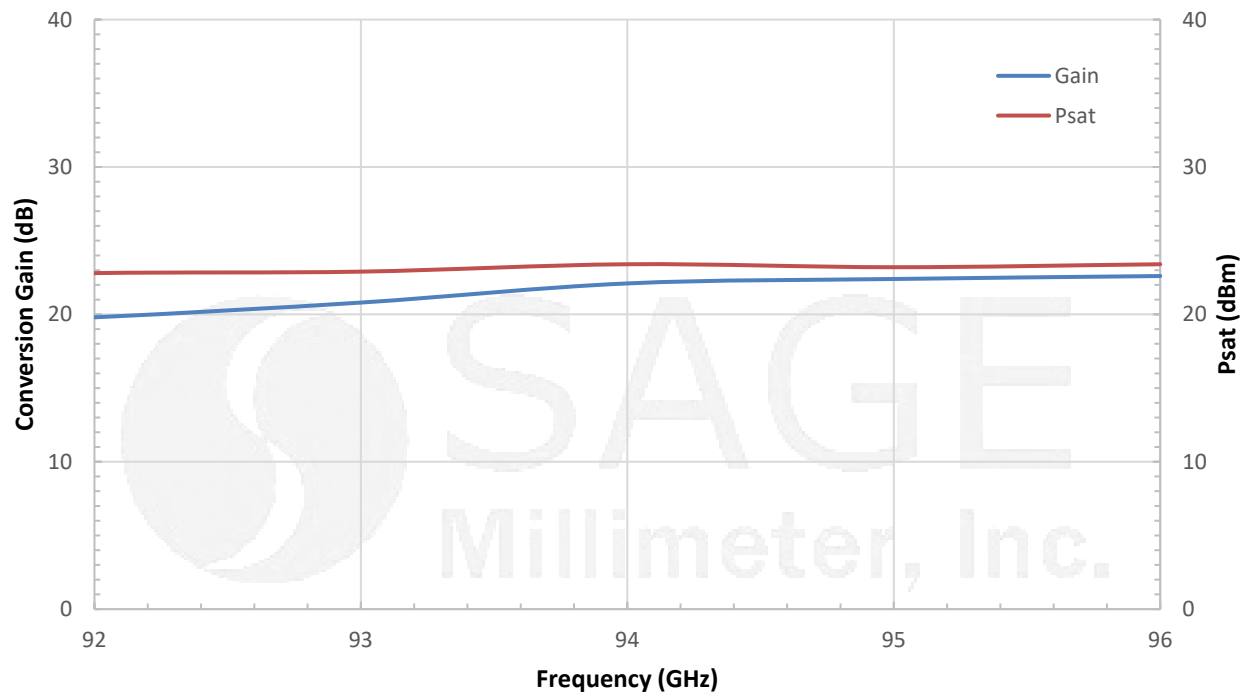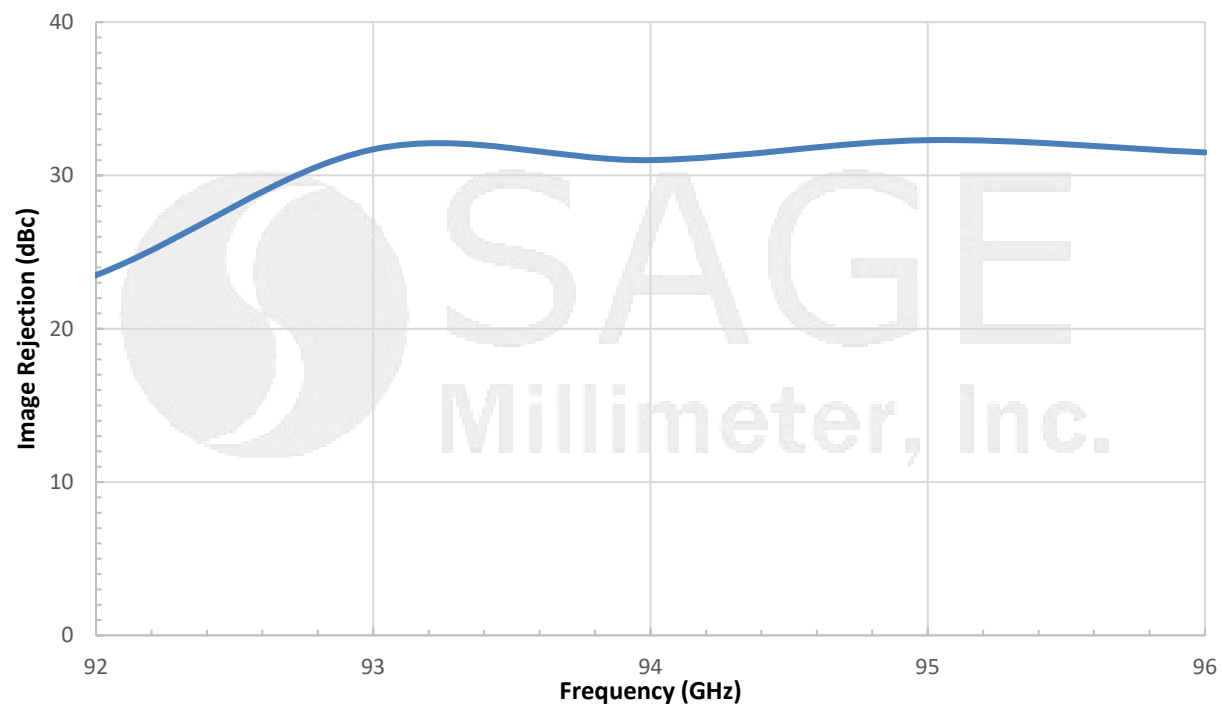
W-Band Transmitter, 92 to 96 GHz, 20 dB Gain, +20 dBm P_{1dB} , Image Rejection**Typical Conversion Gain and Psat vs. Frequency**Bias: +8 V_{DC}/710 mA, IF Input: -20 dBm**Typical Image Rejection vs. Frequency**Bias: +8 V_{DC}/710 mA, RF Input: -20 dBm

W-Band Transmitter, 92 to 96 GHz, 20 dB Gain, +20 dBm P_{1dB}, Image Rejection

Block Diagram:

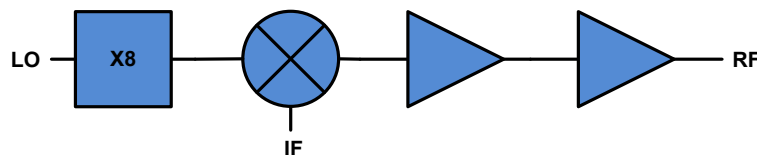

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

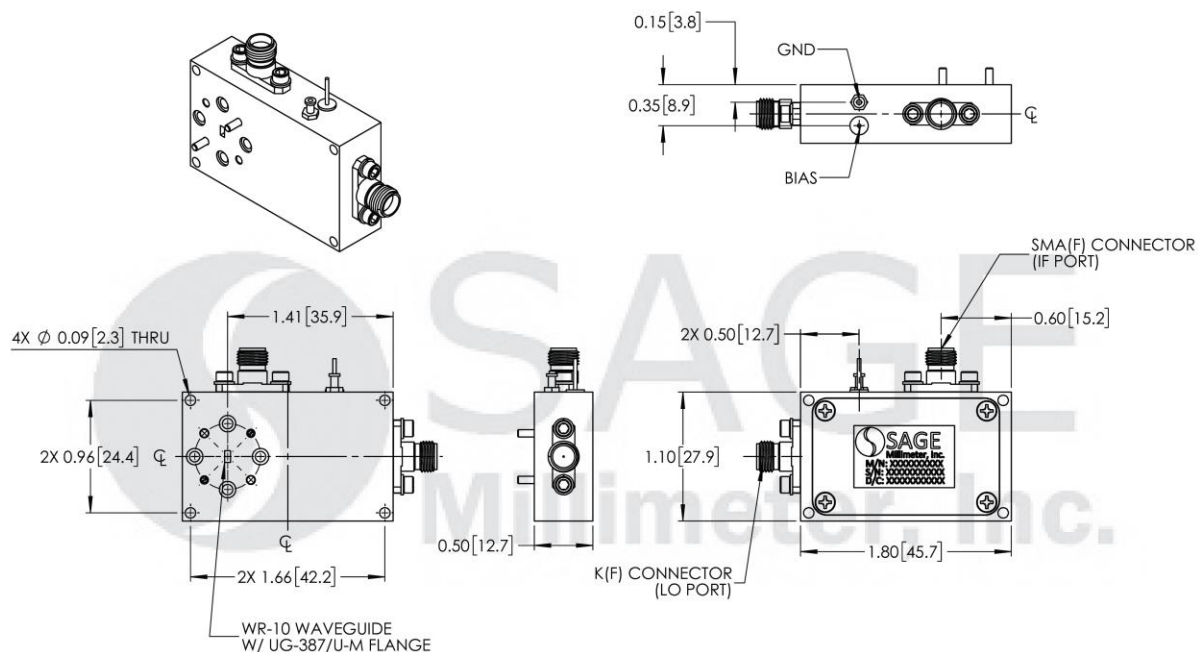

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- **The IF port is DC coupled and static sensitive. Always follow ESD rules when working with the device.**
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.