



## 35 GHz Ranging Sensor Head, Dual Channel, Medium Range

### Description:

**Model SSD-35307-20M-D1** is Ka Band, microstrip antenna-based ranging sensor head that is designed and manufactured for **medium range** measurements of a moving or stationary target's range, speed and direction. The sensor head has a center frequency of 35 GHz and takes a nominal bias of +5.5 VDC/250 mA. The frequency modulation bandwidth of  $\pm 75$  MHz minimum is realized via a tuning voltage of 0 to +20 Volts. The sensor heads are configured with a microstrip antenna, T/R diplexer, a dual channel (I/Q) receiver and a transmitter/receiver oscillator in an integrated package. Sensor heads with a single receiver are offered under model number **SSD-35307-20M-S1** and can only detect the range and speed of a target.



### Features:

- 35 GHz FMCW Operation
- Low Flick Noise and High Sensitivity
- Low Harmonic Emission

### Applications:

- Traffic Management Systems
- True Ranging Systems
- Military Surveillance Systems

### Electrical Specifications:


Parameter	Minimum	Typical	Maximum
Antenna 3 dB Beamwidth		4.6°(H) x 15°(V)	
Antenna Side Lobes		-20 dB	
Antenna Gain		20 dBi	
Antenna Polarization		Linear, Vertical	
RF Center Frequency		35 GHz	
FMCW Tuning Bandwidth	$\pm 75$ MHz	$\pm 100$ MHz	
FMCW Tuning Voltage		0 to +20 Volts	
Transmitting Power		+7 dBm	
Receiver I/Q Phase $\Delta$	80°		100°
Receiver I/Q Amplitude $\Delta$	0 dB		2 dB
IF Frequency Range	DC		100 MHz
IF Offset Voltage		$\pm 0.25 V_{DC}$	
Frequency Stability		-0.3 MHz/°C	
Power Stability		-0.03 dB/°C	
DC Supply Voltage		+5.5 $V_{DC}$ /250 mA	+6.0 $V_{DC}$
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C






## 35 GHz Ranging Sensor Head, Dual Channel, Medium Range

### Measured Co-pol E and H Plane Patterns

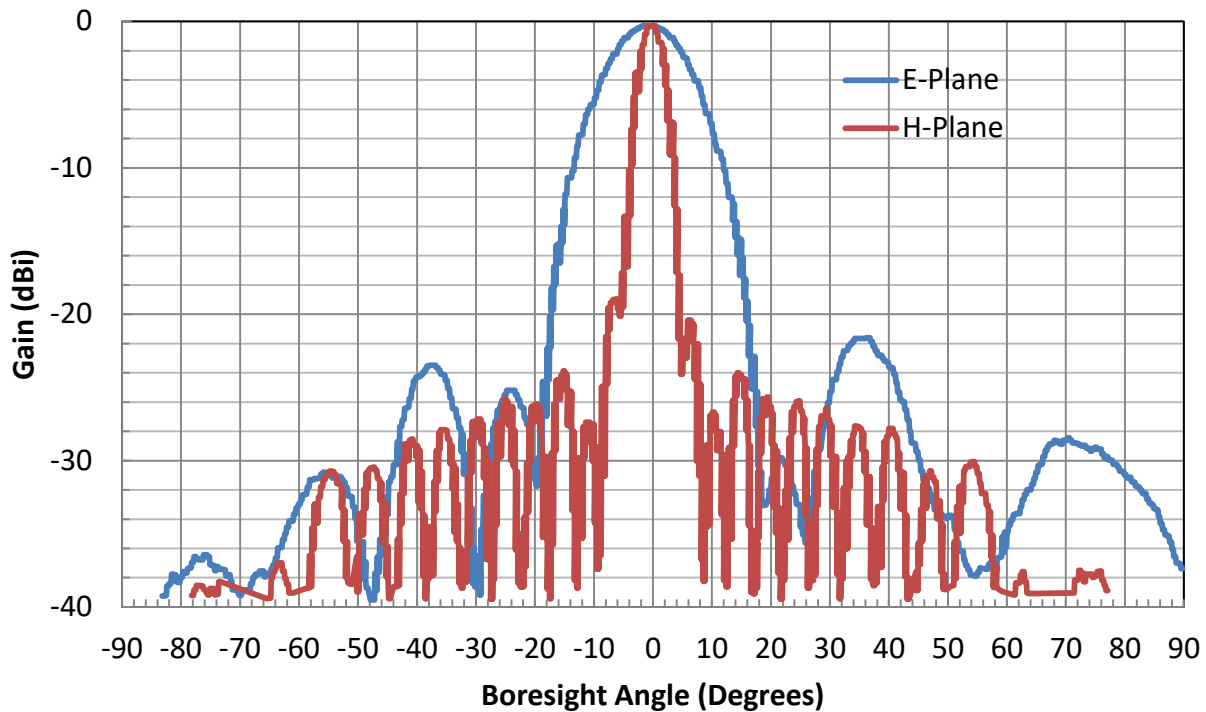

### Measured Cross-pol E and H Plane Patterns

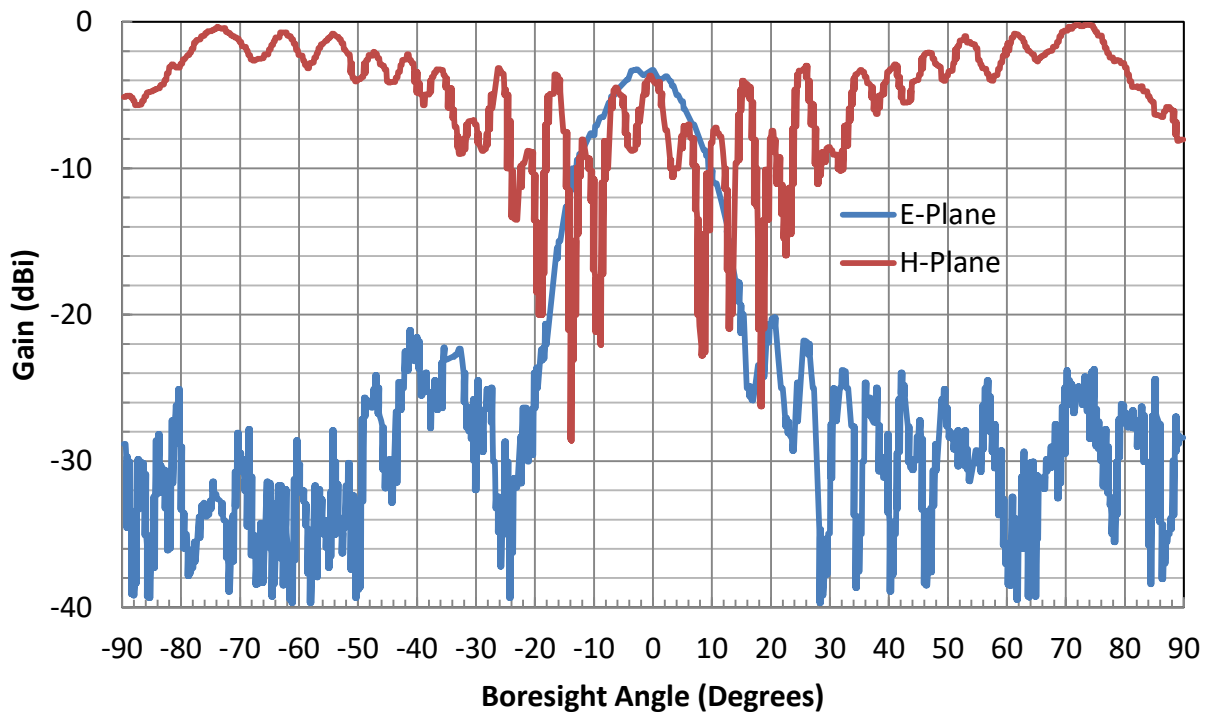




## 35 GHz Ranging Sensor Head, Dual Channel, Medium Range

### Mechanical Specifications:

Item	Specification
Gunn Oscillator Bias Port	Red Wire
Varactor Bias Port	Green Wire
Mixer IF <sub>I</sub> Port	Solder Pin
Mixer IF <sub>Q</sub> Port	Solder Pin
Mixer IF Ground	Solder Pin
Common Ground	Black Wire
Size	5.00" (W) X 1.31" (H) X 1.70" (L)
Material	Die Casted Zinc (Sensor Module), Aluminum (Mixer Housing & Horn)
Finish	Chem Film
Weight	4.5 Oz
Outline	SD-MA-19D

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [mm])

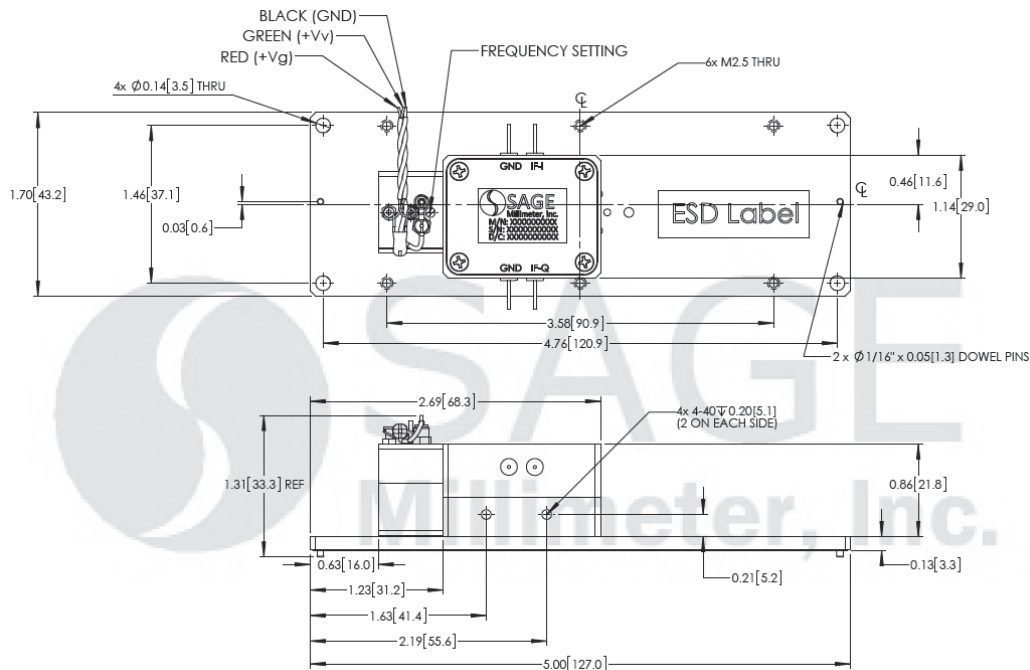

**Note:**

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- The device is static sensitive. Always follow ESD rules when working with the device.
- Wrong bias or reverse bias on the sensor will damage the device.
- Exceeding absolute maximum ratings shown will damage the device. Use additional heatsink or fan if necessary.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com