




## W Band Ranging Sensor Module, Dual Channel, 94 GHz, 5 GHz

### Description:

**Model SSP-94313-D1** is a W band ranging sensor module that is designed and manufactured for medium range measurements of a moving target's speed, travel direction and distance. The sensor module has an operating frequency range of 91.5 to 96.5 GHz and takes a nominal bias of +8.0 V<sub>DC</sub>/1,030 mA. The sensor module is configured with a varactor tuned oscillator, an isolator, an amplifier, a directional coupler, a circulator, and a balanced I/Q mixer. The directional coupler is used to sample the LO power to pump the mixer, and the circulator is used as a TX/RX diplexer. The varactor has tuning voltage range of 2.8 V<sub>DC</sub> to +30 V<sub>DC</sub> and provides ±2.5 GHz tuning bandwidth. Various antennas can be integrated with the module to form sensor heads for many system applications.

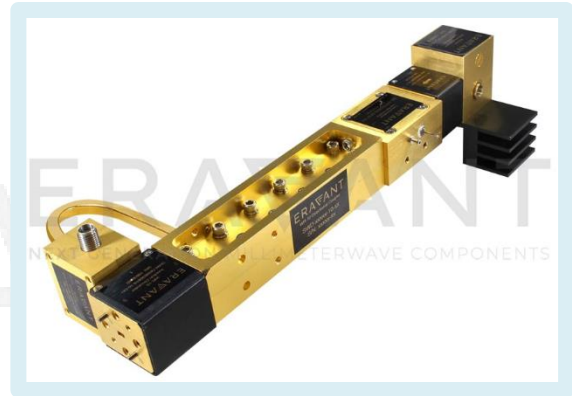

### Features:

- 94.0 GHz Operation
- Low FM/AM Noise and High Sensitivity
- Low Harmonic Emission
- Common Tx/Rx Port

### Applications:

- True Ranging Radar Systems
- Moving Target Direction Detection
- High Resolution Target Detection Systems
- Military Surveillance Systems

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Tx Frequency Range	91.5 GHz	94.00 GHz	96.5 GHz
Tx Frequency Tuning Bandwidth*		±2.5 GHz	
Tx Output Power		+13 dBm	
Rx Frequency Range	91.5 GHz	94.00 GHz	96.50 GHz
Rx IF Frequency Range	DC		5 GHz
I/Q Phase Unbalance		±15°	
Rx Conversion Loss		12 dB	
Frequency Stability		-6.0 MHz/°C	
Power Stability		-0.05 dB/°C	
Varactor Tuning Voltage	2.8 V <sub>DC</sub>		+30 V <sub>DC</sub>
Varactor Tuning Speed		1 μS	
Gunn Bias Voltage*		+4.5 V <sub>DC</sub>	+5.5 V <sub>DC</sub>
Gunn Bias Current		780 mA	
Amplifier Bias Voltage		+8 V <sub>DC</sub>	+15 V <sub>DC</sub>
Amplifier Bias Current		250 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

\*Note: If the SOR-R3 regulator is used, the required DC bias voltage to regulator input is +8 V<sub>DC</sub>.






## W Band Ranging Sensor Module, Dual Channel, 94 GHz, 5 GHz

### Mechanical Specifications:


Item	Specification
Tx/Rx Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
IF Ports	SMA (F), SMA (F)
DC Bias Port (Vg)	SMA (F)
Varactor Bias Port (Vv)	Solder Pins
Material	Aluminum and Brass
Finish	Gold Plated
Weight	5 Oz
Size	8.06" (L) X 3.80" (W) X 1.99" (H)
Outline	SP-NWEV-D1-A

### Typical Conversion Loss vs. Frequency

RF Power = -20 dBm

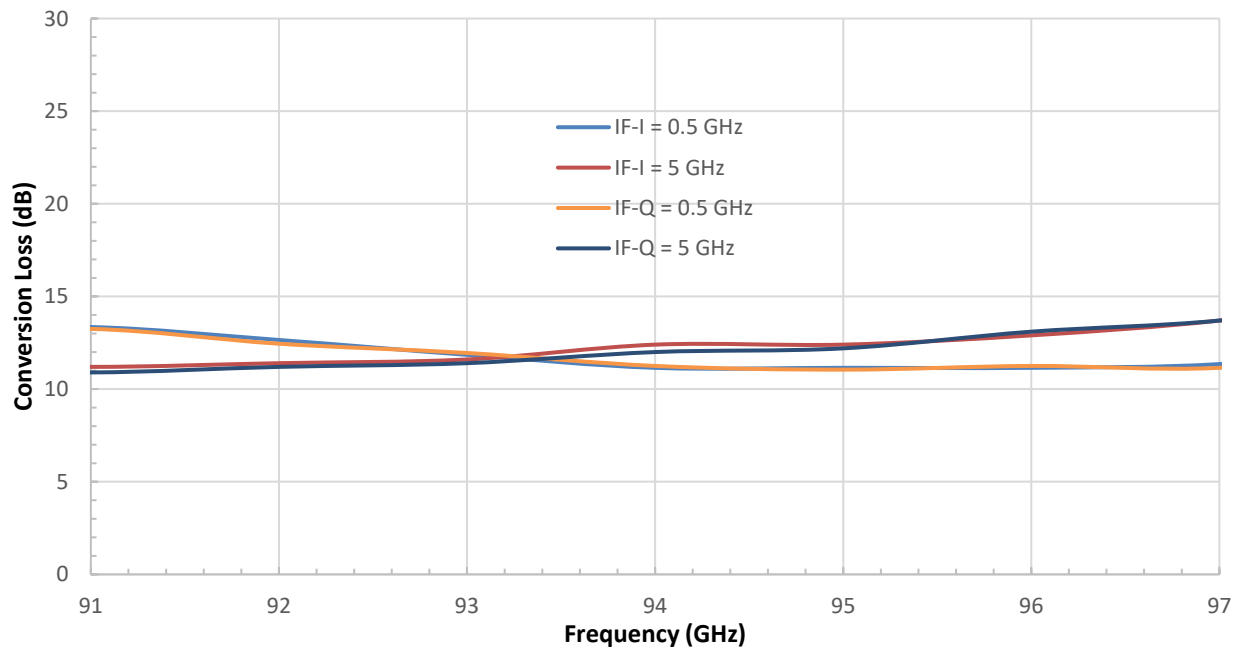


### Block Diagram:

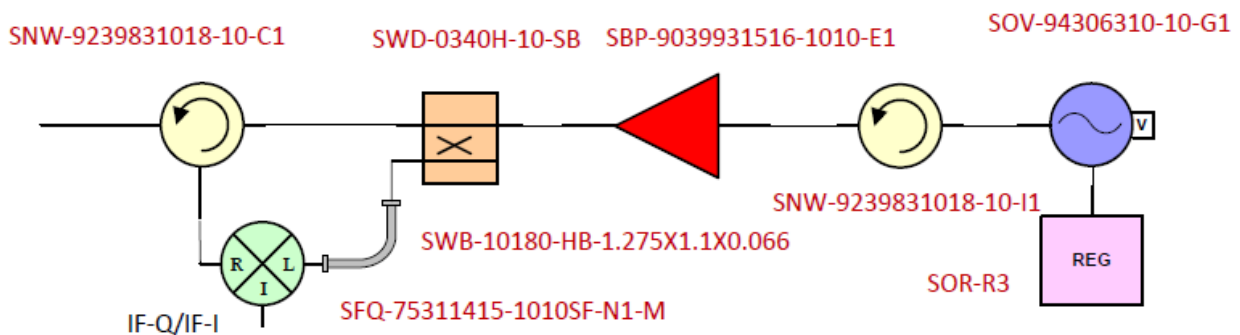

## W Band Ranging Sensor Module, Dual Channel, 94 GHz, 5 GHz

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

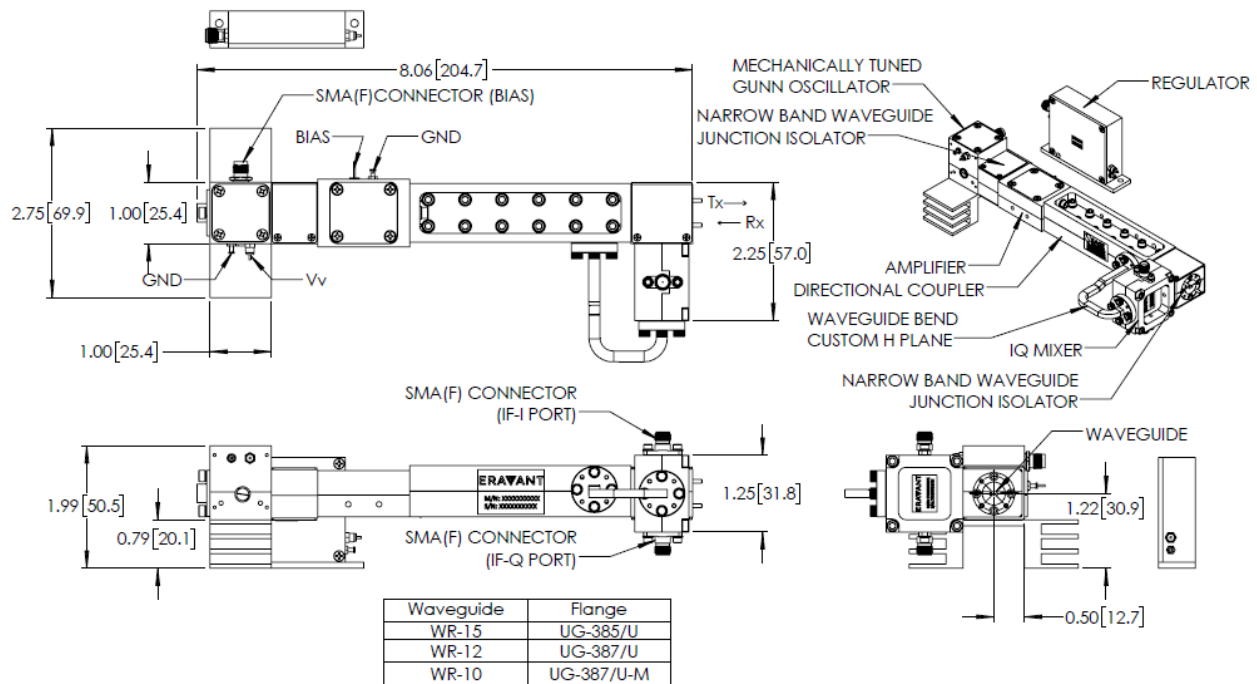

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing as performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.

**Caution:**

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Any foreign objects in the waveguide will cause performance degradation and possibly damage the device.
- The case temperature of the device shall never exceed +50 °C. Use a proper heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**



## W Band Ranging Sensor Module, Dual Channel, 94 GHz, 5 GHz

The Outline of the Gunn Oscillator Regulator Model [SOR-R3](#). (Unless otherwise specified, all dimensions are in inches.)

