

## Q-Band Compact Fixed Attenuator, 6 dB, Insertion Length 1.5"

**STA-06-22-F1-C-1.5** is a compact fixed attenuator with an insertion length of 1.5". The attenuator is used in millimeterwave systems and operates from 33 to 50 GHz. The attenuator has a fixed attenuation value of 6 dB at the center frequency, 41.5 GHz. While the attenuator is designed and fabricated for full waveguide band applications, the attenuation value of this model does show a minor slope within the band due to its distinct mechanical configuration. Other attenuation values are available under different model numbers as **STA-XX-22-F1-C-1.5**, where **XX** is the desired attenuation value.



## **Electrical Specifications:**

Parameter	Minimum	Typical	Maximum
Frequency	33 GHz		50 GHz
Attenuation @ 41.5 GHz		6 dB	
Return Loss		20 dB	
Power Handling			0.5 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

## Mechanical Specifications:

ltem	Specification		
Waveguide Ports	WR-22 Waveguide with UG-383/U Anti-Cocking Flange		
Setting	Fixed		
Insertion Length	1.50"		
Material	Aluminum		
Finish	Gold Plated		
Weight	0.8 Oz		
Outline	WF-BQ-A		

#### **ECCN**

EAR99

## **FEATURES**

- Full Band Coverage
- Low Cost
- Accurate Attenuation Value at Center Frequency
- Compact Design

## **APPLICATIONS**


- Test Lab
- Instrumentations
- System Integration

### **SUPPLEMENTAL DETAILS**




# **ERA**FANT

## **Typical Performance vs. Frequency**

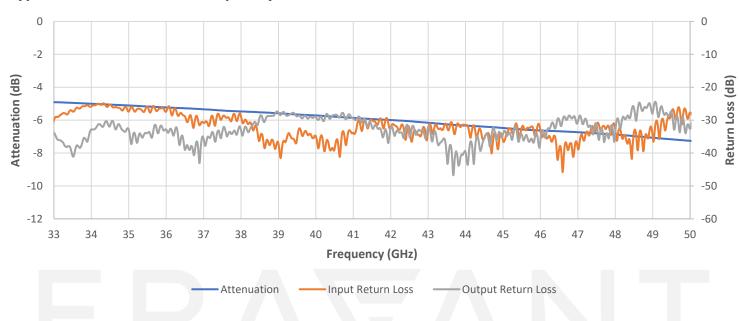

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

## MAKING MILLIMETERWAVE ACCESSIBLE

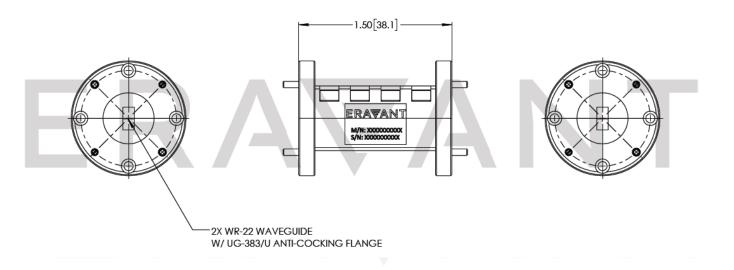

MAKING MILLIMETERWAVE ACCESSIBLE



### NOTE:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

#### **CAUTION:**

- Exceeding absolute maximum ratings will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

# ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE

# ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE