


WR-34 Fixed Attenuator, 6 dB

Description:

Model STA-06-34-F2 is a 6 dB fixed attenuator that is used in millimeterwave systems and operates from 22 to 33 GHz. The attenuator has a fixed attenuation value of 6 dB at center frequency, 27.5 GHz. While the attenuator is designed and fabricated for full waveguide band applications, the attenuation value of this model does show a minor slope within the band due to its distinct mechanical configuration. Various attenuation values are available under different model numbers.

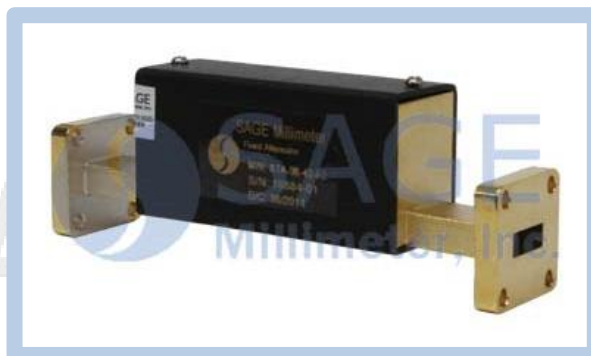

Features:

- Full Band Coverage
- Low Cost
- Accurate Attenuation Value at Center Frequency

Applications:

- Test Lab
- Instrumentations
- System Integration

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency Range	22.0 GHz		33.0 GHz
Attenuation @ 27.5 GHz		6.0 dB	
Return Loss		23 dB	
Power Handling		0.75 W	1.0 W
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C


Mechanical Specifications:

Item	Specification
RF Input	WR-34 Waveguide with UG-1530/U Flange
RF Output	WR-34 Waveguide with UG-1530/U Flange
Setting	Fixed
Insertion Length	4.00"
Finish	Gold Plated Waveguide Faces; Black Painted Body
Weight	3.2 Oz
Outline	TA-F3-BX1




WR-34 Fixed Attenuator, 6 dB

Typical Performance vs Frequency

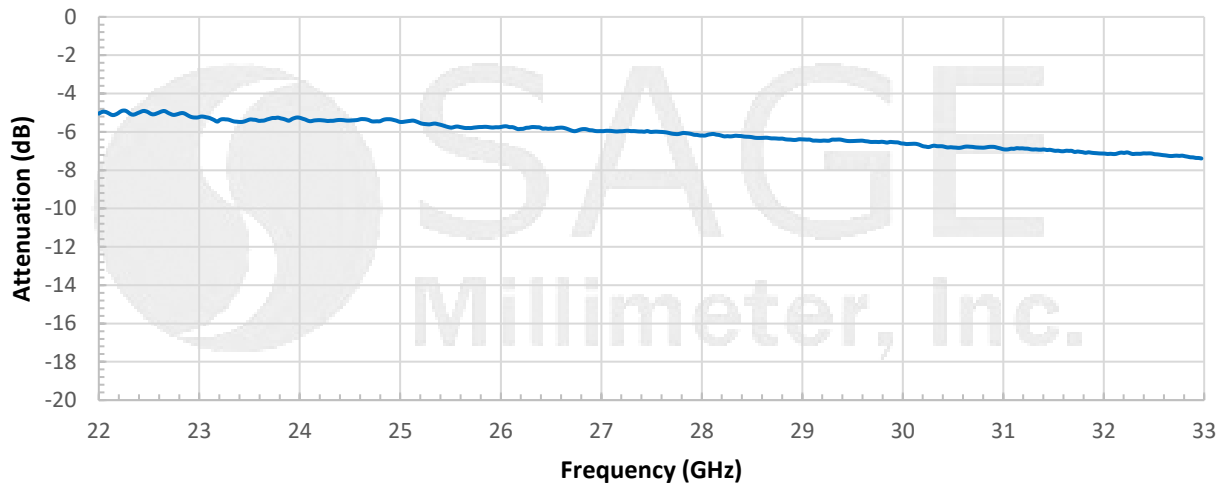

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

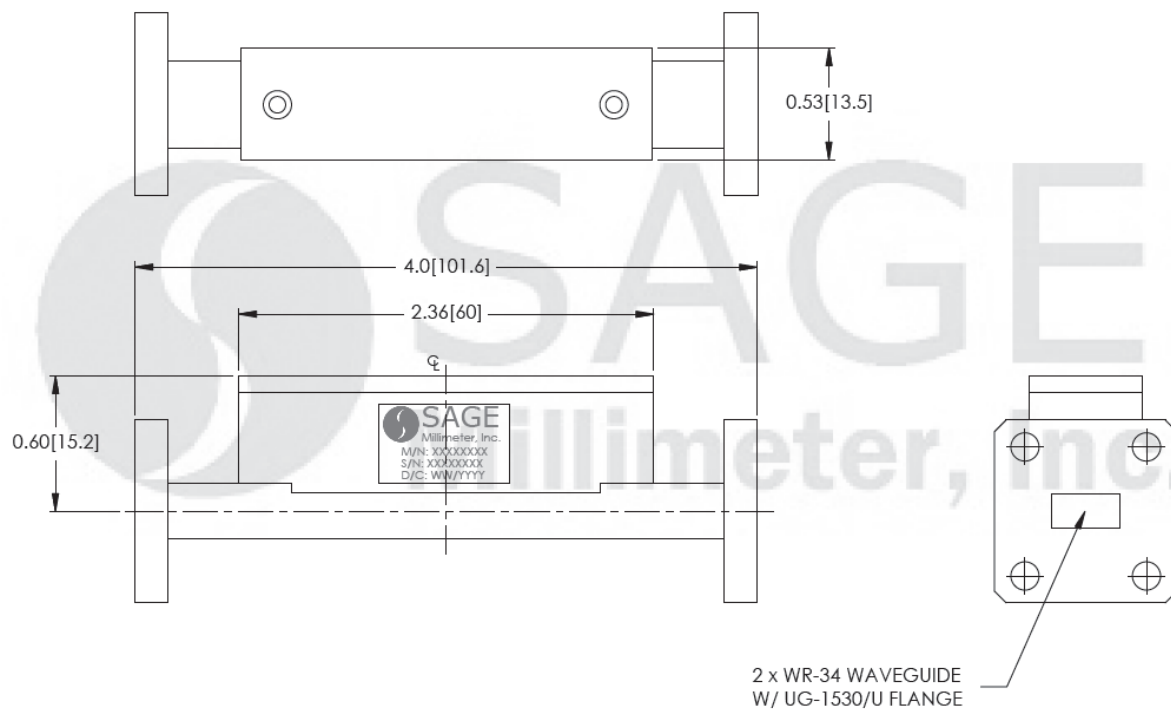

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.



WR-34 Fixed Attenuator, 6 dB

Caution:

- RF power should never exceed 1000 mW.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

