



WR-34 Fixed Attenuator, 10 dB

Description:

Model STA-10-34-F2 is a 10 dB fixed attenuator that is used in millimeterwave systems and operates from 22 to 33 GHz. The attenuator has a fixed attenuation value of 10 dB at center frequency, 27.5 GHz. While the attenuator is designed and fabricated for full waveguide band applications, the attenuation value of this model does show a minor slope within the band due to its distinct mechanical configuration. Various attenuation values are available under different model numbers.



Features:

- Full Band Coverage
- Low Cost
- Accurate Attenuation Value at Center Frequency

Applications:

- Test Lab
- Instrumentations
- System Integration

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency Range	22.0 GHz		33.0 GHz
Attenuation @ 27.5 GHz		10 dB	
Return Loss		23 dB	
Power Handling		0.75 W	1.0 W
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C


Mechanical Specifications:

Item	Specification
RF Input	WR-34 Waveguide with UG-1530/U Flange
RF Output	WR-34 Waveguide with UG-1530/U Flange
Setting	Fixed
Insertion Length	4.00"
Finish	Gold Plated Waveguide Faces; Black Painted Body
Weight	3.2 Oz
Outline	TA-F3-BX1




WR-34 Fixed Attenuator, 10 dB

Typical Performance vs Frequency

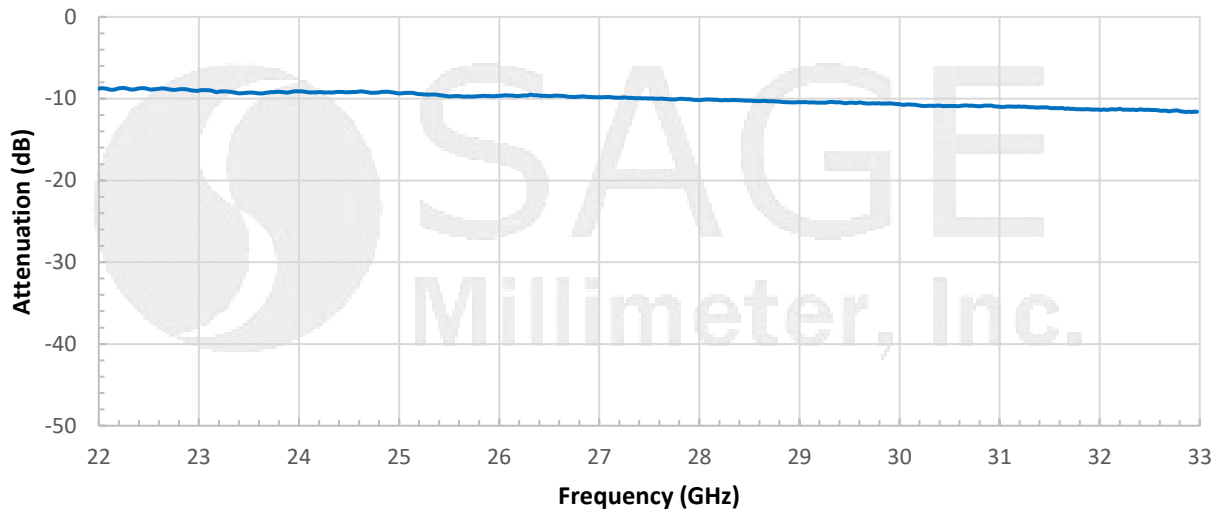

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

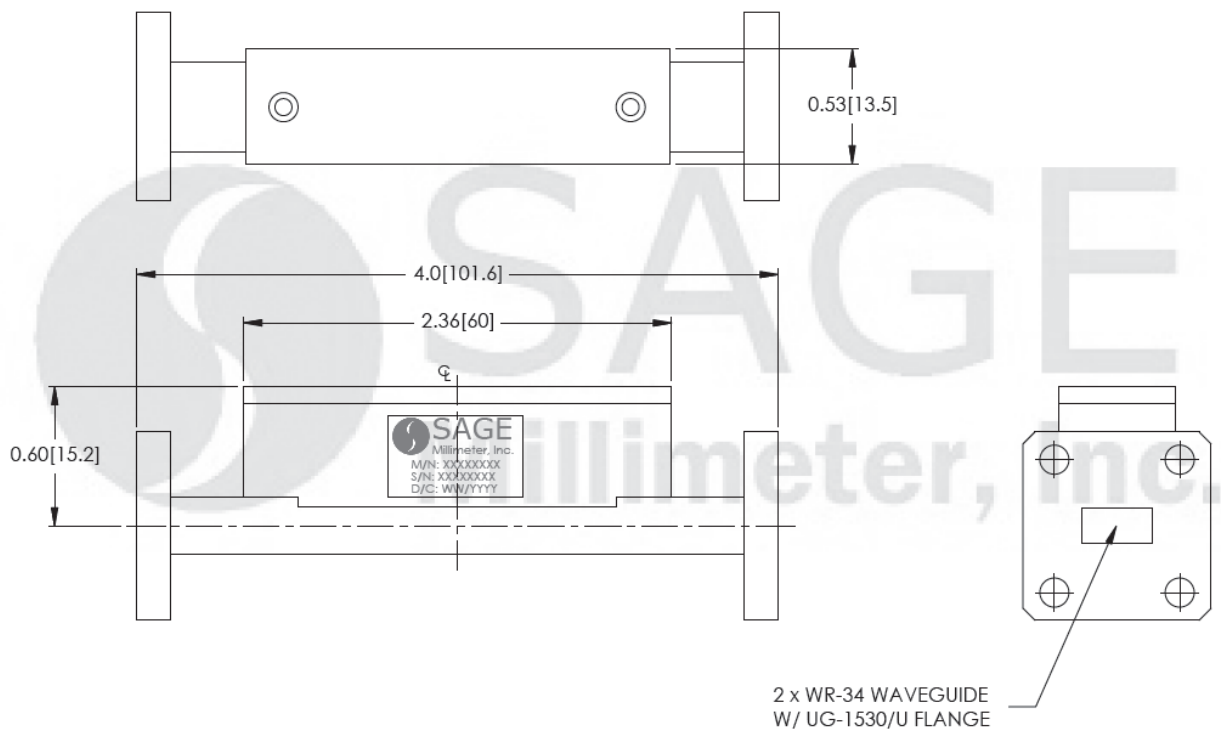

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.



WR-34 Fixed Attenuator, 10 dB

Caution:

- RF power should never exceed 1000 mW.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

