



D-Band Fixed Attenuator, 30 dB

Description:

Model STA-30-06-F2 is a 30 dB fixed attenuator that is used in millimeterwave systems and operates from 110 to 170 GHz. The attenuator has a fixed attenuation value of 30 dB at the center frequency, 140 GHz. While the attenuator is designed and fabricated for full waveguide band applications, the attenuation value of this model



does show a minor slope within the band due to its distinct mechanical configuration. Various attenuation values are available under different model numbers.

Features:

- Full Band Coverage
- Low Cost
- Accurate Attenuation Value at Center Frequency

Applications:

- Test Lab
- Instrumentations
- System Integration

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	110 GHz		170 GHz
Attenuation @ 140 GHz		30 dB	
Return Loss		16 dB	
Power Handling			300 mW
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
RF Ports	WR-06 Waveguide with UG-387/U-M Flange
Setting	Fixed
Insertion Length	2.50"
Flange Material	360 Brass
Waveguide Material	C10100 Copper
Finish	Gold Plated, Black Paint
Weight	1.6 Oz
Outline	TA-FD-L2






D-Band Fixed Attenuator, 30 dB

Typical Performance vs Frequency

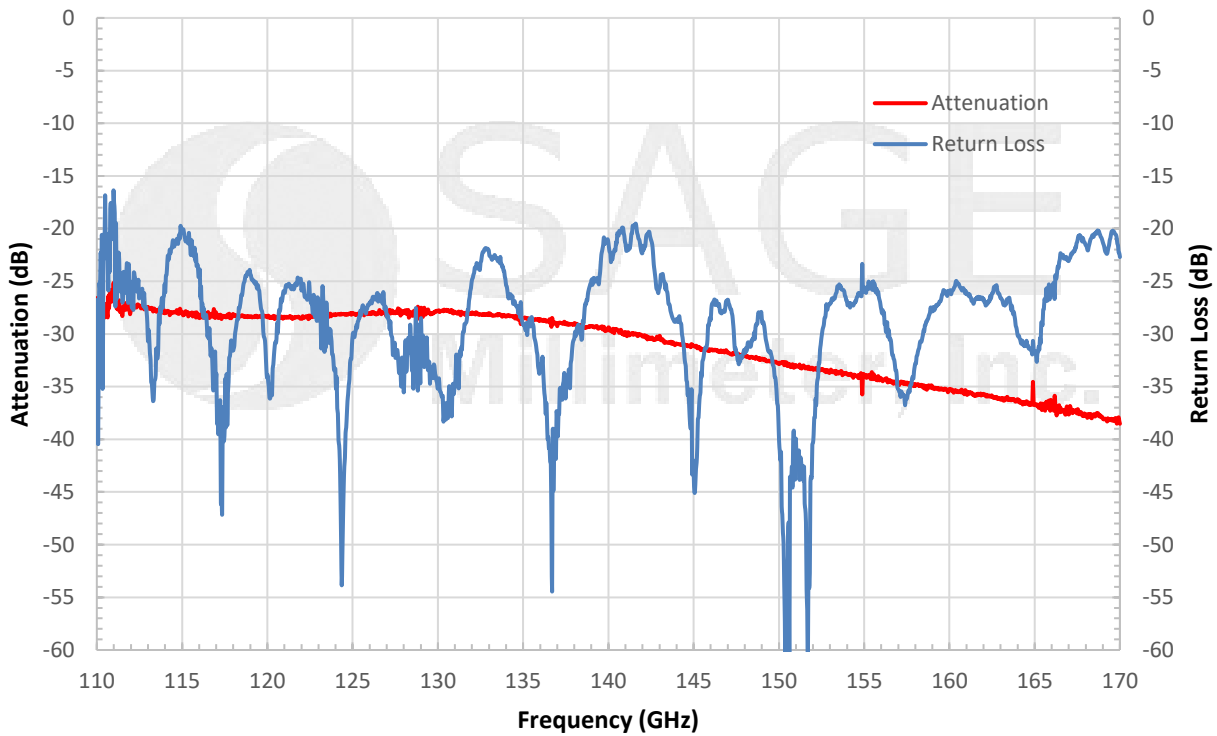

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

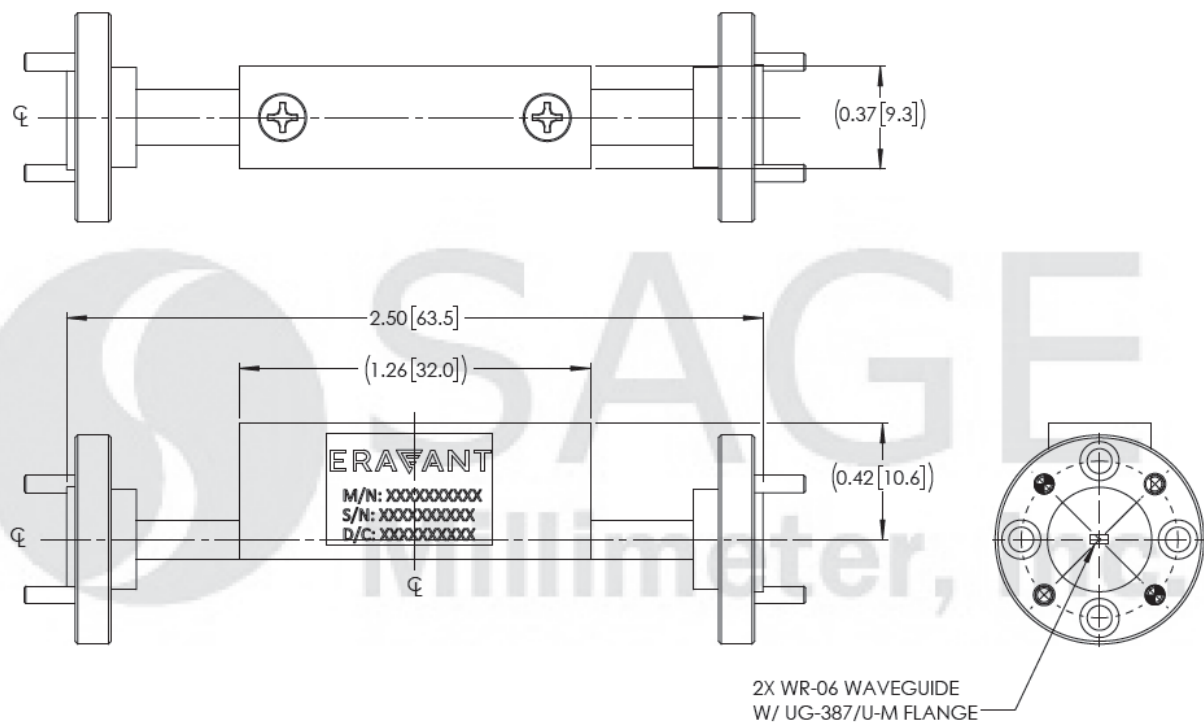

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

D-Band Fixed Attenuator, 30 dB

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

