

**E-Band, X6 Full Band Frequency Extender, 60 to 90 GHz,  
+20 dBm Pout**

**STE-SF612-16-S1-C** is compact X6 frequency extender. The extender has an input frequency of 10 to 15 GHz with a typical input power of +3 dBm and an output frequency of 60 to 90 GHz with a typical output power of +20 dBm. The extender also has a typical harmonic suppression of -20 dBc. The DC power requirement for the multiplier is +8 V<sub>DC</sub>/850 mA. The input port configuration is a female SMA connector and the output is a WR-12 waveguide with a UG-387/U anti-cocking flange. The compact design offers a practical solution for frequency extending. Self-stored calibration data with a USB-C port for fast, direct data access. Other port configurations are available under different model numbers.

**Electrical Specifications:**

Parameter	Minimum	Typical	Maximum
Input Frequency	10 GHz		15 GHz
Input Power		+3 dBm	+20 dBm
Output Frequency	60 GHz		90 GHz
Output Power		+20 dBm	
Harmonic Suppression		-20 dBc	
Spurious		-60 dBc	
Port Return Loss		10 dB	
DC Voltage	+6 V <sub>DC</sub>	+8 V <sub>DC</sub>	+16 V <sub>DC</sub>
DC Supply Current		850 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

**Mechanical Specifications:**

Item	Specification
Input Port	SMA (F)
Output Port	WR-12 Waveguide with UG-387/U Anti-Cocking Flange
DC Bias	2.5 mm DC Jack (AC to DC power converter include)
Material	Various
Finish	Various
Weight	1.5 lbs
Size	2.36" (W) x 3.83" (L) x 4.17" (H)
Outline	TE-WG-A-C

**ECCN**

EAR99

**FEATURES**

- Low Harmonic Emission
- Broad Band Coverage
- High Output Power
- Compact
- Calibration Data Stored in Memory

**APPLICATIONS**


- Frequency Extenders
- Source Modules
- Communication Systems
- Lab Instrumentation

**SUPPLEMENTAL DETAILS**

STE-SF612-16-S1-C


Output Power vs. Frequency

Bias: +12V<sub>DC</sub>/986 mA; Input Power = +3 dBm

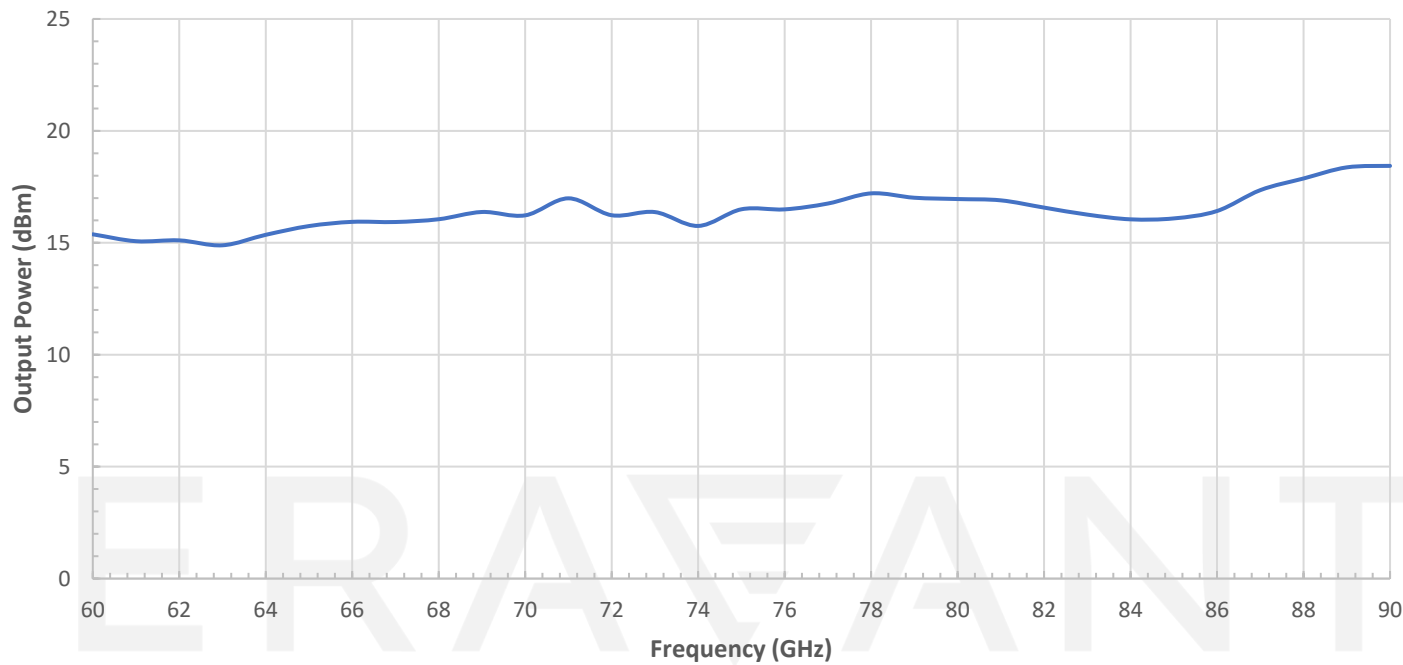


Harmonic Suppression vs. Frequency

Bias: +12V<sub>DC</sub>/986 mA; Input Power = +3 dBm

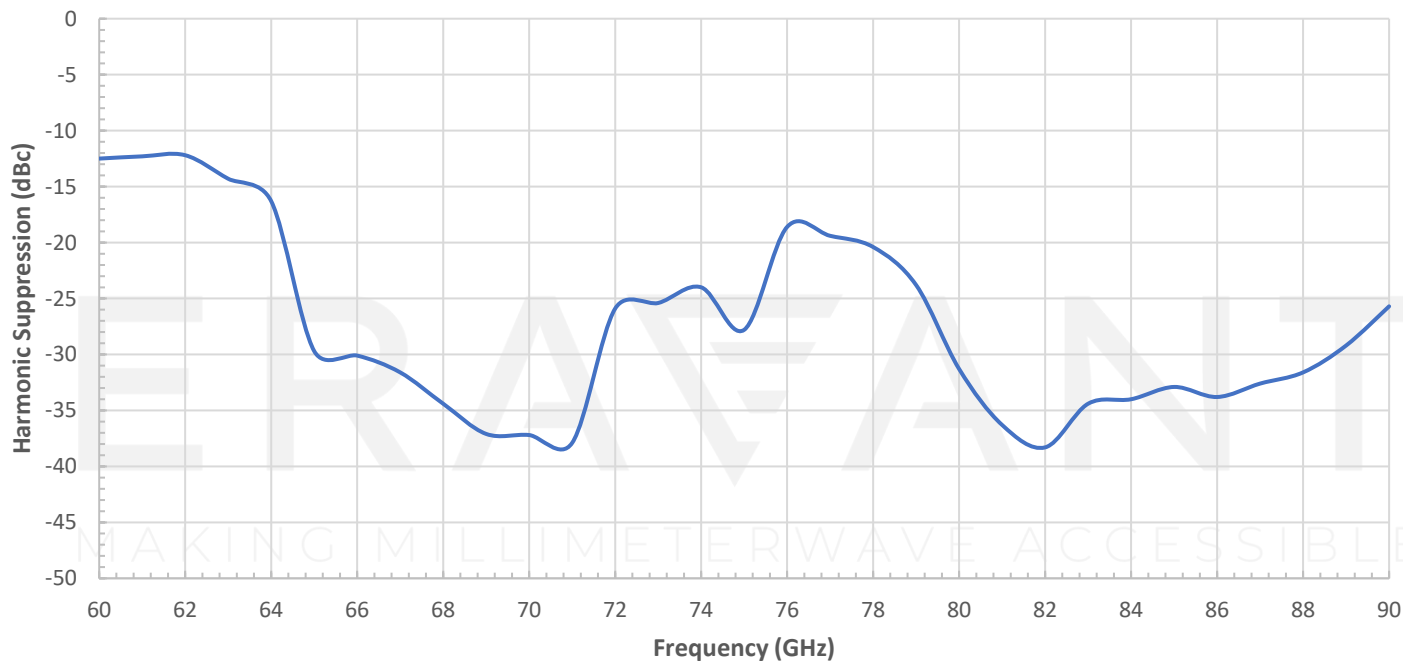

## STE-SF612-16-S1-C

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

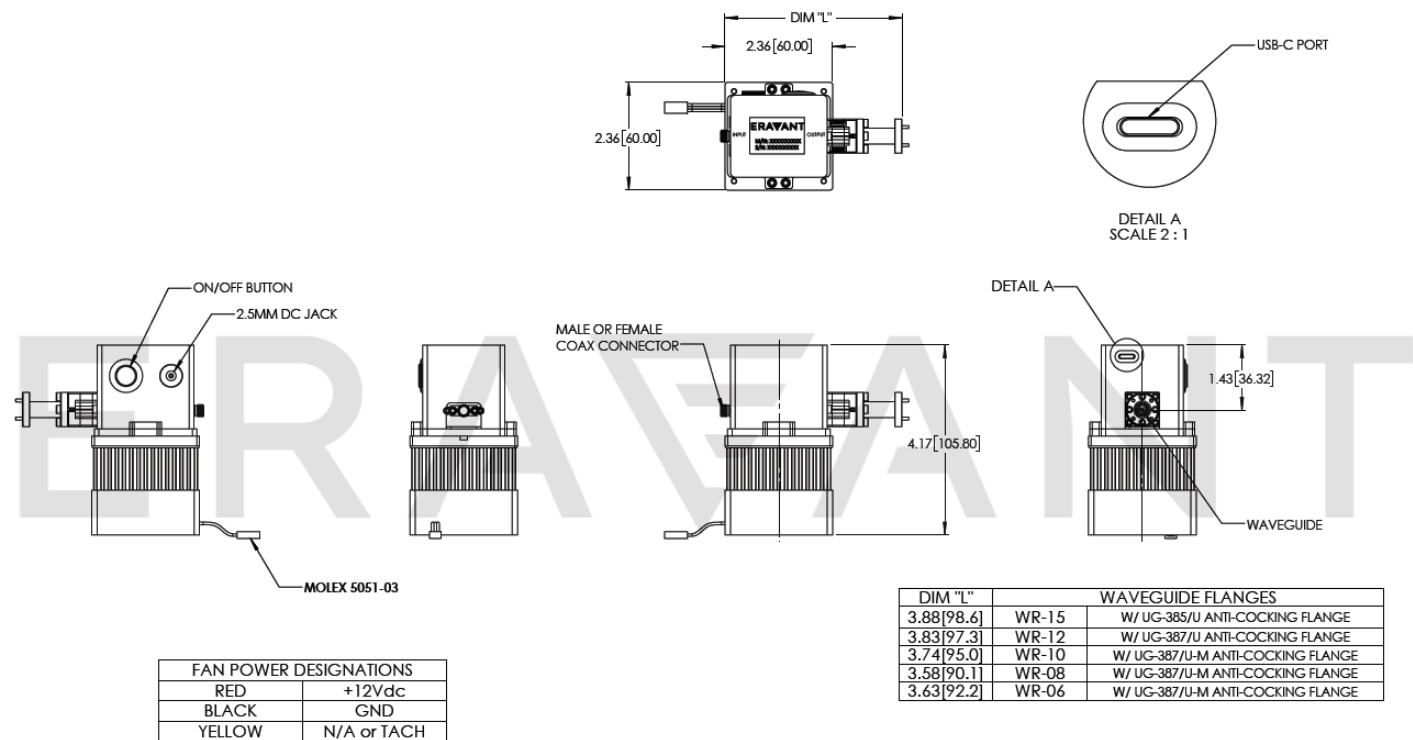

**NOTE:**

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

**CAUTION:**

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended.

MAKING MILLIMETERWAVE ACCESSIBLE