



## E-Band Fixed Attenuator, 20 dB, Insertion Length 1.2"

### Description:

**Model STA-20-12-F1-C-1.2** is a compact fixed attenuator with insertion length of 1.2". The attenuator is used in millimeterwave systems and operates from 60 to 90 GHz. The attenuator has a fixed attenuation value of 20 dB at the center frequency, 75 GHz. While the attenuator is designed and fabricated for full waveguide band applications, the attenuation value of this model does show a minor slope within the band due to its distinct mechanical configuration. Various attenuation values are available under different model numbers.



### Features:

- Full Band Coverage
- Low Cost
- Accurate Attenuation Value at Center Frequency
- Compact Design

### Applications:

- Test Lab
- Instrumentations
- System Integration

### Electrical Specifications:

| Parameter                 | Minimum | Typical | Maximum    |
|---------------------------|---------|---------|------------|
| Frequency                 | 60 GHz  |         | 90 GHz     |
| Attenuation @ 75 GHz      |         | 20 dB   |            |
| Return Loss               |         | 20 dB   |            |
| Power Handling            |         |         | 0.5 W (CW) |
| Specification Temperature |         | +25 °C  |            |
| Operating Temperature     | -40 °C  |         | +85 °C     |

### Mechanical Specifications:


| Item             | Specification                        |
|------------------|--------------------------------------|
| RF Ports         | WR-12 Waveguide with UG-387/U Flange |
| Setting          | Fixed                                |
| Material         | Aluminum                             |
| Finish           | Gold Plated                          |
| Weight           | 0.4 Oz                               |
| Insertion Length | 1.2"                                 |
| Outline          | TA-FE-1.2                            |






## E-Band Fixed Attenuator, 20 dB, Insertion Length 1.2"

### Typical Attenuation vs. Frequency

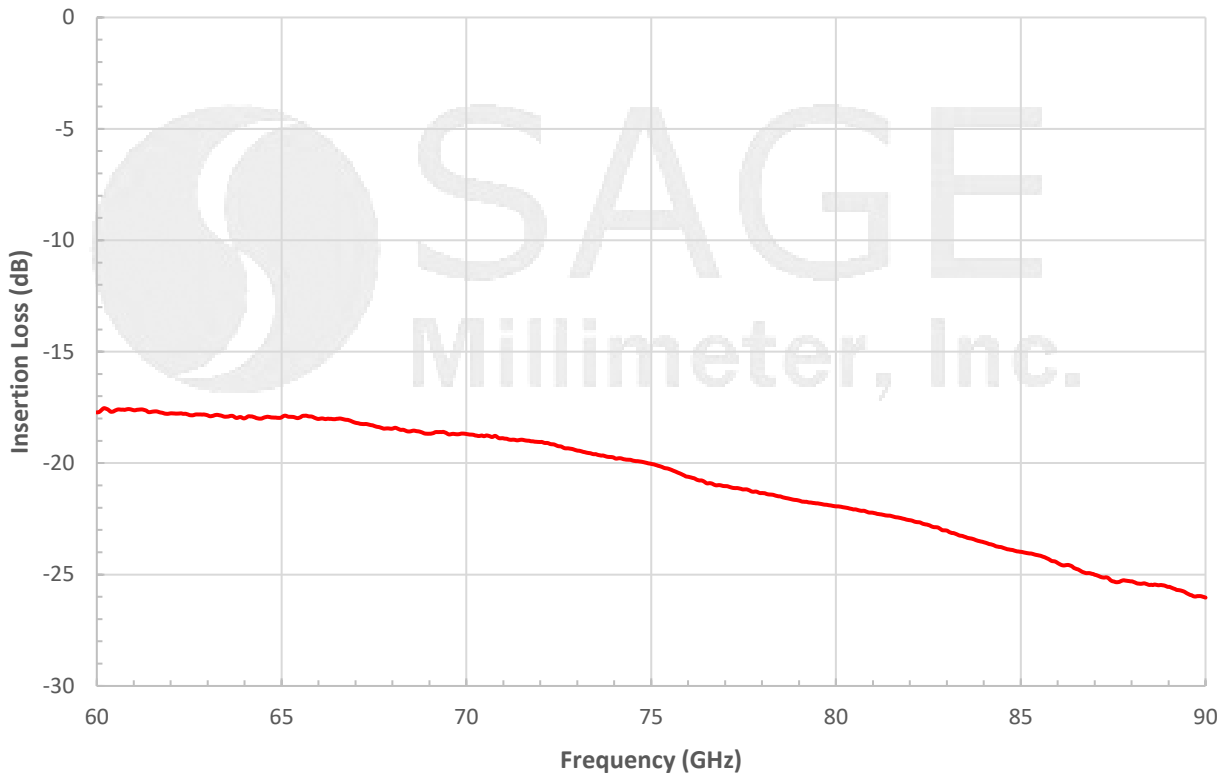

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

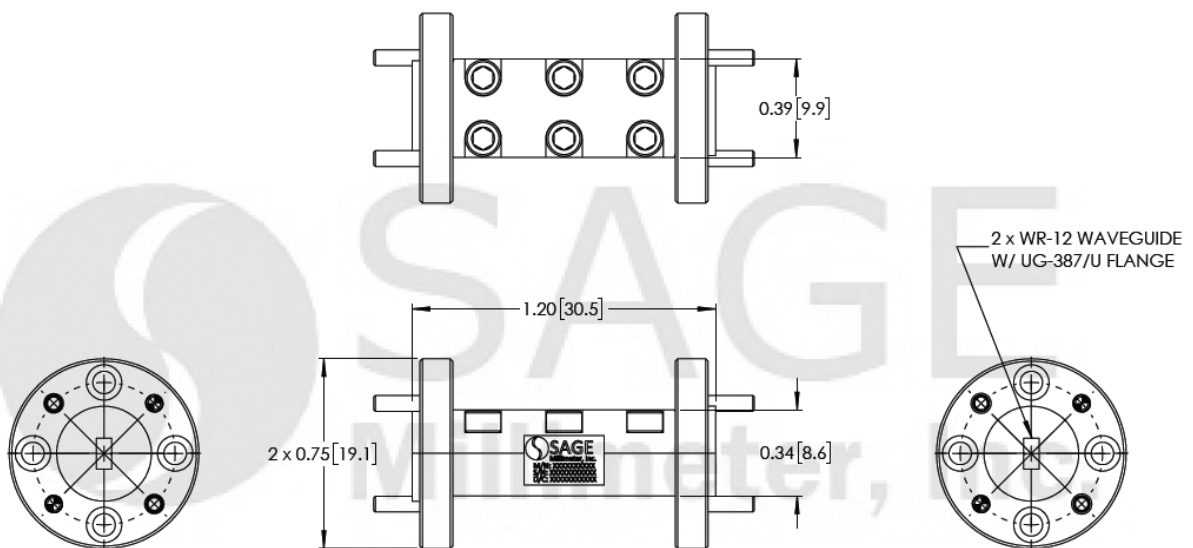

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

## E-Band Fixed Attenuator, 20 dB, Insertion Length 1.2”

- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

### Caution:

- Exceeding absolute maximum ratings will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

