



D-Band Full Waveguide Band Compact Faraday Isolator, 90° Twist

Description:

Model STF-06-91-C is a full band Faraday isolator that operates from 110 to 170 GHz. The Faraday isolator is constructed with a longitudinal, magnetized ferrite rod that causes a Faraday rotation of the incoming RF signal. The compact, robust package is ideal for system integration and testing applications and features a 90° twist between the input port and output port. The Faraday isolator offers 28 dB typical isolation and 3.0 dB nominal insertion loss with good flatness. The input and output ports are WR-06 waveguides with UG-387/U-M flanges. An in-line configuration is available under model number STF-06-S1-C.



Features:

- Full Waveguide Band Operation
- Moderate Insertion Loss
- High Isolation
- Compact Form Factor

Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency Range	110 GHz		170 GHz
Insertion Loss		3.0 dB	3.5 dB
Isolation		28 dB	
Return Loss		14 dB	
Power Handling		0.8 W	1.0 W

Mechanical Specifications:


Item	Specification
RF Input and Output	WR-06 Waveguide with UG-387/U-M Flange
Material	Aluminum
Finish	Gold Plated and Black Anodized
Weight	0.8 Oz
Insertion Length	0.90"
Outline	TF-SD-9C






D-Band Full Waveguide Band Compact Faraday Isolator, 90° Twist

Typical Insertion Loss and Isolation vs. Frequency

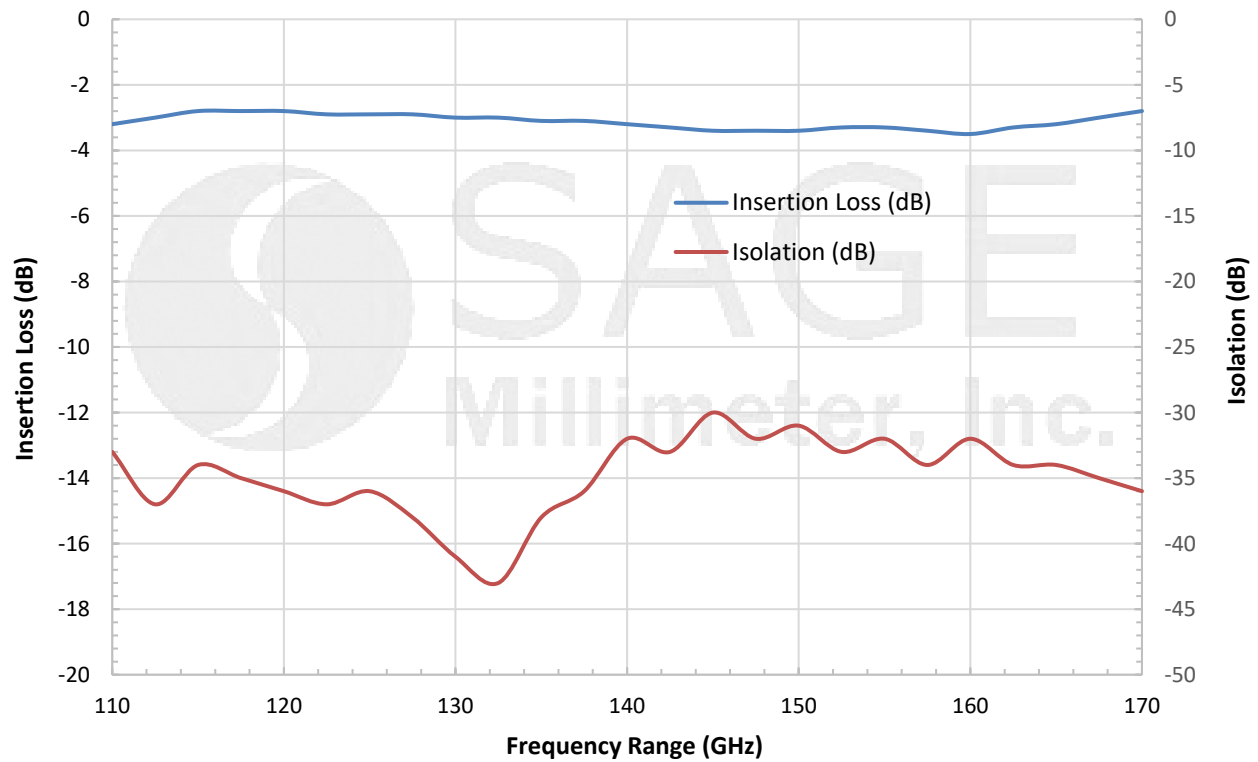

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

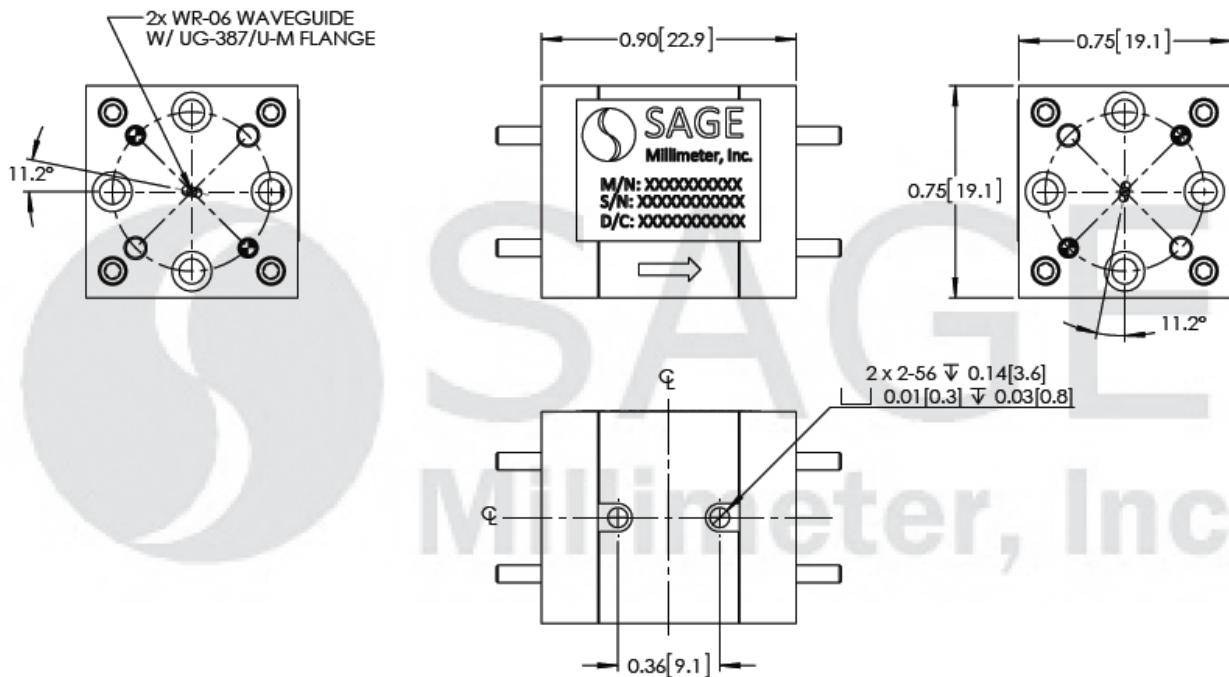

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



D-Band Full Waveguide Band Compact Faraday Isolator, 90° Twist

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25°C case temperature.
- In-line configuration is available under model number **STF-06-S1-C**.
- Other custom mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings of the device will damage the device.
- The device is sensitive to magnetic fields. Always keep magnet fields 6 inches away.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

