

STF-22-S1-C

Q-Band, Compact Faraday Isolator

STF-22-S1-C is a WR-22 Faraday isolator that operates from 33 to 50 GHz. The Faraday isolator is constructed with a longitudinal, magnetized ferrite rod that causes a Faraday rotation of the incoming RF signal. The compact, robust package is highly ideal for system integration and subassemblies where space is at a premium and allows for backside access for waveguide screws. The isolator offers 30 dB typical isolation and 1.2 dB typical insertion loss. The input and output ports are WR-22 waveguides with UG-383/U anti-cocking flanges. A 90-degree twisted version of this isolator is available under model **STF-22-91-C**.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	33 GHz		50 GHz
Insertion Loss		1.2 dB	
Isolation		30 dB	
Return Loss		16 dB	
Power Handling			1.5 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
Waveguide Ports	WR-22
Flange	UG-383/U Anti-Cocking
Insertion Length	2.0"
Material	Aluminum
Finish	Gold Plated
Weight	3 Oz
Outline	TF-SQ-A-C

ECCN

EAR99

FEATURES

- Full Band Coverage
- Low Insertion Loss
- High Isolation
- Compact Form Factor
- Backside Flange Screw Access

APPLICATIONS


- Test Lab
- Instrumentations
- Subassemblies

SUPPLEMENTAL DETAILS



STF-22-S1-C

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

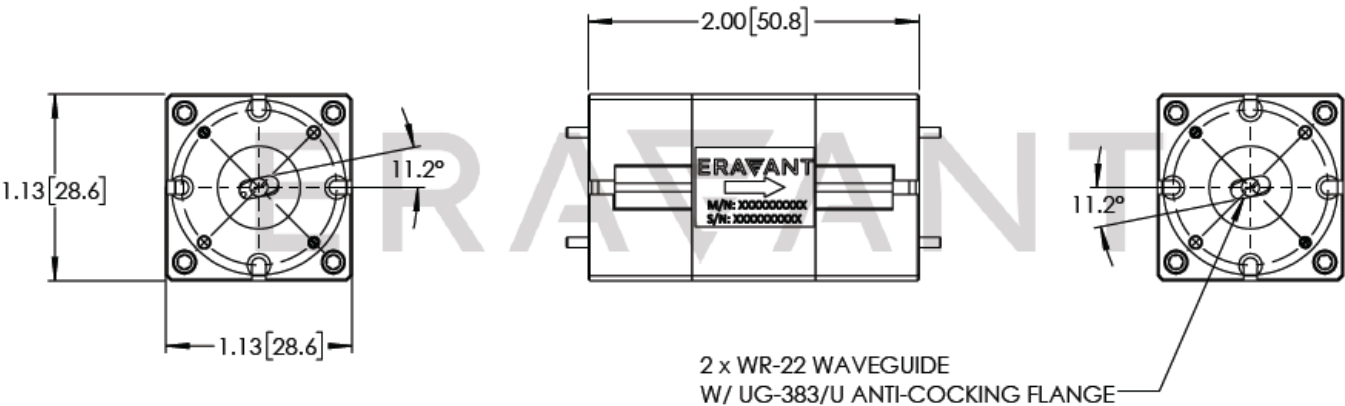

NOTE:

- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings will damage the device.
- The device is sensitive to magnetic fields. Always keep magnet fields 6 inches away.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.