

## STF-22-S1-WPC

## Q-Band Faraday Isolator

**STF-22-S1-WPC** is a full band Faraday isolator that operates from 33 to 50 GHz. The Faraday isolator is constructed with a longitudinal, magnetized ferrite rod that causes a Faraday rotation of the incoming RF signal. The Faraday isolator offers 30 dB typical isolation and 1.2 dB nominal insertion loss with good flatness. The return loss of the isolator is 14 dB. The input and output ports are WR-22 waveguides with UG-383/U anti-cocking flanges.



## Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	33 GHz		50 GHz
Insertion Loss		1.2 dB	1.4 dB
Isolation	25 dB	30 dB	
Return Loss		14 dB	
Power Handling		1.5 W (CW)	2.0 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

## Mechanical Specifications:

Item	Specification
Input Port	WR-22 Waveguide with UG-383/U Anti-Cocking Flange
Output Port	WR-22 Waveguide with UG-383/U Anti-Cocking Flange
Waveguide Flange Material	Brass
Waveguide Flange Finish	Gold Plated
Cover Material	Aluminum
Cover Finish	Black Anodized
Weight	5.0 Oz
Insertion Length	2.69"
Outline	TF-SQ-A

## ECCN

EAR99

## FEATURES

- Full Waveguide Band Operation
- Moderate Insertion Loss
- High Isolation
- Instrumentation Grade

## APPLICATIONS


- Test Labs
- Instrumentations
- Sub-assemblies

## SUPPLEMENTAL DETAILS




## STF-22-S1-WPC

### Typical Performance vs. Frequency

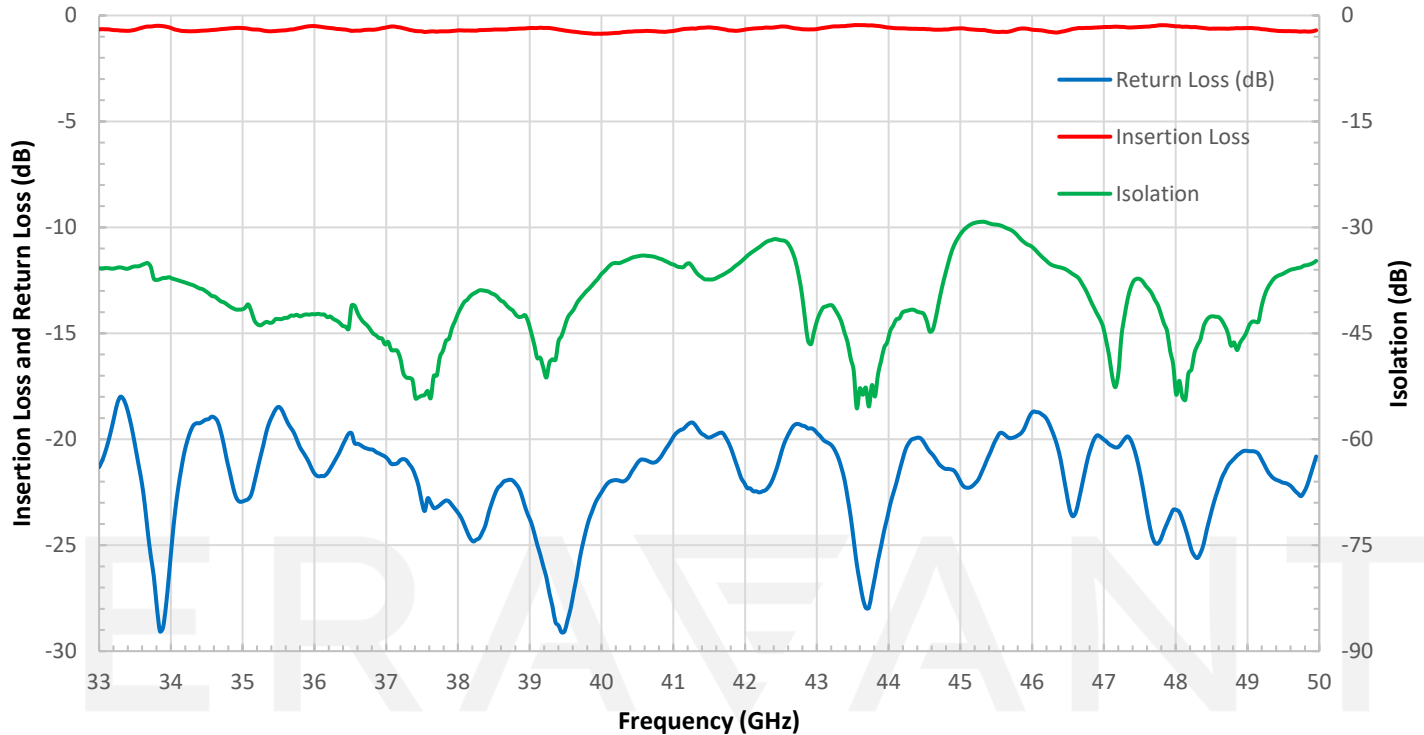

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

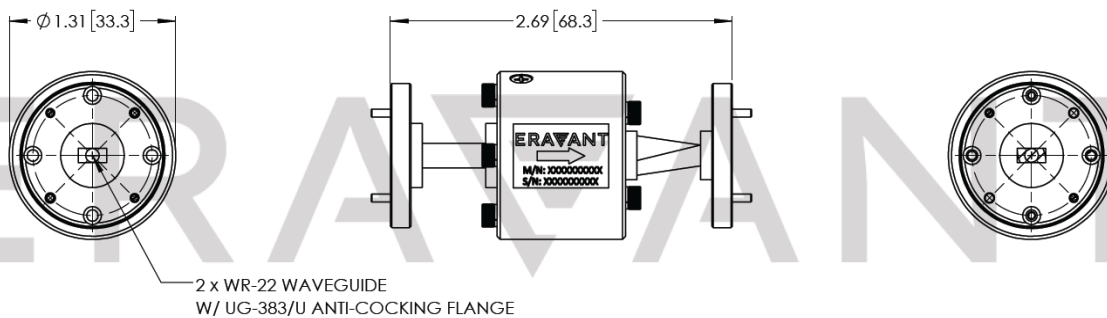

#### NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- The model with orthogonal input and output ports is offered under model number STF-22-91.
- Other custom mechanical configurations are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.

#### CAUTION:

- Exceeding absolute maximum ratings will damage the device.
- The device is sensitive to magnetic fields. Always keep magnet fields 6 inches away.
- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.