

WR-06 E-Plane Waveguide Bend, 90°, Precision Machined

Description:

Model STQ-WB-06090-E1-1.0 is a 90°, WR-06 E-plane waveguide bend with UG-387/U-M Anti-Cocking flanges. The bend radius is 1.0". The waveguide bend covers the frequency range of 110 to 170 GHz. The waveguide bend is manufactured with precision machining as a split-block body, which results in a robust, reinforced mechanical structure that will not flex or bend compared to traditional waveguide sections made with thin-wall tubing and brazed joints. Other bend angles and bend radius are available under different model numbers.



Features:

- Frequency Range: 110 to 170 GHz
- Sturdy Split-Block Mechanical Structure

Applications:

- Test Instrumentation
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	110 GHz		170 GHz
Insertion Loss		1.5 dB*	
Return Loss		23 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

*Performance may be reduced at band edges.


Mechanical Specifications:

Item	Specification
Waveguide Size	WR-06 Waveguide with UG-387/U-M Anti-Cocking Flange
Bend Plane	E Plane
Bend Angle	90 Degrees
Bend Radius Length (A)	1.0"
Bend Radius Length (B)	1.0"
Material	Brass
Finish	Gold Plated
Weight	1.4 oz.
Outline	WB-ED-A-SB-L




WR-06 E-Plane Waveguide Bend, 90°, Precision Machined

Typical Performance vs Frequency

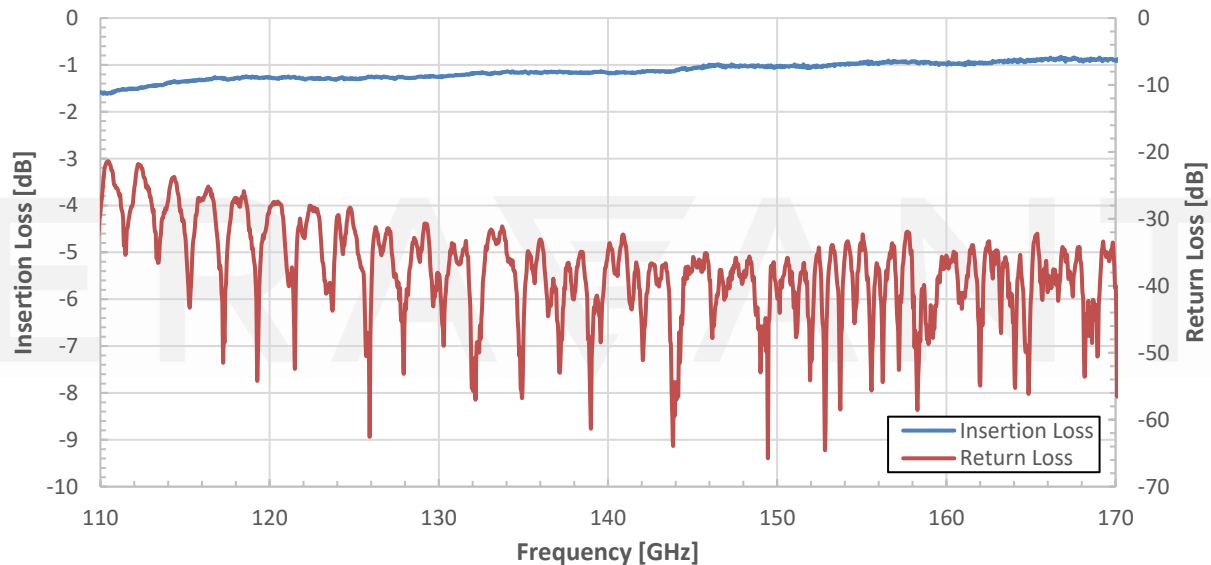

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

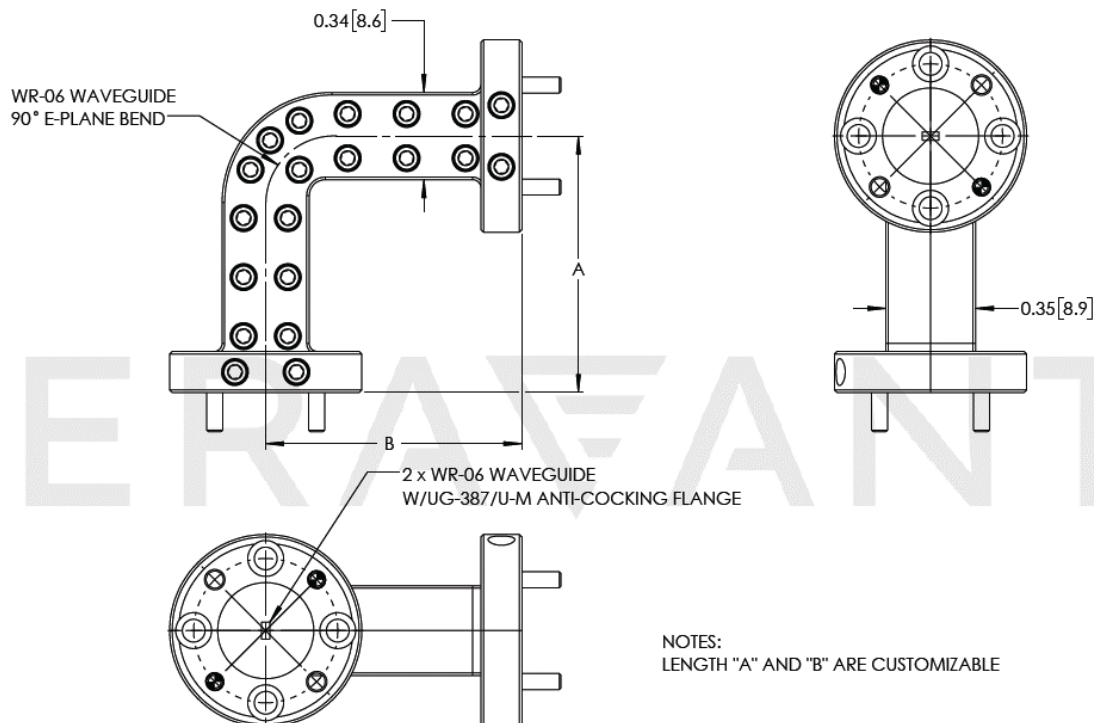

NOTES:
LENGTH "A" AND "B" ARE CUSTOMIZABLE

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- Eravant reserves the right to change the information presented without notice.



www.eravant.com | 501 Amapola Ave, Torrance, CA 90501
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com