

ERAVANT

SWC-180KF-R3-WRD and SWC-180KM-R3-WRD

WRD-180 Waveguide to 2.92 mm Connector Adapter, Right Angle

SWC-180KF-R3-WRD and SWC-180KM-R3-WRD are right angle (90°) WRD-180 double ridged waveguide to coax adapters that cover the frequency range of 18 to 40 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the double ridged waveguide and 2.92 mm (K) coax connector.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	18 GHz		40 GHz
Insertion Loss		0.5 dB	
Return Loss		12 dB	
Power Handling			20 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

*Insertion loss is tested back-to-back with a male and female adapter; the result is divided by 2.

Mechanical Specifications:

Item	Specification
Waveguide Port	WRD-180 Double Ridged Waveguide with FPWRD180C24 Flange
Coaxial Port	2.92 mm (K) Female for Model Number: SWC-180KF-R3-WRD
Coaxial Port	2.92 mm (K) Male for Model Number: SWC-180KM-R3-WRD
Material	Copper/Brass
Finish	Gold Plated
Weight	2.0 Oz
Outline	WC-180KR-WRD

ECCN

EAR99

FEATURES

- Broad Band Coverage
- Low Insertion Loss
- Instrumentation Grade

APPLICATIONS


- Test Lab
- Instrumentations
- Sub-assemblies

SUPPLEMENTAL DETAILS




SWC-180KF-R3-WRD and SWC-180KM-R3-WRD

Typical Measured Performance vs Frequency

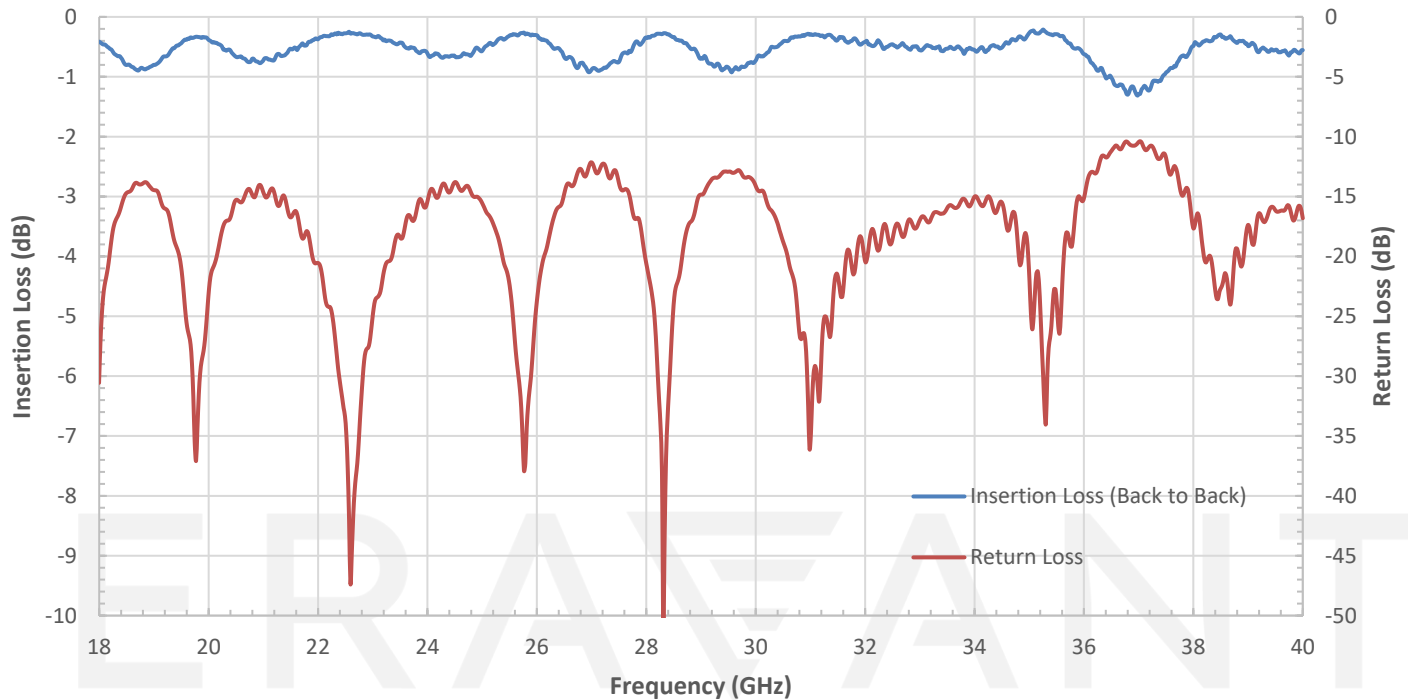

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

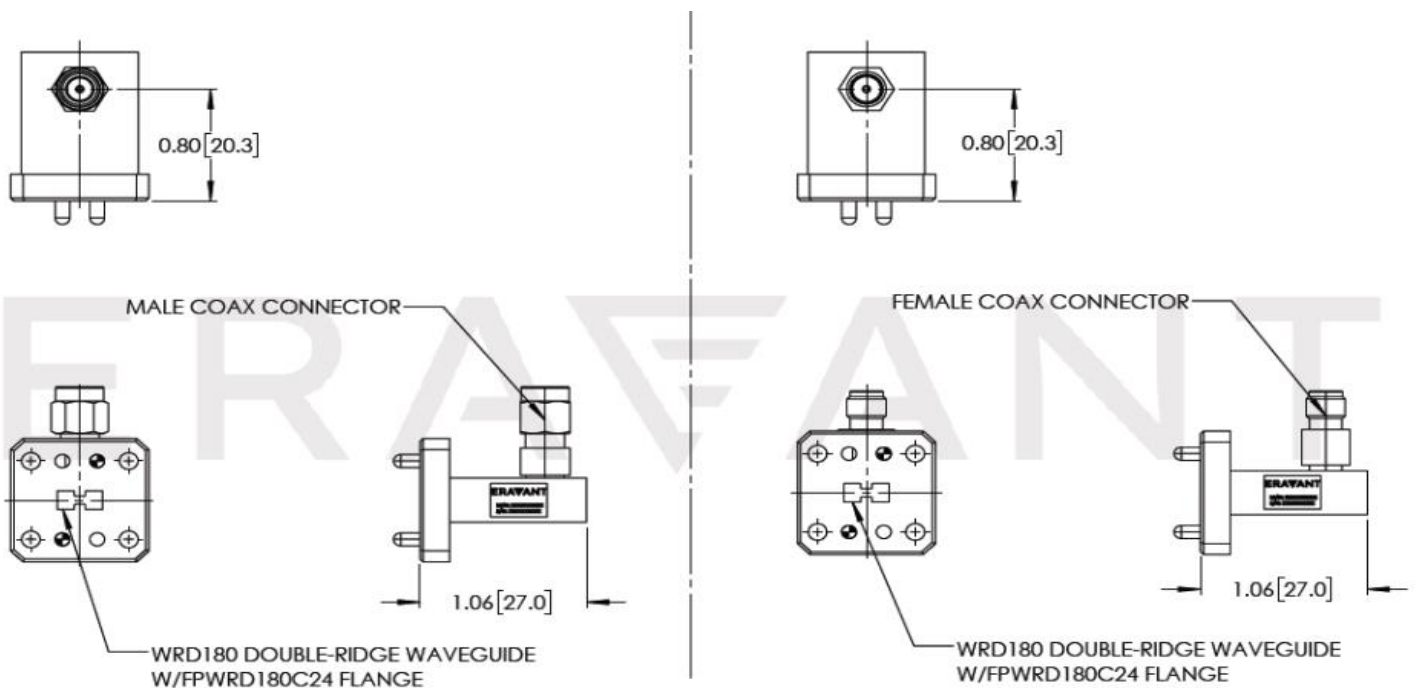

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE