



U-Band Waveguide to 2.4 mm Connector Adapter, Right Angle

Description:

Models **SWC-192F-R1** and **SWC-192M-R1** are right angle (90°) U-Band waveguide to coax adapters that cover the frequency range of 40 to 52 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 2.4 mm coax connector. The end launch (180°) versions are offered under model numbers SWC-192F-E1 and SWC-192M-E1.



Features:

- 40 to 52 GHz Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Open Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	40 GHz		52 GHz
Insertion Loss*		0.5 dB	0.8 dB
Return Loss	16 dB	18 dB	
Power Handling			40 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

*Insertion Loss is tested back-to-back with a male and female adapter, the result is divided by 2.

Mechanical Specifications:


Item	Parameter
Waveguide	WR-19 with UG383/U-M Flange
Coaxial	2.4 mm (F) for Model Number: SWC-192F-R1
Coaxial	2.4 mm (M) for Model Number: SWC-192M-R1
Size	1.00" (L) x 1.13" (Ø)
Housing Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WC-UR






U-Band Waveguide to 2.4 mm Connector Adapter, Right Angle

Typical Return Loss & Back to Back Insertion Loss vs. Frequency

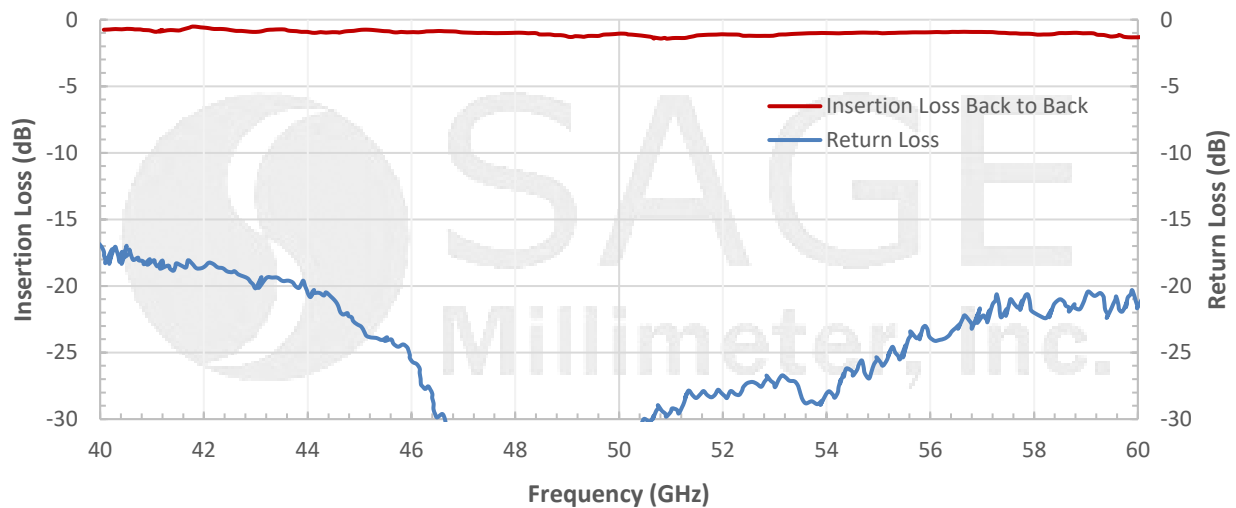

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

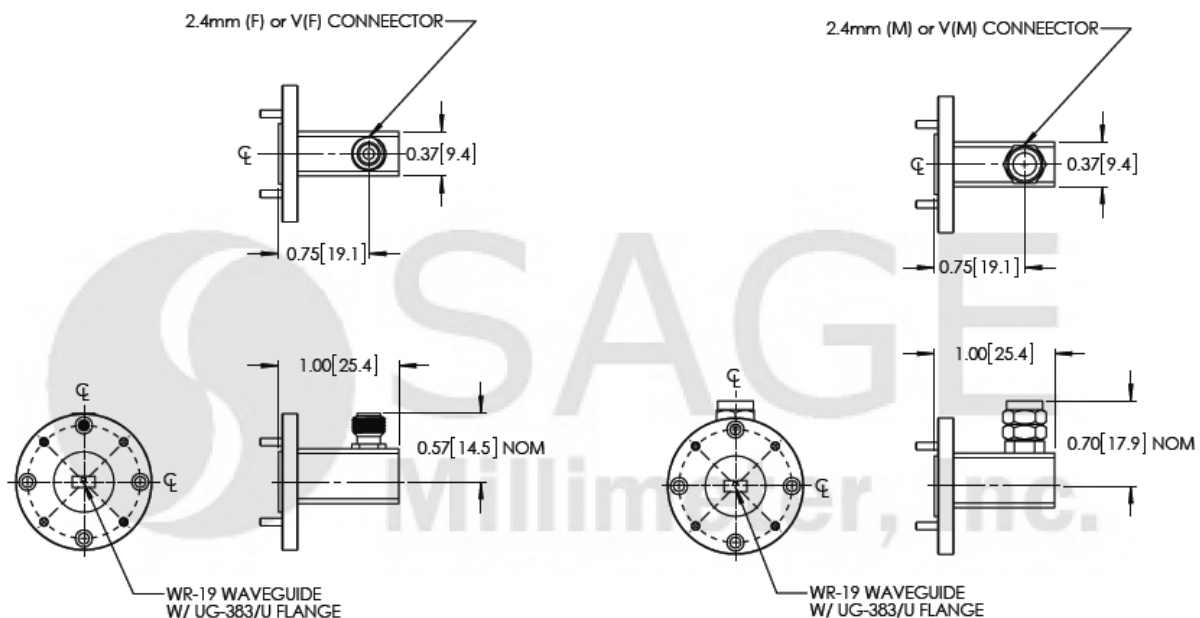

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com