

## V-Band Direct Reading Attenuator, High Precision 70 dB Attenuation

**STA-60-15-D8-WP** is an instrumentation grade, high precision and high attenuation range direct reading, rotary vane attenuator for use in millimeter wave test sets across the standard V-band frequency range of 50 to 75 GHz. The attenuator has a large scale calibrated dial which indicates the attenuation value directly. The attenuator is an ideal piece of equipment in waveguide systems where a broad direct reading of attenuation is required. The attenuator exhibits exceptional repeatability during frequent attenuation setting operations. The attenuator exhibits 0.7 dB typical insertion loss and up to maximum 70 dB attenuation. The accuracy of the attenuator is 0.1 dB or 1% of the reading up to 60 dB, and “for reference only” above 70 dB.



### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency Range	50 GHz		75 GHz
Insertion Loss		0.7 dB	1.0 dB
Attenuation Range	0 dB		60 dB
Attenuation Accuracy	0.1 dB or 1% of reading, whichever is larger, up to 60 dB		
Return Loss		23 dB	
Power Handling			150 mW (CW)
Specification Temperature		+25°C	
Operating Temperature	+5°C		+35°C

### Mechanical Specifications:

Item	Specification
RF Ports	WR-15 Waveguide with UG-385/U Flange
Reading	Large Scale Dial
Scale Increments	0.01 dB (0 to 4 dB); 0.1 dB (4 to 30 dB); 0.2 dB (30 to 50 dB)
Flange Material	Brass
Finish	Gold Plated Waveguide Flange; Black Painted Body
Weight	26 Oz
Insertion Length	3.94" [100 mm]
Outline	TA-DV-F1

### ECCN

EAR99

### FEATURES

- Full Waveguide Band Coverage
- Large Scaled Dial
- High Attenuation Accuracy
- Waveguide Moding Free

### APPLICATIONS


- Test Lab
- Bit Error Rate Testing
- Fade Margin
- Transceiver Diversity

### SUPPLEMENTAL DETAILS




STA-60-15-D8-WP

Measured Attenuation vs. Frequency

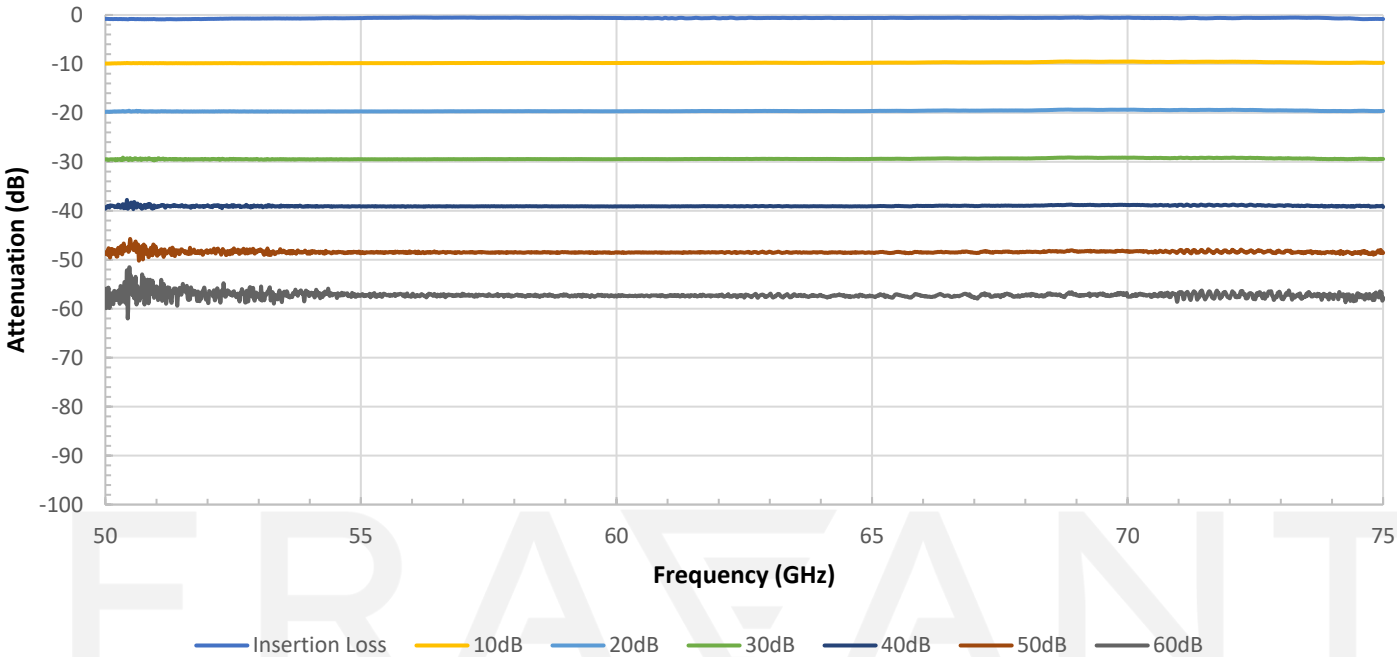

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

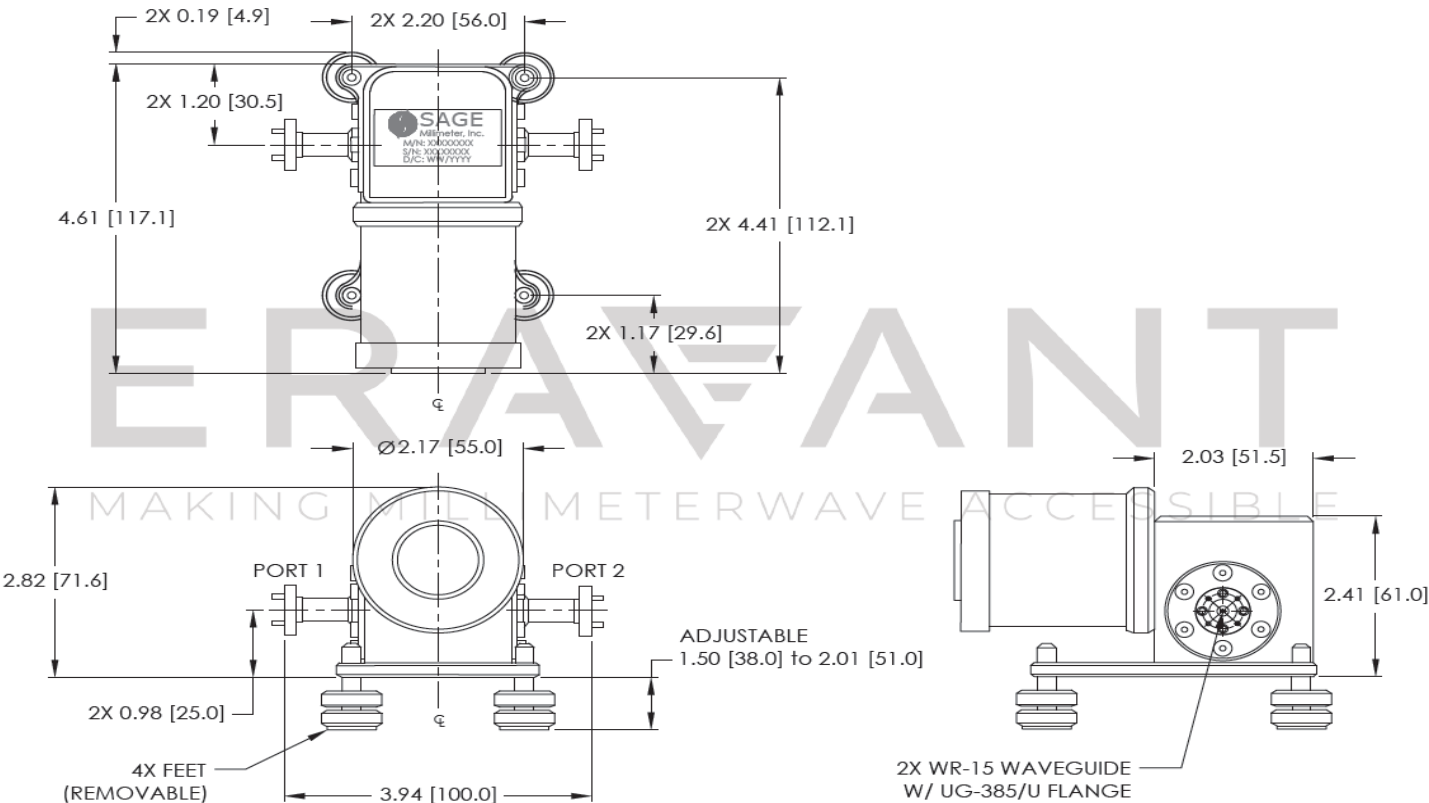

**NOTE:**

- Test data provided is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- Calibration accuracy is 0.1 dB or 1% of the reading, whichever is greater, for attenuation ranges up to 60 dB and “for reference only” above 70 dB.
- The phase shift value does change while varying the attenuator.
- Other mechanical configurations are available under different model numbers,
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- Exceeding absolute maximum ratings shown will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE