

**WR-34 Band Waveguide to 2.92mm Connector Adapter, Right Angle**

**SWC-34KF-R1-WPC** is a right angle (90°) WR-34 waveguide to coax adapters that cover the frequency range of 22 to 33 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 2.92 mm (K) coax connector. The end launch (180°) versions are offered under model numbers SWC-34KF-E1 and SWC-34KM-E1.

**Electrical Specifications:**

Parameter	Minimum	Typical	Maximum
Frequency Range	22 GHz		33 GHz
Insertion Loss		0.35 dB	0.5 dB
Return Loss	17 dB	20 dB	
Power Handling			50 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

**Mechanical Specifications:**

Item	Specification
Waveguide	WR-34 Waveguide with UG-1530/U Flange
Coaxial Port	2.92 mm (K) Female
Material	Aluminum
Finish	Gold Plated
Weight	0.5 Oz
Outline	WC-3R

**ECCN**

EAR99

**FEATURES**

- Broad Band Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Open Circuit


**APPLICATIONS**

- Test Lab
- Instrumentations
- Sub-assemblies

**SUPPLEMENTAL DETAILS**


SWC-34KF-R1-WPC

Typical Performance vs. Frequency

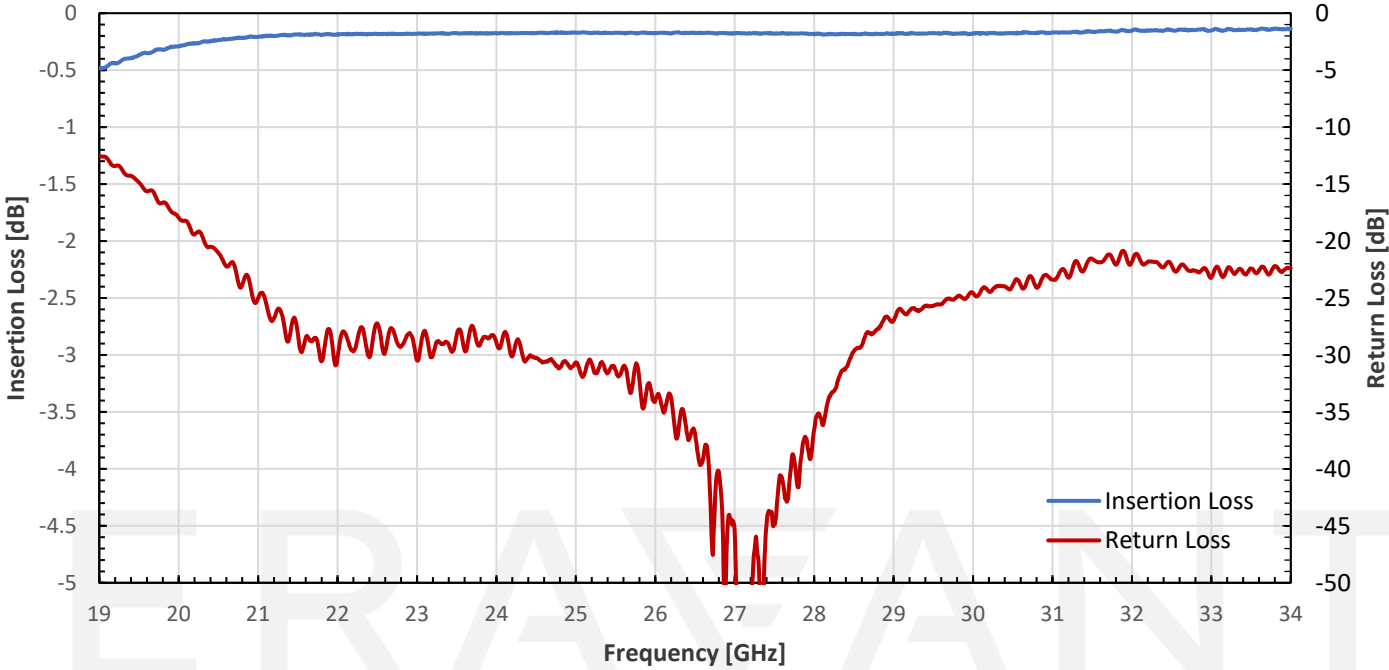

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

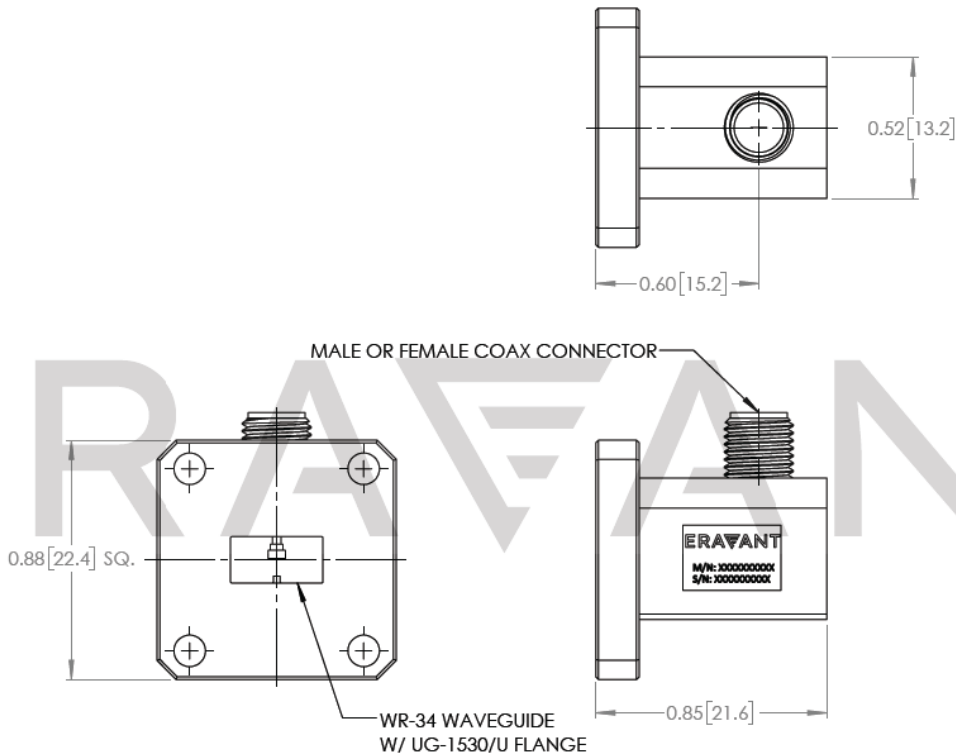

**NOTE:**

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- Any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied:  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE