



WR-34 Band Direct Reading Attenuator

Description:

Model STA-60-34-D1 is a direct reading, rotary vane attenuator for use in millimeter wave systems across the standard WR-34 frequency range of 22 to 33 GHz. The attenuator has a large scale dial which indicates the attenuation value directly. The attenuator is an ideal piece of equipment in waveguide systems where a broad direct reading of attenuation is required. The attenuator exhibits 0.5 dB typical insertion loss and up to 60 dB maximum attenuation. The accuracy of the attenuator is 0.1 dB or 3% of the reading, whichever is larger, up to 40 dB, 5% up to 50 dB, and “for reference only” above 50 dB.



Features:

- Full Band Coverage
- High Attenuation Accuracy
- Large Scaled Dial

Applications:

- Test Lab
- Instrumentations
- Manual Test Set

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency Range	22 GHz		33 GHz
Insertion Loss		0.5 dB	
Attenuation Range	0 dB		60 dB
Attenuation Accuracy	0.1 dB or 3% of reading, whichever is larger, up to 40 dB		
Return Loss		20 dB	
Power Handling			500 mW
Specification Temperature		+25 °C	
Operating Temperature		+25 °C	

*This product is intended to be used in a controlled lab environment.

To ensure best possible accuracy and prevent unintended behavior, please operate the unit as close to +25 °C room temperature as possible.

Mechanical Specifications:


Item	Specification
Waveguide Ports	WR-34 Waveguide with UG-1530/U Flange
Reading	Large Scale Dial
Scale Increments	0.01 dB (0 to 0.1 dB); 0.05 dB (0.1 to 1.0 dB); 0.1 dB (1.0 to 10 dB) 0.02 dB (10 to 20 dB); 0.05 dB (20 to 30 dB); 1.0 dB (30 to 50 dB)
Insertion Length	9.40"
Flange Material	Brass
Finish	Gold Plated Waveguide Flange; Black Anodized Body
Weight	2.4 lbs.
Outline	TA-D3-M1






WR-34 Band Direct Reading Attenuator

Typical Attenuation vs Frequency

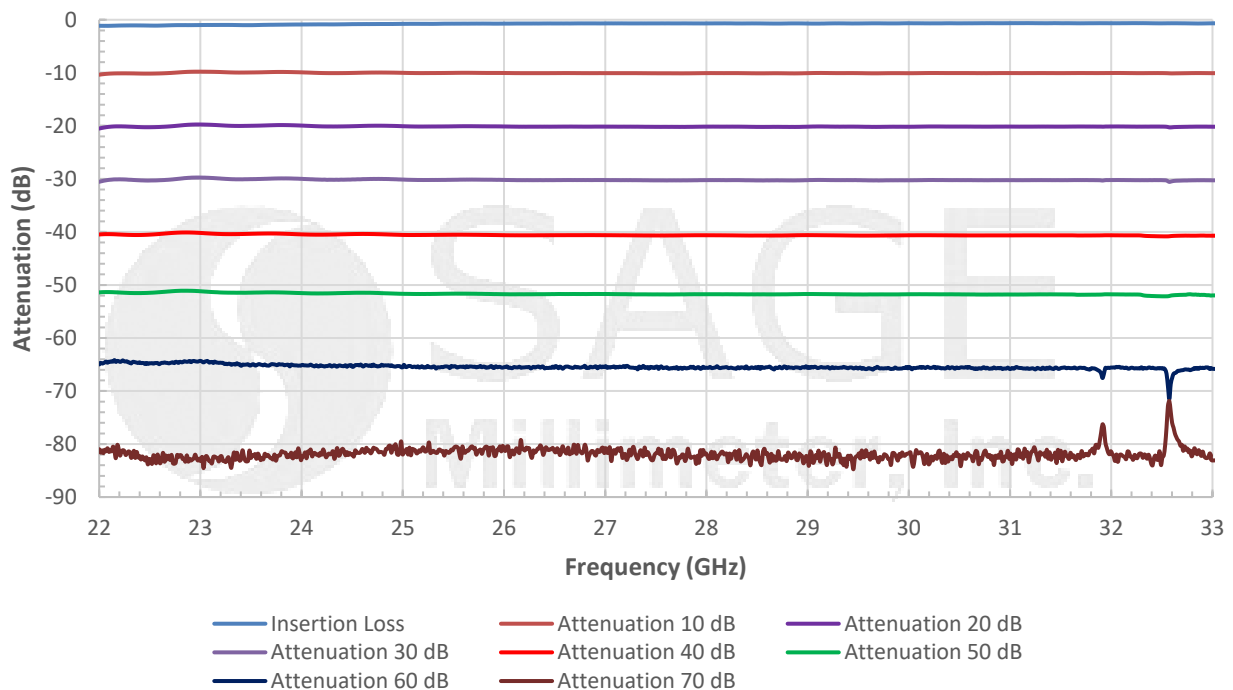

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

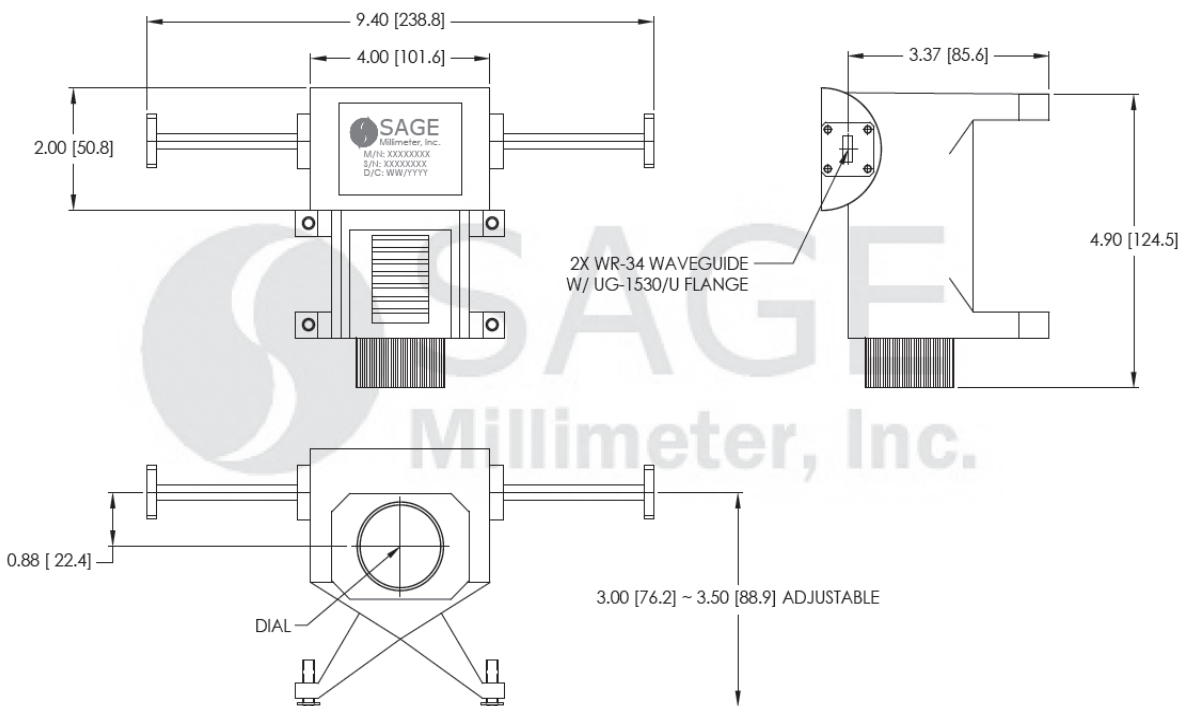

www.eravant.com | 501 Amapola Ave, Torrance, CA 90501
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com



WR-34 Band Direct Reading Attenuator

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All calibration and testing are performed at +25 °C room temperature.
- Calibration accuracy is 0.1 dB or 3% of the reading, whichever is greater, for attenuation ranges up to 40 dB, 5% up to 50 dB, and “for reference only” above 50 dB.
- **This product is intended to be used in a controlled lab environment. To ensure best possible accuracy and prevent unintended behavior, please operate the unit as close to +25 °C room temperature as possible.**
- The attenuation flatness is $\pm 2\%$ or ± 0.5 dB of the indicated value, whichever is greater, for the frequency band up to 30 dB.
- The phase shift value does change while varying the attenuation.
- Every twelve-months, a scheduled recalibration is recommended.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

