



Compact Benchtop Amplifier, 50 to 75 GHz, 25 dB Gain, +16 dBm P_{SAT}

Description:

Model STB-5037532512-1515-S1-C is a compact benchtop amplifier with a typical small signal gain of 25 dB and a nominal P_{1dB} of +12 dBm and +16 dBm P_{SAT} across the frequency range of 50 to 75 GHz, respectively. The input required to saturate the amplifier is 0 dBm typically. An AC to DC power adapter is provided so that the power supply required is a single phase AC voltage in the range of 100 to 240 V_{AC}, which can be supplied by a wall outlet or lab benches. The fan helps to keep the amplifier working around room temperature. The input and output ports are WR-15 waveguides with standard UG-385/U anti-cocking flanges.



Features:

- Full Waveguide Band Coverage
- High Gain
- High Output Power

Applications:

- IEEE 802.11ab WiGig
- Bench Top Power Amplification
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	50 GHz		75 GHz
Gain		25 dB	
P _{1dB}		+12 dBm	
P _{sat}		+16 dBm	
P _{in}		0 dBm	+15 dBm
Noise Figure		8 dB	
Port Return Loss		10 dB	
Power Supply (AC Adapter Provided)	100 V _{AC}		240 V _{AC}
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:


Item	Specification
RF Ports	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
DC Bias	2.5 mm DC Jack (AC-to-DC power converter included)
Enclosure Material	Extruded Aluminum
Finish	Various
Weight	1.5 lbs
Size	2.36" (W) x 2.36" (L) x 4.10" (H)
Outline	TB-SV-A-C




www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com

Compact Benchtop Amplifier, 50 to 75 GHz, 25 dB Gain, +16 dBm P_{SAT}

Typical Gain and Return Loss vs. Frequency

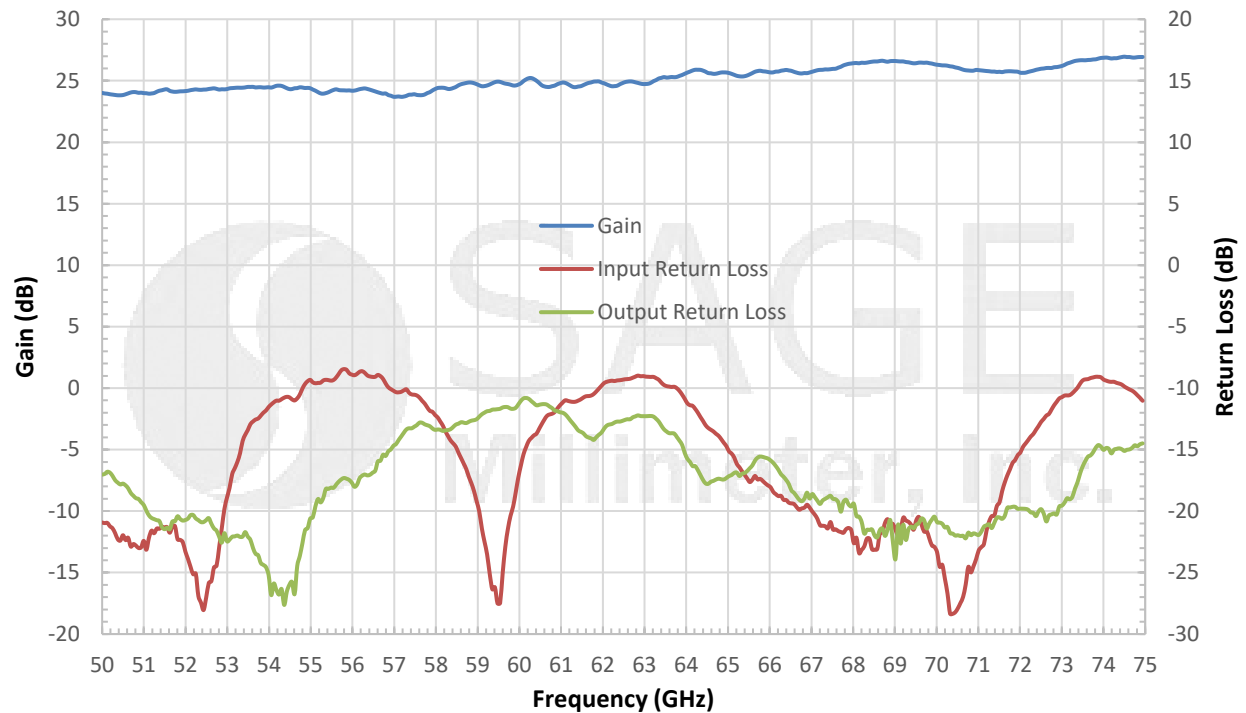


Typical Output Power vs. Frequency

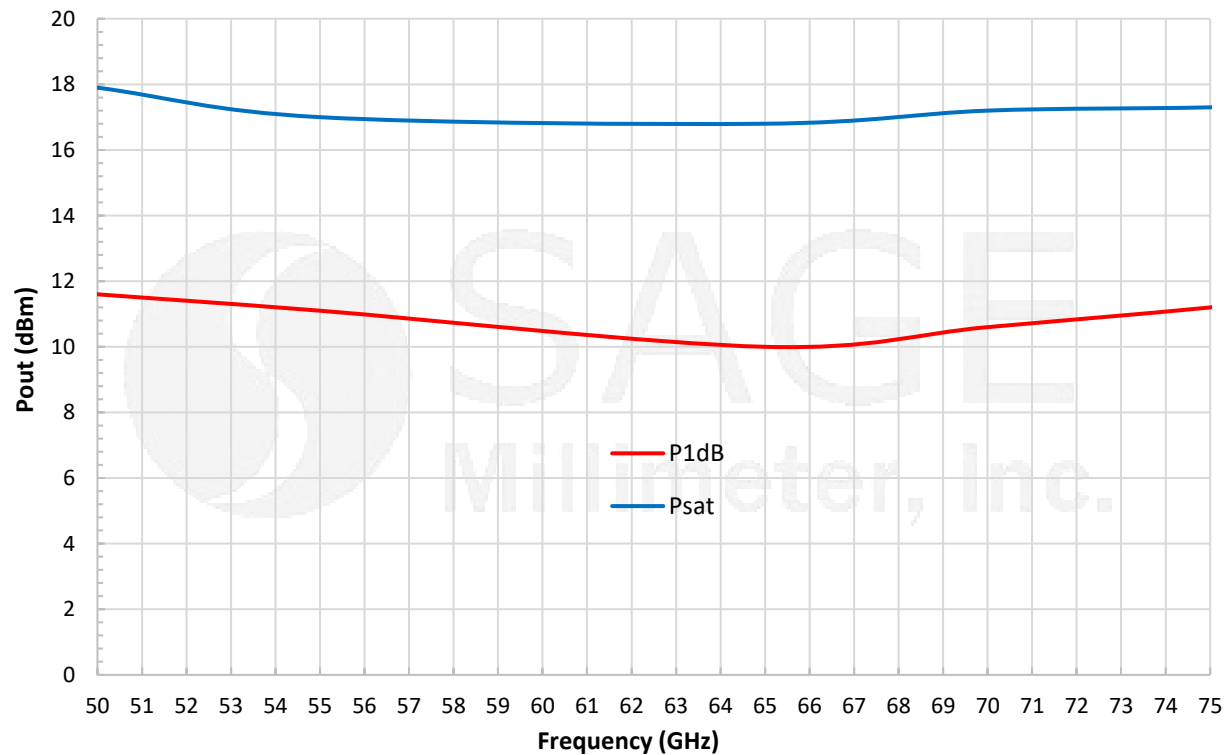



Compact Benchtop Amplifier, 50 to 75 GHz, 25 dB Gain, +16 dBm P_{SAT}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

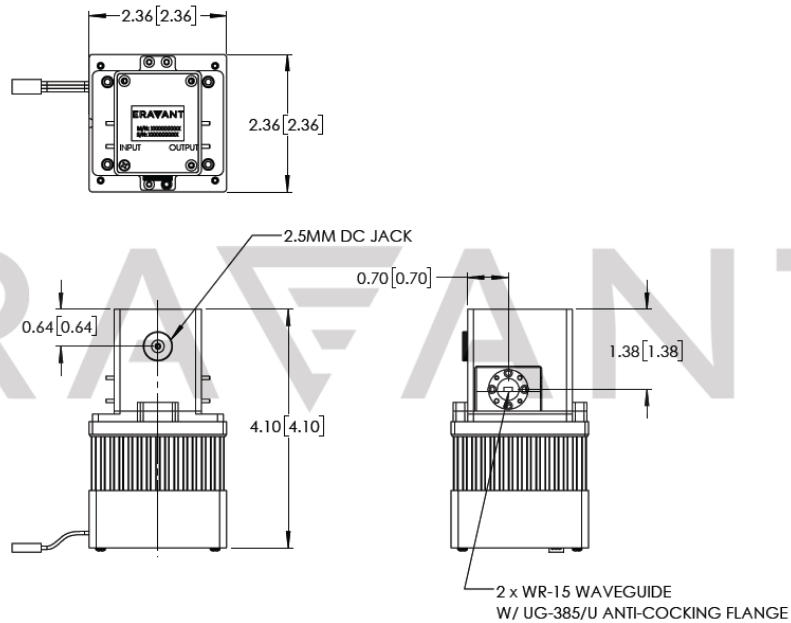

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- AC-to-DC power adapter with cord is included.
- Other mechanical configurations are available under different model numbers.
- Eravant, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.

