

F-Band Waveguide Directional Coupler, 10 dB

SWD-1030H-08-SB is an F band, three-port waveguide directional coupler that delivers a 10 dB nominal coupling level and 25 dB minimum directivity across the full waveguide band from 90 to 140 GHz. The three-port coupler uses a traditional multi-hole and split block design to achieve a flat coupling level, high directivity, and low insertion loss. The interfaces of the coupler are WR-08 waveguides with UG-387/U-M flanges. Custom coupling levels are available under different model numbers.




Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	90 GHz		140 GHz
Insertion Loss*		2.5 dB	
Coupling*		10 dB	
Directivity*	25 dB		
Return Loss		20 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

*The definition of the insertion loss, coupling and directivity is shown as following. The required termination on the waveguide port is 30 dB or better for accurate measurement.

*Performance may be reduced at band edges.

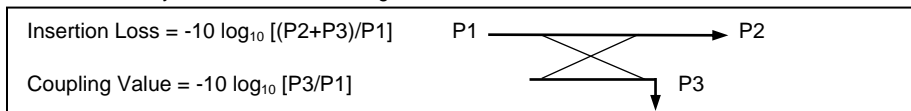

Mechanical Specifications:

Item	Specification
Waveguide Port	WR-08 Waveguide with UG-387/U-M Flange
Material	Brass
Finish	Gold Plated
Weight	8 Oz
Outline	WD-SB-F

ECCN

EAR99

FEATURES

- Full Band Operation
- Low Insertion Loss
- High Directivity
- Flat Coupling Level Across the Band

APPLICATIONS


- Test Labs
- Instrumentations
- Sub-assemblies

SUPPLEMENTAL DETAILS




SWD-1030H-08-SB-WP

Typical Performance vs. Frequency

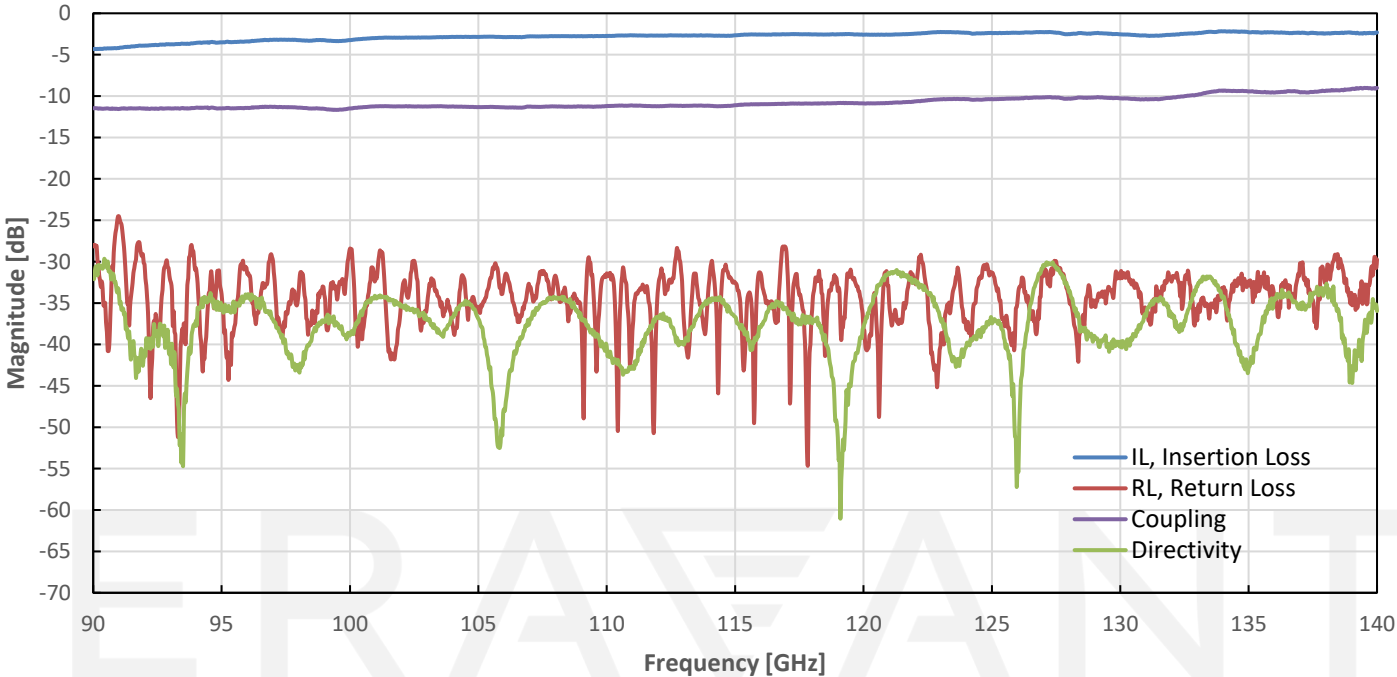

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

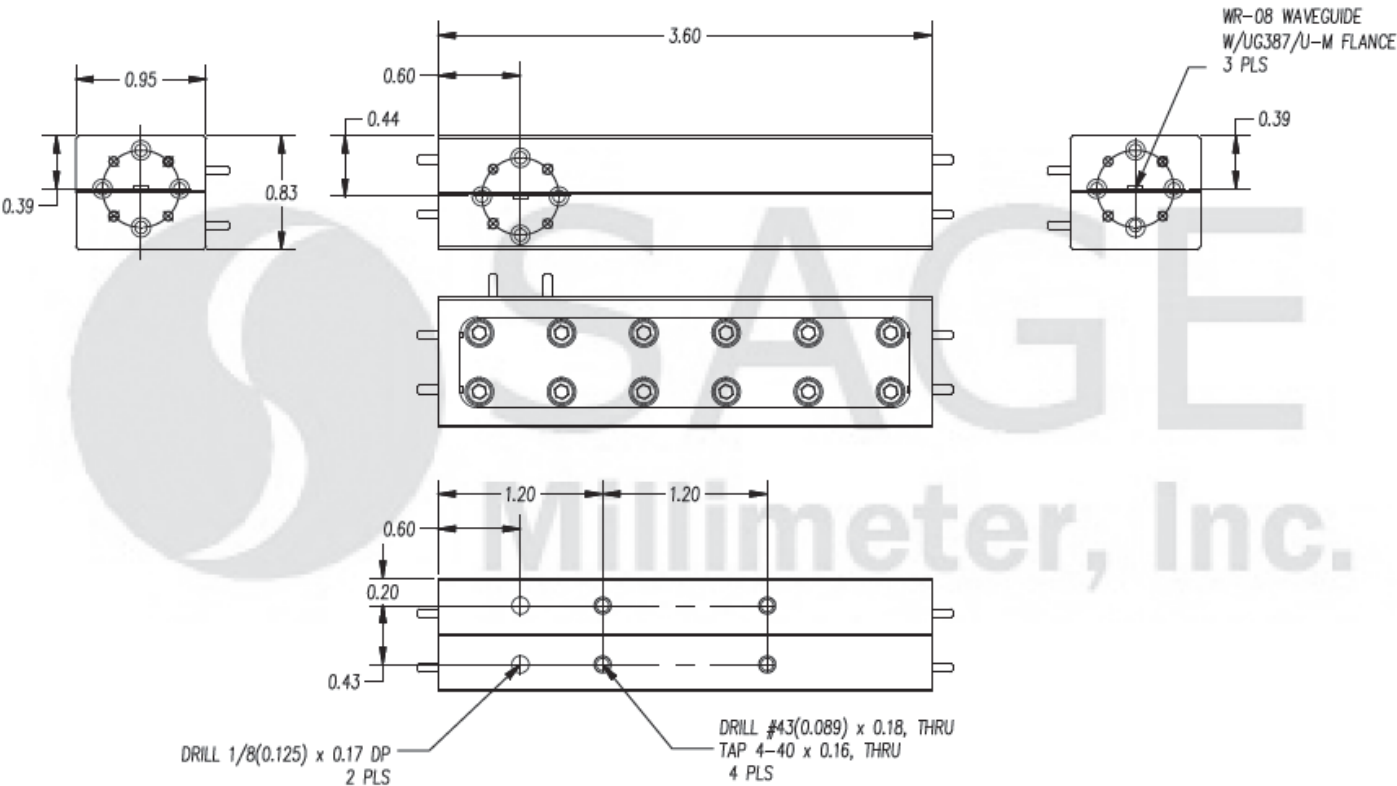

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE