

STC-11417400-06-C1

D-Band Down-Converter, 110 to 170 GHz

STC-11417400-06-C1 is a D-Band down-converter that converts millimeterwave signals from the frequency range of 110 to 170 GHz to the baseband at 5 to 65 GHz. The down-converter has a built-in phase locked oscillator (PLO), which is externally referenced at 10 MHz. The down converter also integrates a SPDT switch at the RF input for bypassing in order to monitor the receiving signal level. The switch is controlled by TTL signal and the bypassing “on” is at TTL “Low.” The bypassing loss is 6 dB typical. The RF ports for the downconverter is WR-06 waveguides with UG-387/U-M anti-cocking flange. The IF output is a 1.85 mm female connector and PLO reference signal input connector is an SMA (F) connector. A wall mount AC adapter is included for AC powering.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Input Frequency	110 GHz		170 GHz
IF Frequency Output	5 GHz		65 GHz
Conversion Gain		0 dB	
Combined Harmonic Power		-70 dBm	-65 dBm
Spurious		-40 dBc	-35 dBc
Noise Figure		16 dB	
Bypass Insertion Loss		6 dB	
Bypass “ON”	TTL “Low”		
Converter Mode	TTL “High” or No Input		
TTL Low	0 V _{DC}		+0.8 V _{DC}
TTL High	+2.7 V _{DC}		+5.0 V _{DC}
Switch Isolation	15 dB	20 dB	
RF Input P _{1dB}		-25 dBm	
Internal LO Multiplication		x8	
RF Damage Level (Bypassing)			+10 dBm
RF Damage Level (Converting)			-10 dBm
Reference Frequency		10 MHz	
Reference Input Power	-5 dBm	+3 dBm	
Reference Damage Level			+10 dBm
Port Return Loss		10 dB	
Power Supply (AC Adapter Provided)	100 V _{AC}		240 V _{AC}
Specification Temperature		+25 °C	
Operating Temperature	+0 °C		+50 °C

ECCN

3A001.b.4

FEATURES

- Full Waveguide Band Coverage
- High IF Frequency Range

APPLICATIONS

- Test Lab
- Instrumentations
- Auto Test Set


SUPPLEMENTAL DETAILS



Mechanical Specifications:

Item	Specification
RF Input/Output Ports	WR-06 Waveguide with UG-387/U-M Anti-Cocking Flange
10 MHz Reference Port	SMA (F)
IF Port	1.85 mm (F)
Bias Port	2.5 mm DC Jack (AC-to-DC power converter included)
Finish	Black Anodized
Weight	4.4 lbs
Size	10.00" (L) x 6.00" (W) x 1.90" (H)
Outline	TC-D-A-2


Block Diagram:

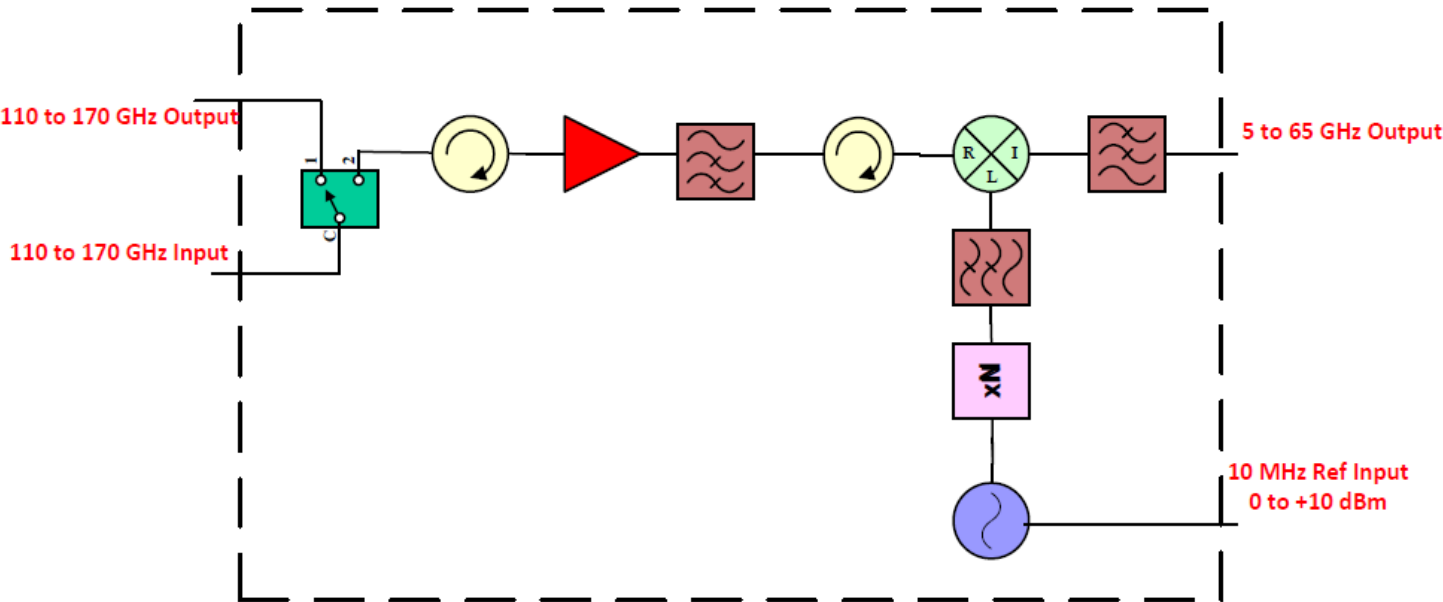

ERAVANT

MAKING MILLIMETERWAVE ACCESSIBLE

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

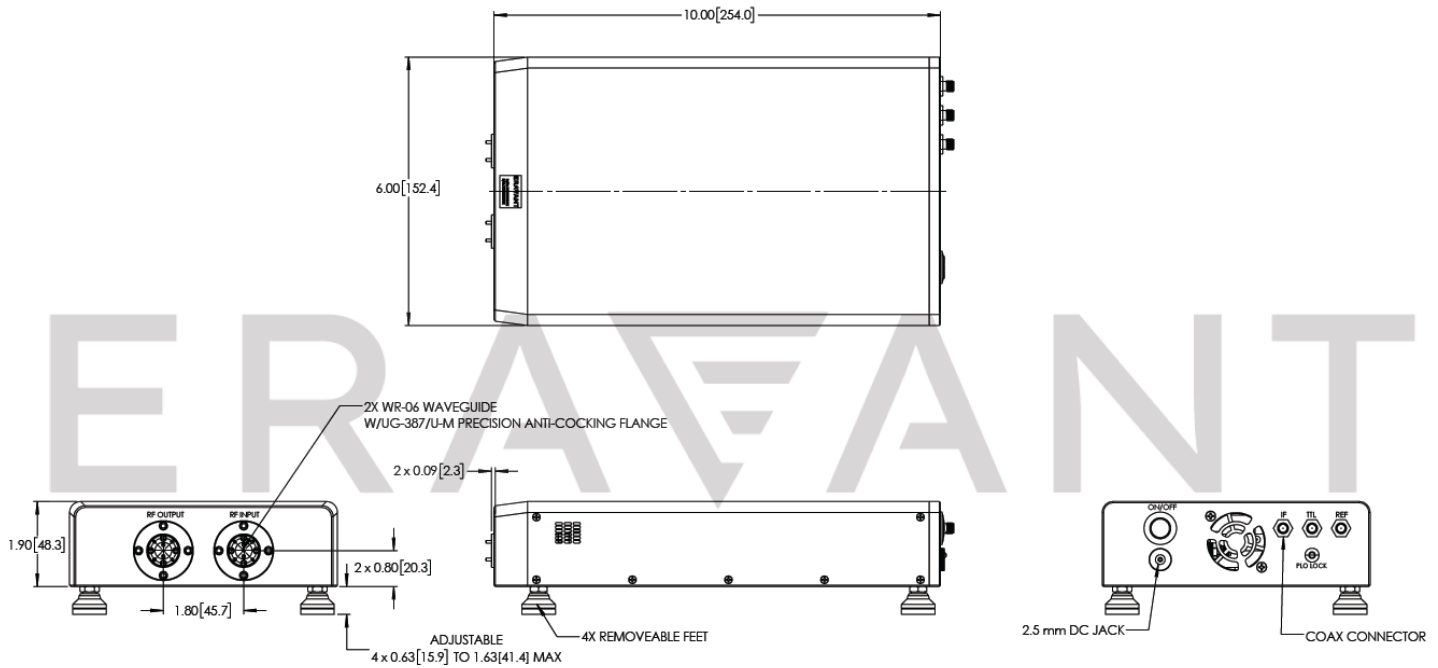

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- The wall mount AC power adapter is included. The unit can be AC powered in the range of 100 to 240 V_{AC}.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings of the device will damage the device.
- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended.