

STC-20-08-S1

F-Band Full Waveguide Band Down-Converter

STC-20-08-S1 is an F-Band down-converter that converts millimeterwave signals from a frequency range of 90 to 140 GHz to the baseband at 10 MHz to 1.6 GHz. The down-converter requires 11.25 to 17.5 GHz at +3 dBm input power, which can be obtained from a standard 20 GHz synthesizer, such as **Eravant models STL-SG-022203-S1** or **SOT-02220313200-SF-B6**. The down-converter has low harmonic levels and excellent gain flatness, making it a good candidate to extend low frequency test equipment for millimeterwave testing purposes.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Input Frequency	90 GHz		140 GHz
IF Output Frequency	10 MHz	1 GHz	1.6 GHz
LO Input Frequency	11.25 GHz		17.5 GHz
LO Power		+3 dBm	+20 dBm
Conversion Gain		20 dB	
Harmonic Suppression		20 dBc	
Input P1dB		-10 dBm	
RF Input Power Damage Level			+13 dBm
Power Supply (AC Adapter Provided)	100 V _{AC}		240 V _{AC}
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:

Item	Specification
RF Ports	WR-08 Waveguide with UG-387/U-M Precision Anti-Cocking Flange
LO Port	SMA (F)
IF Port	SMA (F)
DC Bias Port	2.5 mm DC Jack (AC-to-DC power converter included)
DC Bias Switch	On-Off Rocker Latching with Indicator Light
Enclosure Material	Black Anodized Aluminum
Weight	2.3 lbs
Size	4.89" (W) x 5.00" (L) x 1.90" (H)
Outline	TC-F-A

ECCN

EAR99

FEATURES

- Full Band Coverage

APPLICATIONS

- Test Lab
- Instrumentations
- Auto Test Set

RECOMMENDED PAIRINGS

- [STL-SG-022203-S1](#)
- [SOT-02220313200-SF-B6](#)

SUPPLEMENTAL DETAILS




STC-20-08-S1

Accessories Included:

Item	Specification	Quantity
Proxi-Flange™ Contactless Flange, 1.0" Long	STQ-WG-08010-FB-CF	1
Proxi-Flange™ Contactless Flange, 2.5" Long	STQ-WG-08025-FB-CF	1
Waveguide Screwdriver, 3/32 Hex Head	SWH-332-DS	1
SMA Connector Torque Wrench	SCH-08008-S1	1


Block Diagram:

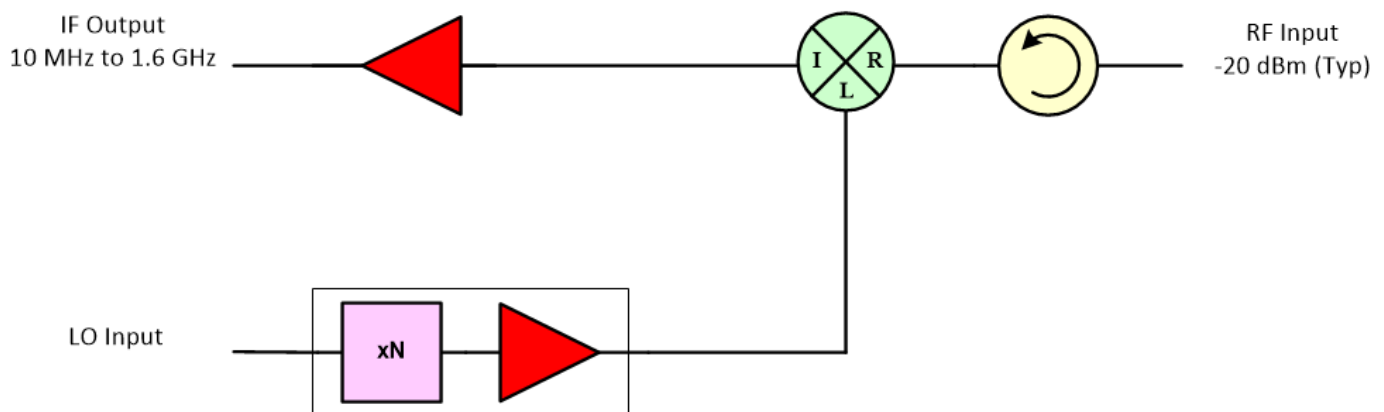

MAKING MILLIMETERWAVE ACCESSIBLE


Typical Conversion Gain vs. RF Frequency

IF: 1 GHz, RF: -20 dBm

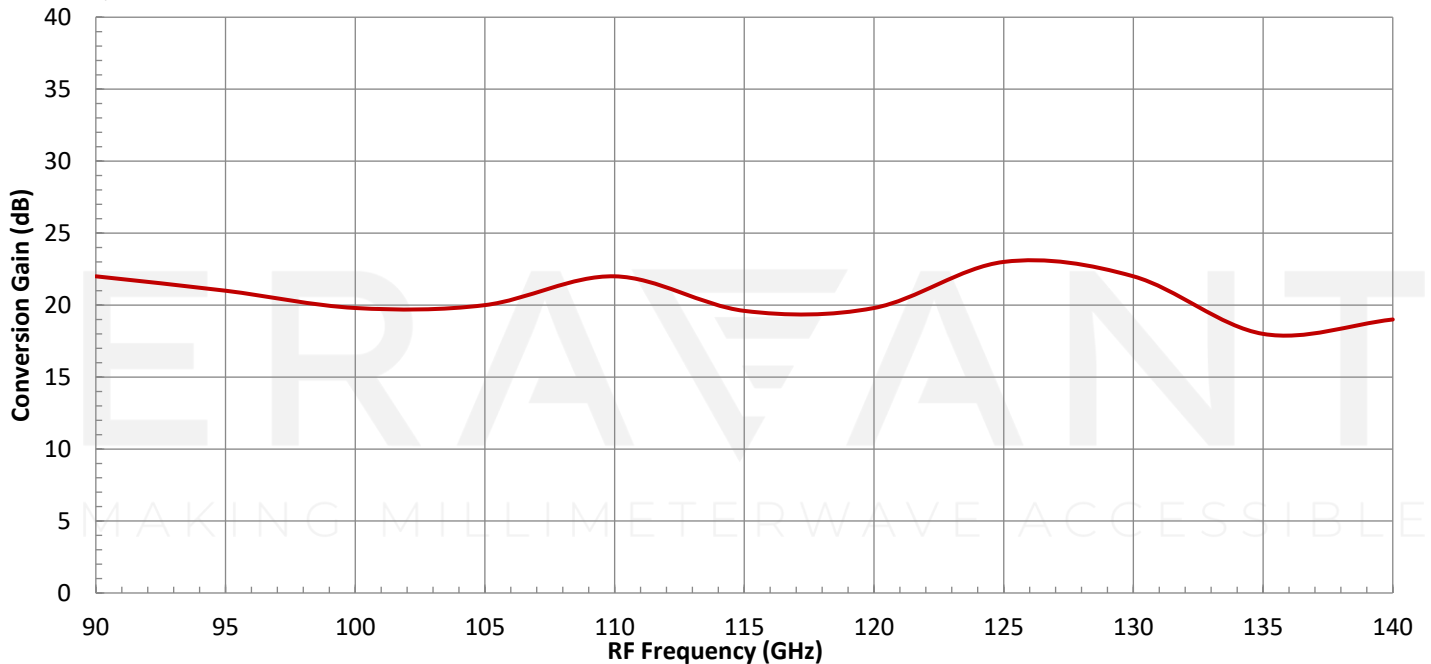

STC-20-08-S1

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

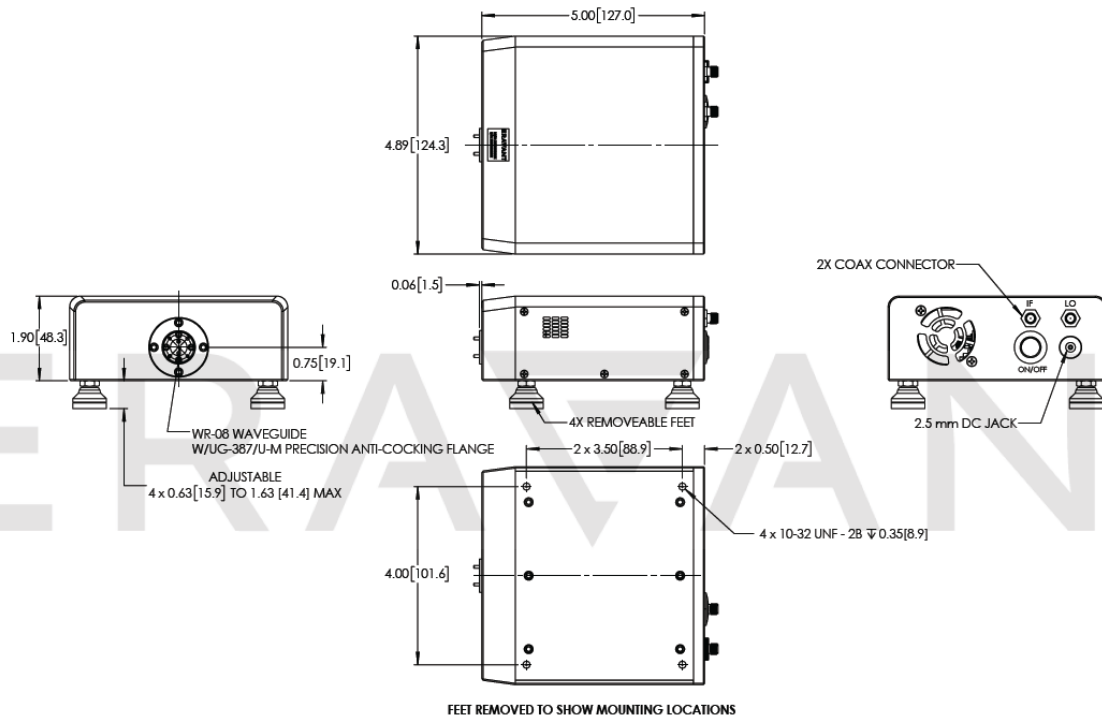

MAKING MILLIMETERWAVE ACCESSIBLE

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings of the device will damage the device.
- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model **SCH-08008-S1** is highly recommended.

MAKING MILLIMETERWAVE ACCESSIBLE