

SWD-4040H-06-BB

D-Band Waveguide Bi-Directional Coupler, 40 dB


SWD-4040H-06-BB is a D band, four-port waveguide bi-directional coupler that delivers a 40 dB nominal coupling level and 40 dB nominal directivity across the full waveguide band from 110 to 170 GHz. The three-port coupler uses a traditional multi-hole and split block design to achieve a flat coupling level, high directivity, and low insertion loss. The interfaces of the coupler are WR-06 waveguides with UG-387/UM anti-cocking flanges. Custom coupling levels are available under different model numbers.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	110 GHz		170 GHz
Insertion Loss*		3 dB	
Coupling*		40 dB	
Directivity*		40 dB	
Return Loss		20 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

*The definition of the insertion loss, coupling and directivity is shown as following. The required termination on the waveguide port is 30 dB or better for accurate measurement.

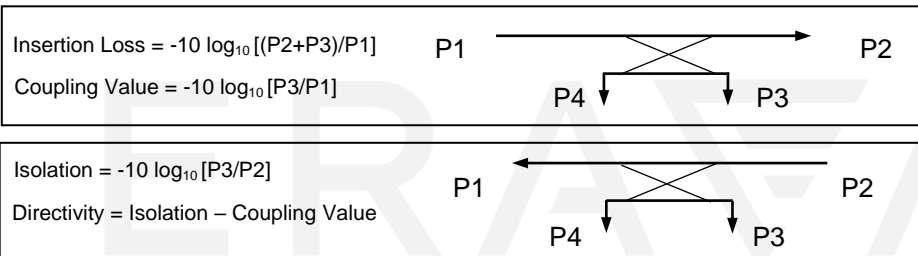

ECCN

EAR99

FEATURES

- Full Band Coverage
- Low Insertion Loss
- High Directivity

APPLICATIONS

- Test Labs
- Instrumentation
- Sub-assemblies

SUPPLEMENTAL DETAILS




SWD-4040H-06-BB

Mechanical Specifications:

Item	Specification
Through Ports	WR-06 Waveguide with UG-387/U-M Anti-Cocking Flange
Coupled Ports	WR-06 Waveguide with UG-387/U-M Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	7.7 Oz
Outline	WD-BB-D-A

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

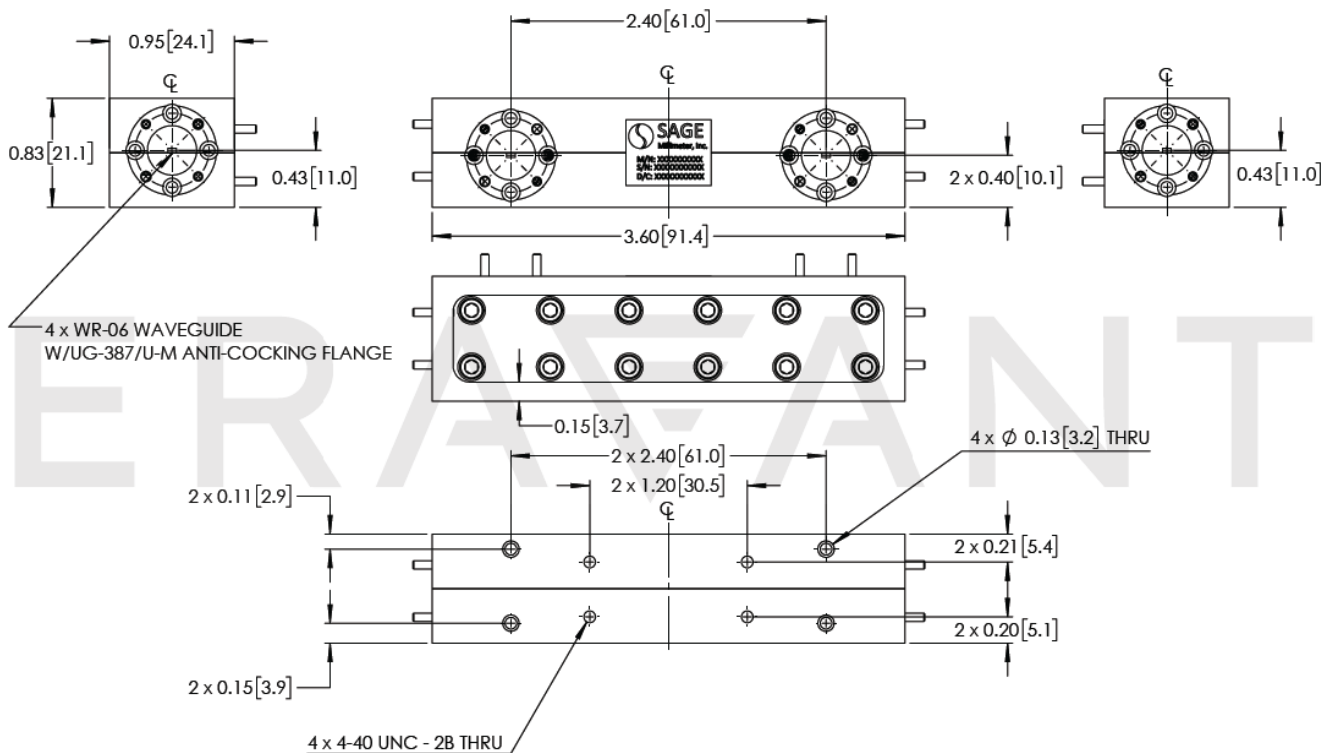

NOTE:

- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.