

SWF-10410440-08-H1

Waveguide Highpass Filter, F Band, 104 GHz and Higher

SWF-10410440-08-H1 is an F band waveguide highpass filter with a passband frequency of 104 GHz and higher and a rejection frequency from DC to 100 GHz. The filter provides a nominal insertion loss of 2.5 dB across its passband with a low ripple and a typical rejection of 40 dB. Since the low end cutoff frequency can be changed by modifying the design, custom designs can be offered under different model numbers.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency Range	104 GHz		>200 GHz
Passband Insertion Loss		2.5 dB	
Rejection Frequency	DC		100 GHz
Rejection		40 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Waveguide	WR-08 Waveguide with UG-387/U-M Flange
Material	Aluminum
Finish	Gold Plated
Weight	0.3 Oz
Outline	WF-HF

ECCN

EAR99

FEATURES

- Low Cost
- Low Insertion Loss
- High Rejection

APPLICATIONS


- Communication Systems
- Radar Systems
- Sub-assemblies

SUPPLEMENTAL DETAILS




SWF-10410440-08-H1

Typical Rejection vs. Frequency

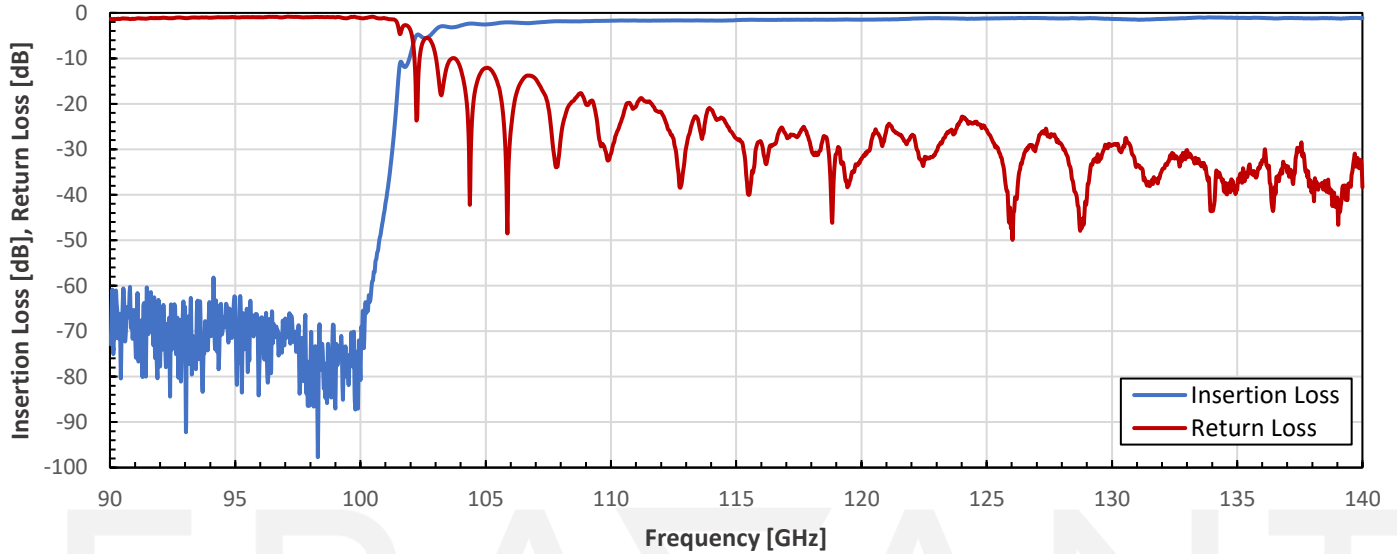

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

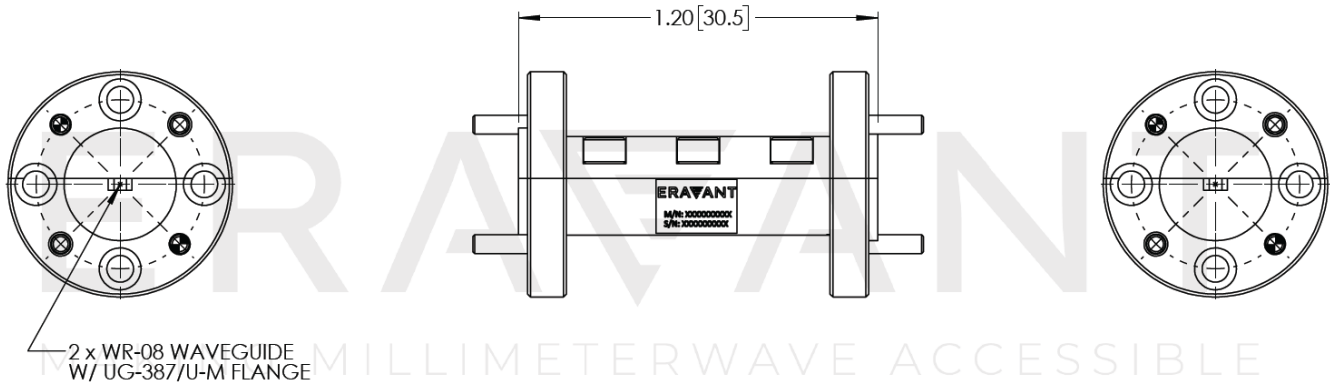

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.