

SWF-27310340-28-B1

Waveguide Bandpass Filter, Ka Band, 22.0 to 32.0 GHz

SWF-27310340-28-B1 is a Ka band waveguide bandpass filter with a passband frequency from 22 to 32 GHz and a rejection frequencies of 1 kHz to 18 GHz and 37 to 75 GHz, respectively. The filter provides a nominal insertion loss of 1.0 dB across its passband and a typical rejection of 40 dB. Since the high end cutoff frequency can be changed by modifying the design, custom designs can be offered under different model numbers.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	22.0 GHz		32.0 GHz
Passband Insertion Loss		1.0 dB	
Rejection Frequency, Low Side	1 kHz		18.0 GHz
Rejection Frequency, High Side	37.0 GHz		75.0 GHz
Rejection		40 dB	
Passband VSWR			1.5:1
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Waveguide	WR-28 Waveguide with UG-599/U Flange
Size	3.60" (L) X 0.75" (W) x 0.75" (H)
Material	Brass
Finish	Gold Plated
Weight	8.7 Oz
Outline	WF-LA-3.6

ECCN

EAR99

FEATURES

- Low Insertion Loss
- High Rejection

APPLICATIONS


- Test Labs
- Instrumentations
- Sub-assemblies

SUPPLEMENTAL DETAILS




SWF-27310340-28-B1

Simulated Data:

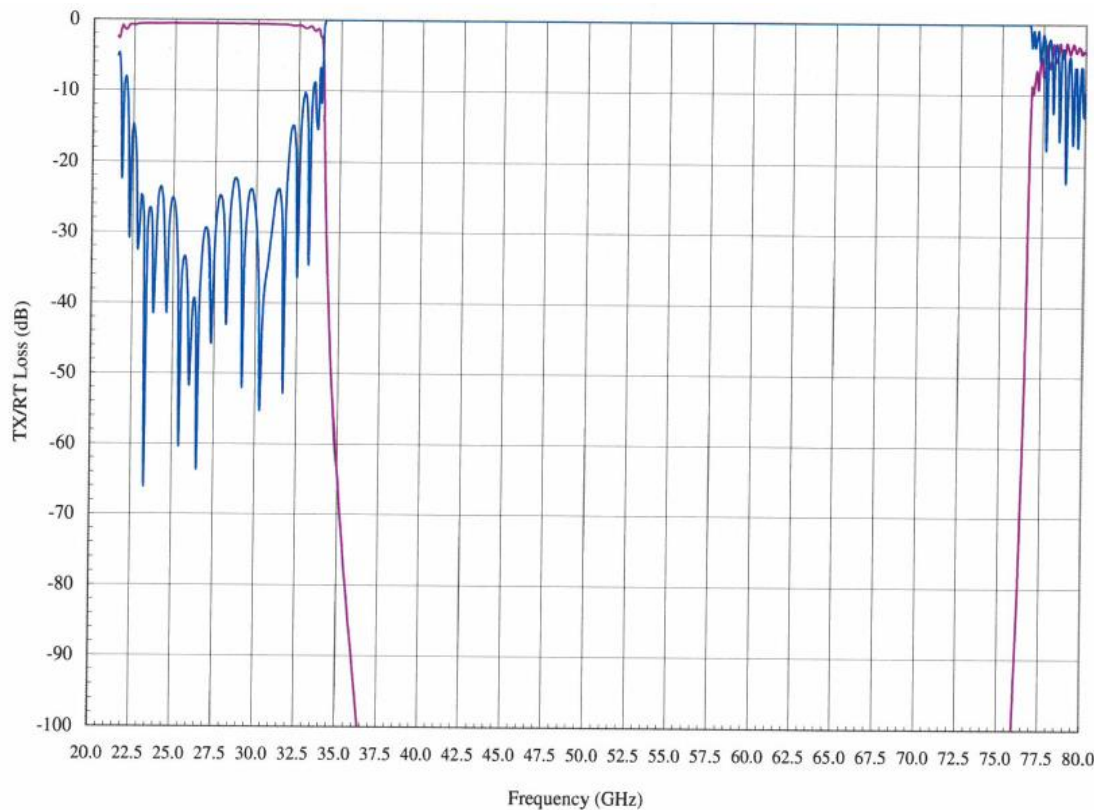

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

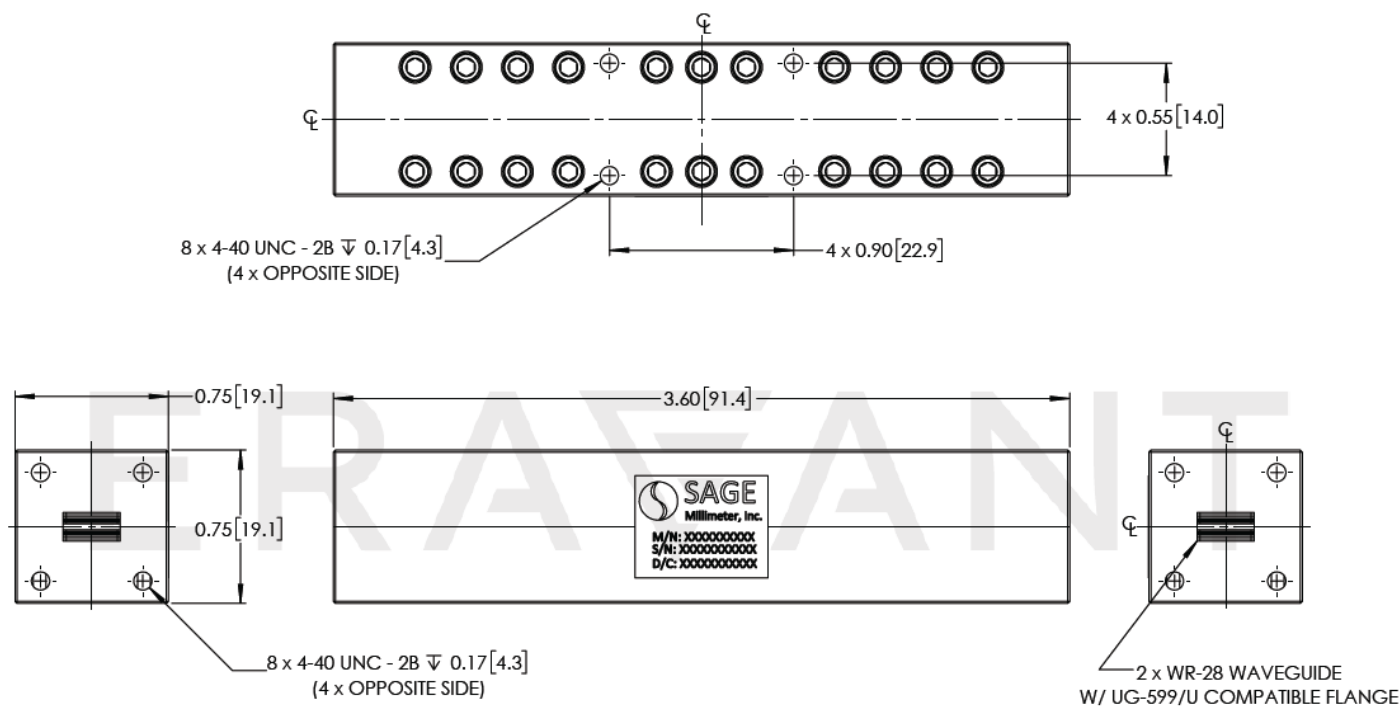

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE