

## SWF-28410340-03-B1

## Waveguide Bandpass Filter, WR-03 Band, 275 to 285 GHz

**SWF-28410340-03-B1** is an WR-03 waveguide bandpass filter with a passband frequency of 275 to 285 GHz and rejection frequencies from DC to 260 GHz and 316 to 330 GHz. The nominal insertion loss of the bandpass filter is 1.7 dB and the typical rejection is 40 dB. Since both low end and high end cut off frequencies can be selected by modifying the design, custom designs are available under different model numbers.



## Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency Range	275 GHz		285 GHz
Passband Insertion Loss		1.7 dB	
Rejection Frequency, Low Side	DC		260 GHz
Rejection Frequency, High Side	316 GHz		330 GHz
Rejection		40 dB	
Passband Return Loss		14 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

## Mechanical Specifications:

Item	Specification
Waveguide	WR-03 Waveguide with UG-387/U-M Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	1.1 Oz
Outline	WF-B03-A-0.5

## ECCN

EAR99

## FEATURES

- Low Cost
- Low Insertion Loss
- High Rejection


## APPLICATIONS

- Communication Systems
- Radar Systems
- Sub-assemblies


## SUPPLEMENTAL DETAILS



Typical Rejection vs. Frequency

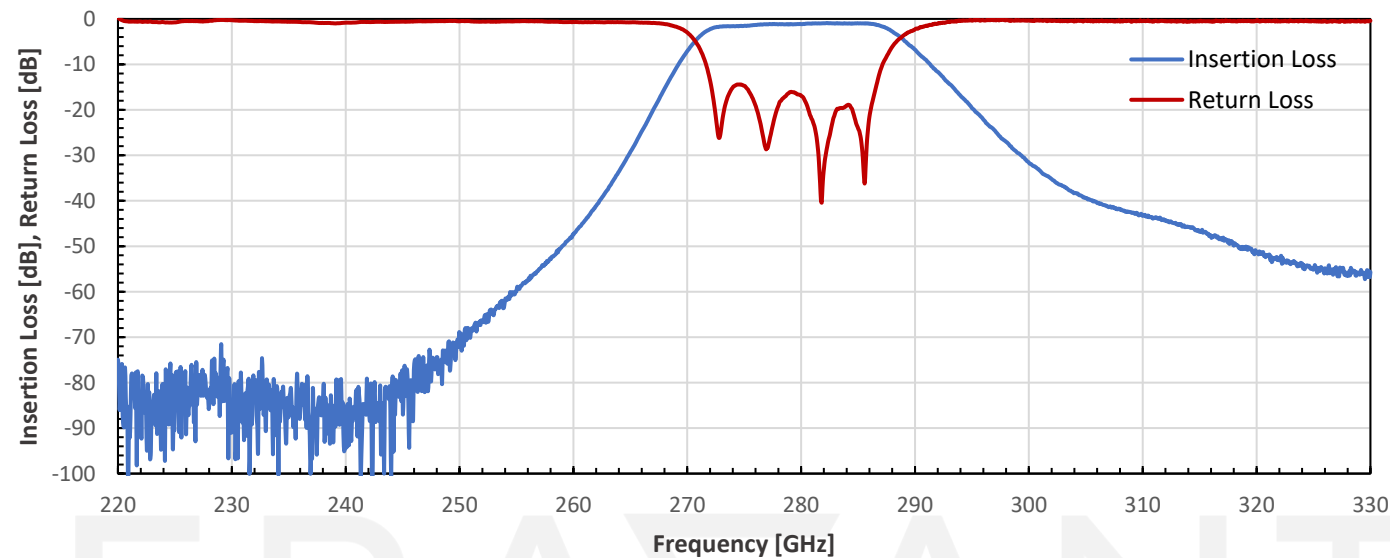

**Mechanical Outline:**  
Unless otherwise specified, all dimensions are in inches [millimeters]

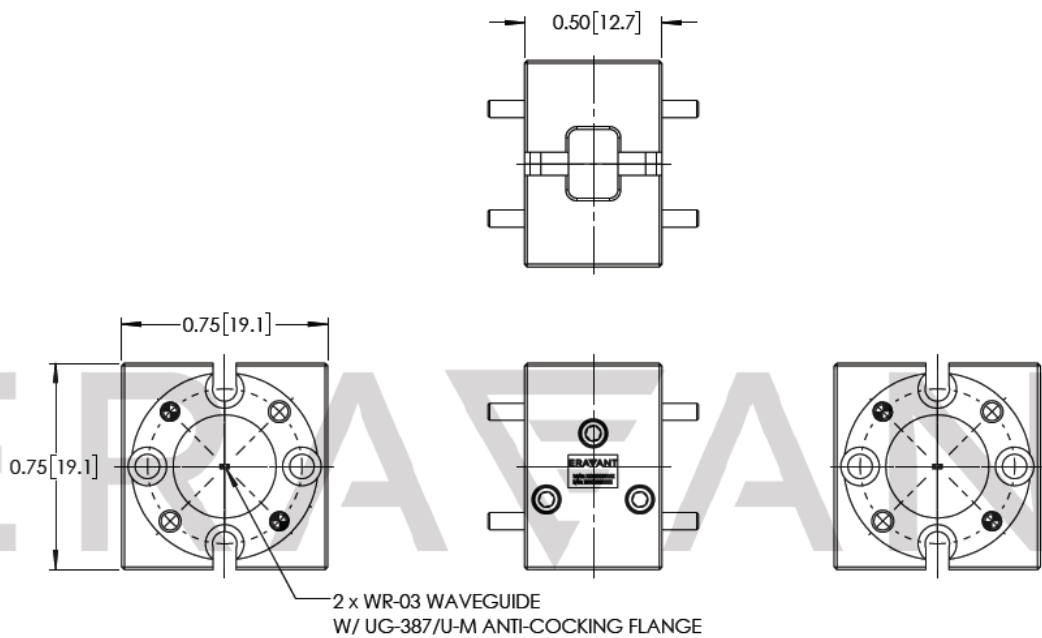

**NOTE:**

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE