

WR-04 Faraday Isolator

Description:

Model STF-04-S1 is a full band Faraday isolator that operates from 170 to 260 GHz. The Faraday isolator is constructed with a longitudinal, magnetized ferrite rod that causes a Faraday rotation of the incoming RF signal. The Faraday isolator offers 30 dB typical isolation and 6.0 dB nominal insertion loss. The return loss of the isolator is 15 dB. The input and output ports are WR-04 waveguides with UG-387/U-M flanges.



Features:

- Full Waveguide Band Operation
- Moderate Insertion Loss
- High Isolation
- Instrumentation Grade

Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	170 GHz		260 GHz
Insertion Loss		6 dB	
Isolation		30 dB	
Return Loss		15 dB	
Power Handling		0.1 W (CW)	0.2 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


Mechanical Specifications:

Item	Specification
RF Input and Output Ports	WR-04 Waveguide with UG-387/U-M Flange
Waveguide Flange Material	Brass
Waveguide Flange Finish	Gold Plated
Cover Material	Aluminum
Cover Finish	Black Anodized
Weight	1.8 Oz
Insertion Length	2.27"
Outline	TF-S04




WR-04 Faraday Isolator

Typical Measured Performance vs Frequency

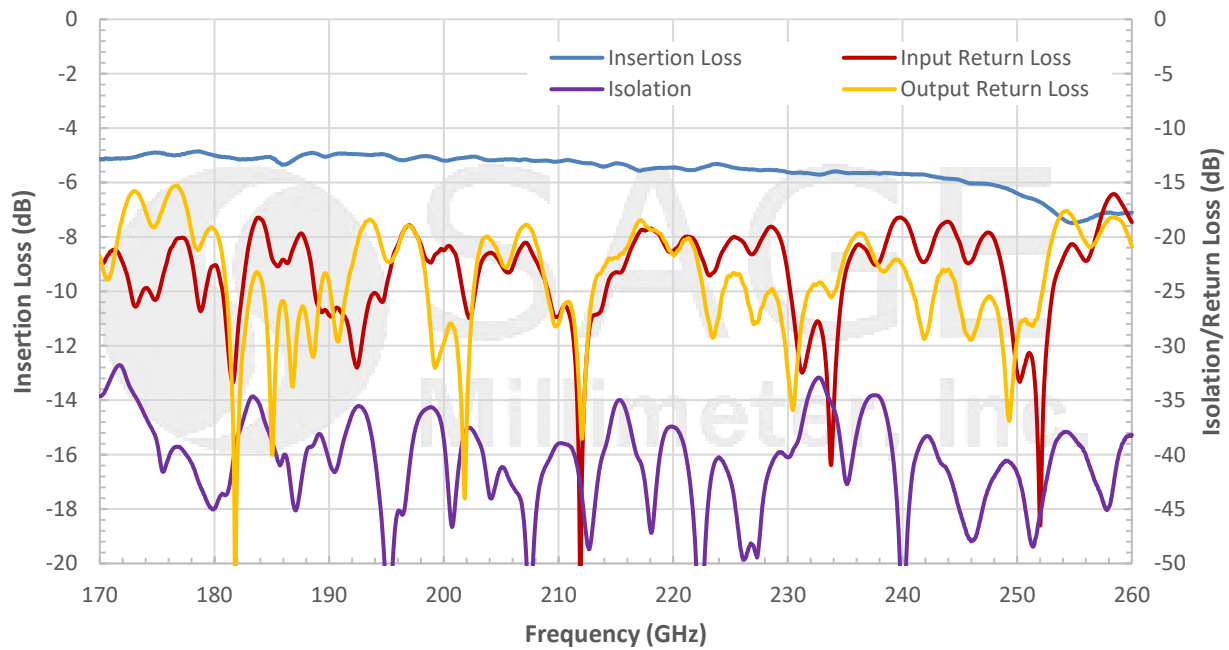

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

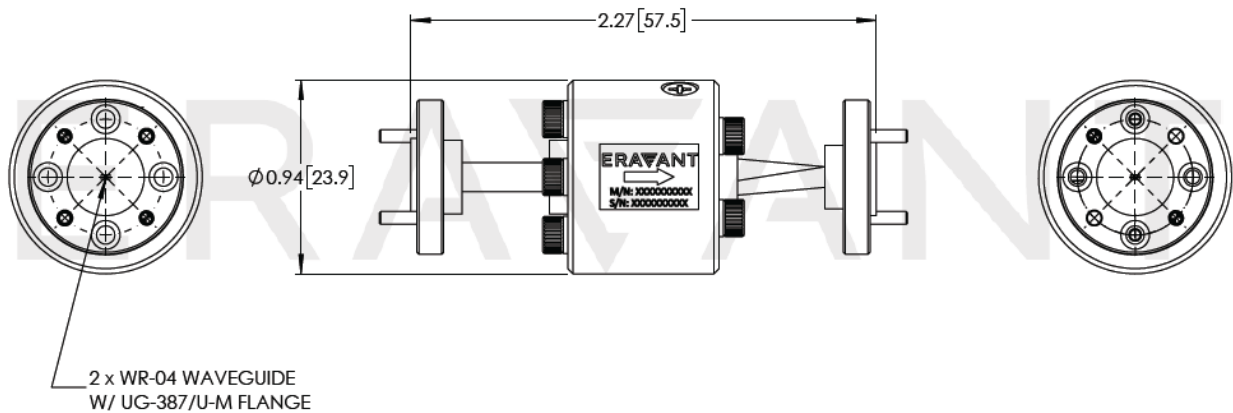

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings will damage the device.
- The device is sensitive to magnetic fields. Always keep magnetic fields 6 inches away.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.



www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com