

## SWF-56312330-15-B1

### Waveguide Bandpass Filter, V Band, 50.2 to 62 GHz

**SWF-56312330-15-B1** is a V band waveguide bandpass filter with a passband frequency of 50.2 to 62 GHz and rejection frequencies from DC to 49 GHz and 63 to 67 GHz. The nominal insertion loss of the bandpass filter is 3.5 dB and the typical rejection is 30 dB. Since both low end and high end cut off frequencies can be selected by modifying the design, custom designs are available under different model numbers.



#### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	50.2 GHz		62 GHz
Passband Insertion Loss		3.5 dB	
Rejection Frequency, Low Side	DC		49 GHz
Rejection Frequency, High Side	63 GHz		67 GHz
Rejection		30 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

#### Mechanical Specifications:

Item	Specification
Waveguide Port	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WF-BV-A

#### ECCN

EAR99

#### FEATURES

- Low Cost
- Low Insertion Loss
- High Rejection

#### APPLICATIONS

- IEEE 802.11ad WiGig Systems
- Communication Systems
- Radar Systems
- Sub-assemblies


#### SUPPLEMENTAL DETAILS



SWF-56312330-15-B1

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters])

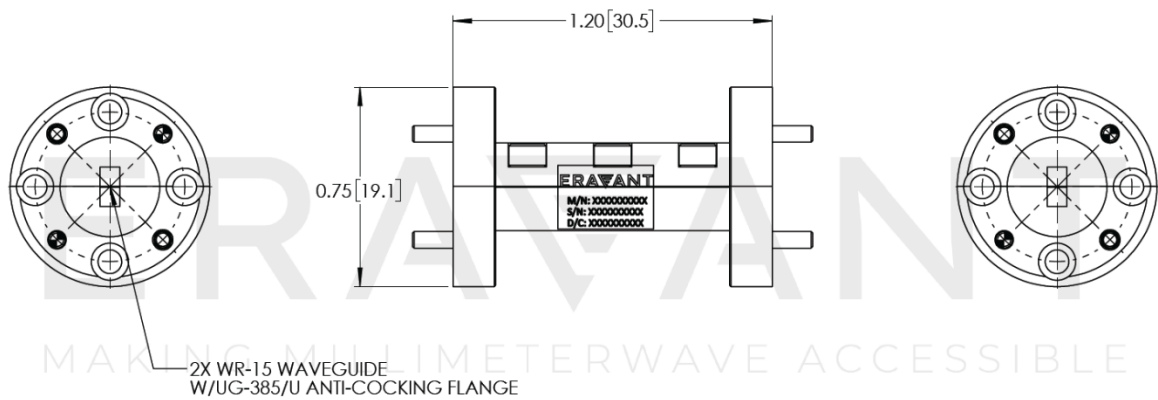

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.