



U Band Waveguide, Lowpass Filter, 36 to 60 GHz

Description:

Model SWF-60366340-19-L1 is an U band waveguide lowpass filter with a passband frequency from 36 to 60 GHz and a rejection frequency 68 to 120 GHz. Due to the waveguide cut off nature, the low side of the filter has rejection range of DC to 30 GHz. The filter provides a nominal insertion loss of 1.5 dB across its passband and a typical rejection of 40 dB. Since the high end cutoff frequency can be changed by modifying the design, custom designs can be offered under different model numbers.



Features:

- Low Insertion Loss
- High Rejection

Applications:

- IEEE 802.11ad WiGig Systems
- Test Labs
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	36 GHz		60 GHz
Passband Insertion Loss		1.5 dB	
Rejection Frequency, Low Side	DC		30 GHz
Rejection Frequency, High Side	68 GHz		120 GHz
Rejection		40 dB	
Passband Return Loss		14 dB	
Power Handling			100 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Waveguide	WR-19 Waveguide with UG-383/U-M Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	7.6 Oz
Size	2.00" (L) X 1.13" (W) X 1.13" (H)
Outline	WF-LU-A






U Band Waveguide, Lowpass Filter, 36 to 60 GHz

Typical Performance Vs Frequency

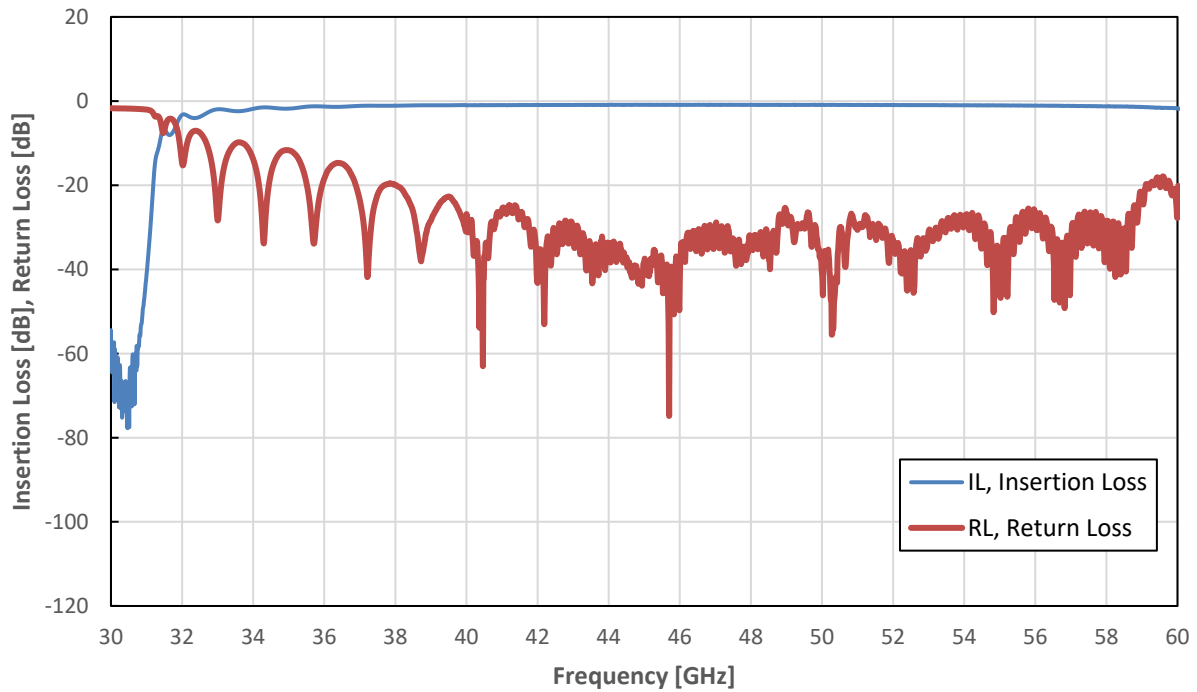


Typical Rejection Vs Frequency

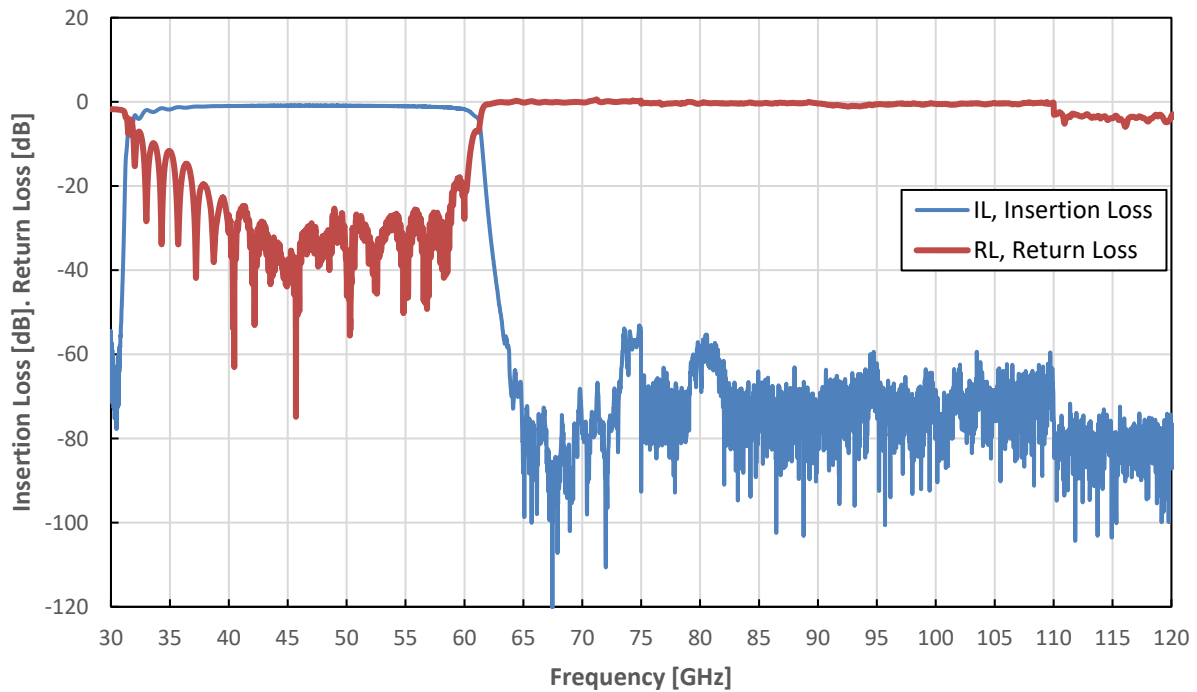



U Band Waveguide, Lowpass Filter, 36 to 60 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

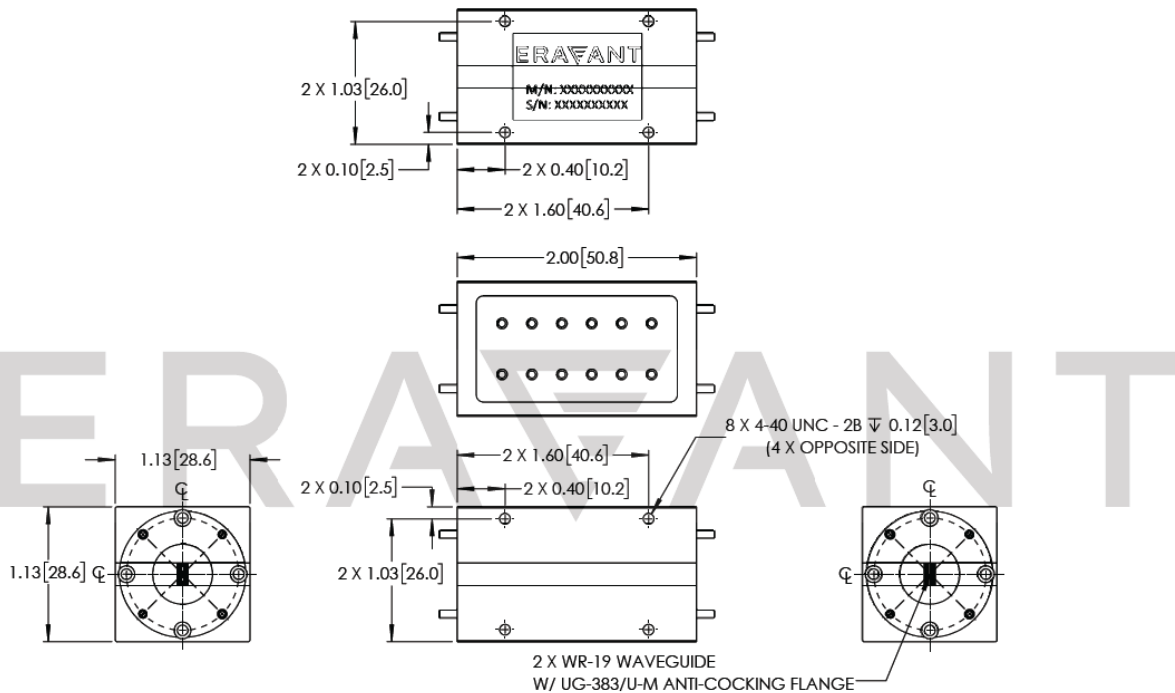

Note:

- All data presented were measured data. Actual data may vary.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.

