



Waveguide Bandpass Filter, W Band, 82.5 to 85.5 GHz

Description:

Model SWF-84303340-10-B1 is a W band waveguide bandpass filter with a passband frequency of 82.5 to 85.5 GHz and rejection frequencies from DC to 79 GHz and 93.5 to 110 GHz. The nominal insertion loss of the bandpass filter is 2.5 dB and the typical rejection is 40 dB. Since both low end and high end cut off frequencies can be selected by modifying the design, custom designs are available under different model numbers.



Features:

- Low Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communication Systems
- Radar Systems
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	82.5 GHz		85.5 GHz
Passband Insertion Loss		2.5 dB	
Passband Ripple		±0.4 dB	
Rejection Frequency, Low Side	DC		79 GHz
Rejection Frequency, High Side	93.5 GHz		110.0 GHz
Rejection	35 dB	40 dB	
Passband VSWR		1.5:1	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:


Item	Specification
Waveguide	WR-10 Waveguide with UG-387/U-M Flange
Size	1.20" (L) X 0.75" (Ø)
Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WF-BW






Waveguide Bandpass Filter, W Band, 82.5 to 85.5 GHz

Simulated Data

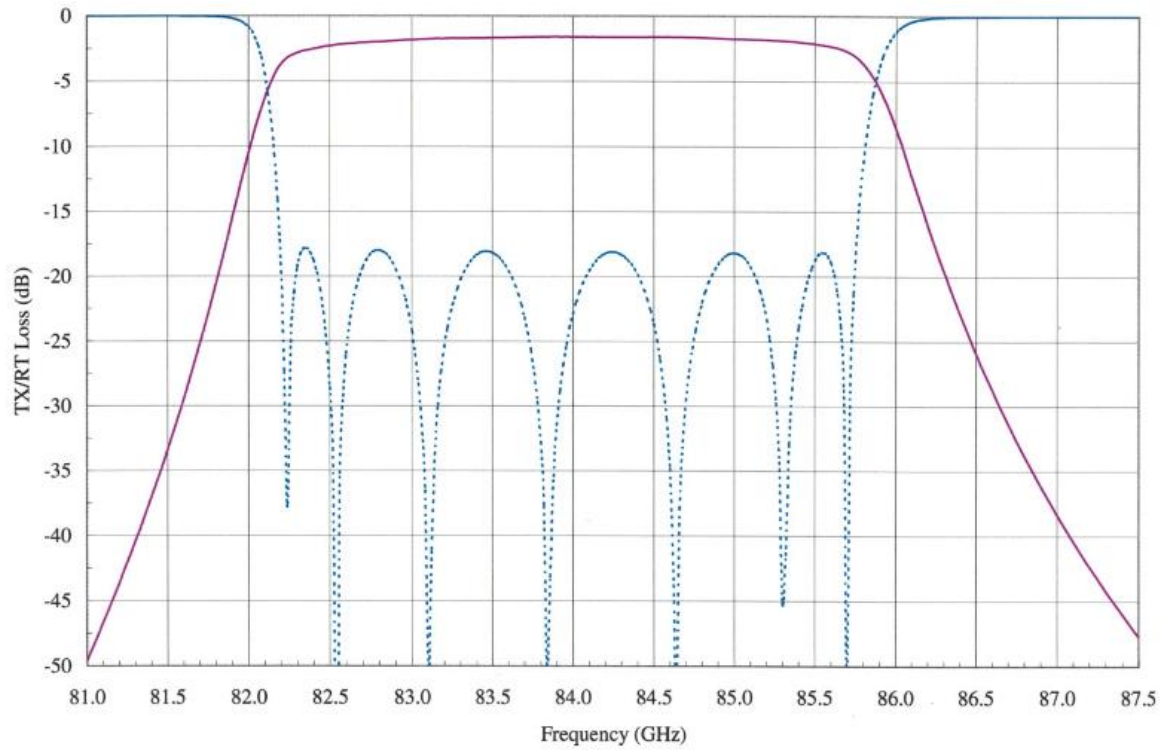

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

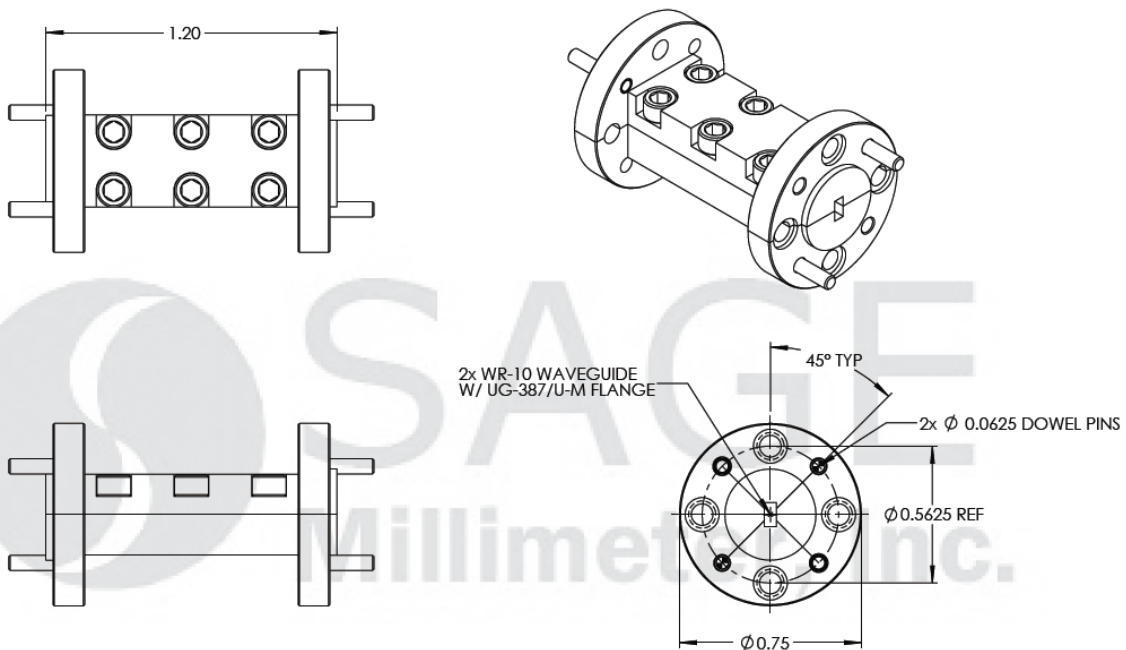

Waveguide Bandpass Filter, W Band, 82.5 to 85.5 GHz

Note:

- All data presented were simulated. Actual data may vary.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.

