



Waveguide Bandpass Filter, W Band, 92.5 to 95.5 GHz

Description:

Model SWF-94303320-10-B1 is a W band waveguide bandpass filter with a passband frequency of 92.5 to 95.5 GHz and rejection frequencies from DC to 91.5 GHz and 97 to 104 GHz. The nominal insertion loss of the bandpass filter is 2.5 dB and the typical rejection is 20 dB. Since both low end and high end cut off frequencies can be selected by modifying the design, custom designs are available under different model numbers.



Features:

- Low Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communication Systems
- Radar Systems
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	92.5 GHz		95.5 GHz
Passband Insertion Loss		2.5 dB	
Passband Ripple		±0.3 dB	
Rejection Frequency, Low Side	DC		91.5 GHz
Rejection Frequency, High Side	97 GHz		104 GHz
Rejection		20 dB	
Passband Return Loss		14 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Waveguide	WR-10 Waveguide with UG-387/U-M Flange
Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Size	1.20" (L) X 0.75" (Ø)
Outline	WF-BW






Waveguide Bandpass Filter, W Band, 92.5 to 95.5 GHz

Typical Performance vs. Frequency

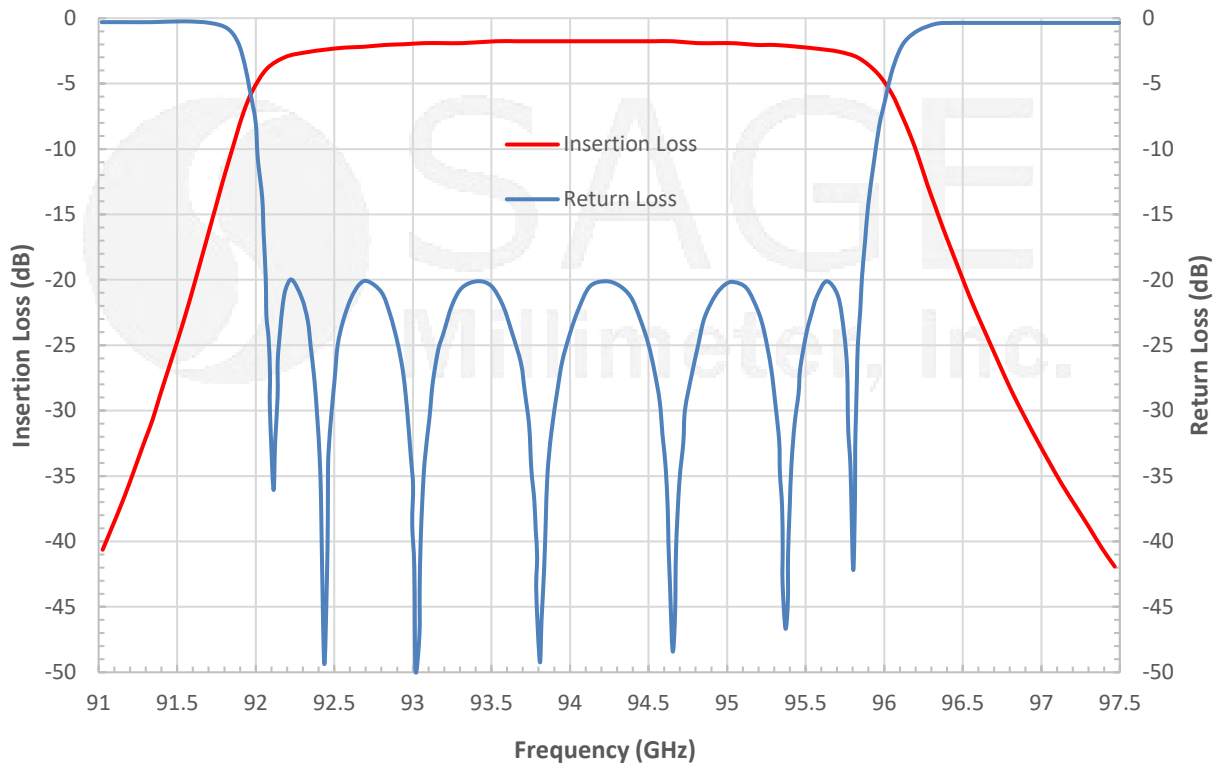

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

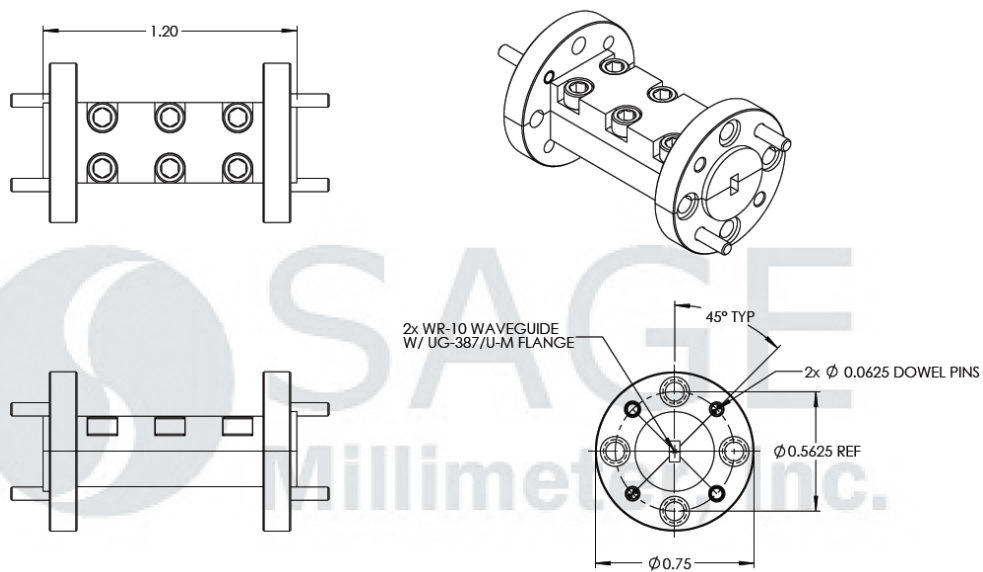

Waveguide Bandpass Filter, W Band, 92.5 to 95.5 GHz

Note:

- All data presented is simulated. Actual data may vary.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

