



E-Band Scalar Network Analyzer Extender

Description:

Model STN-SF612-03-D2 is an E-band scalar network analyzer extender that extends low frequency scalar network analyzers to 60 to 90 GHz. The extender offers a low cost means of producing E-band measurements while preserving the functionality and features of standard models. The extender is constructed with SAGE Millimeter’s high performance millimeterwave frequency extender (model STE-SF612-03-S1), direct reading attenuator (model STA-60-12-D1), directional coupler (model SWD-1040H-12-SB), and waveguide detectors (model STD-12SF-NI).



Features:

- Full Waveguide Band Operation
- Moderate Dynamic Range
- Cost Effective Solution

Applications:

- Test Lab
- Test Instrumentations

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Output Frequency	60 GHz		90 GHz
Input Frequency	10 GHz		15 GHz
Output Power		+3 dBm	
Input Power		+5 dBm	+20 dBm
Insertion Loss Dynamic Range		30 dB	
Return Loss Dynamic Range		20 dB	
Bias Input		+12V/450mA	
Specification Temperature		+25 °C	
Operating Temperature	+0 °C		+50 °C

Mechanical Specifications:

Item	Specification
RF Input	SMA (F)
RF Outputs	WR-12 Waveguide with UG-387/U Flange
DC Bias	2.5 mm DC Jack (AC-to-DC power converter included)
DC Bias Switch	On-Off Rocker Switch with Indicator Light
Detector Output	SMA (F)
Finish	Black Anodized and Gold Plated
Weight	6.8 lbs
Size	7.05" (W) x 20.63" (L) x 4.65" (H)
Outline	TN-DE2




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com




E-Band Scalar Network Analyzer Extender

Typical Output Powers vs. Frequency

P_{in} : +5 dBm, Bias: +12 V_{DC}/450 mA

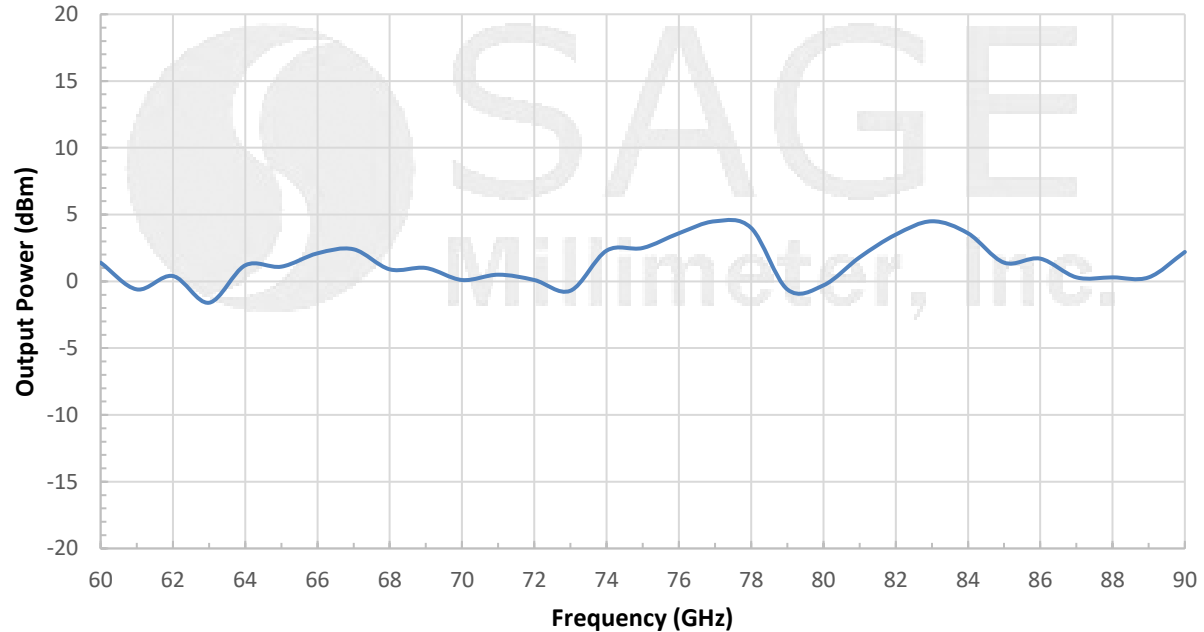

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

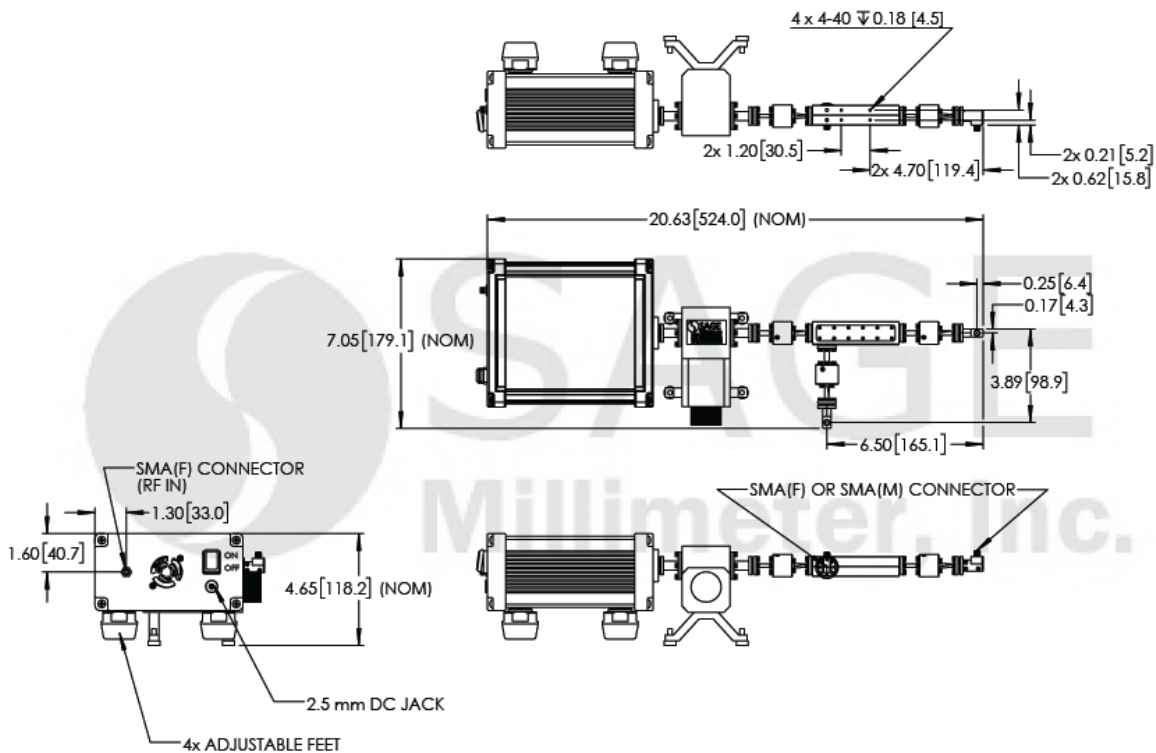

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



E-Band Scalar Network Analyzer Extender

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings of the device will damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will degrade performance and may damage the device.

