

WR-34 Waveguide Termination Load, 5 Watts

Description:

Model SWL-3437-S1 is a medium power, WR-34 waveguide termination load that covers the frequency range of 22 to 33 GHz. The termination load exhibits a typical return loss of 32 dB. It is designed and manufactured to offer a good match for system applications. Custom levels of power handling are available under different model numbers.



Features:

- Full Waveguide Band Coverage
- High Return Loss
- Instrumentation Grade

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	22 GHz		33 GHz
Return Loss		32 dB	
Power Handling		5 W (CW)	6 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


Mechanical Specifications:

Item	Specification
RF Port	WR-34 Waveguide with UG-1530/U Flange
Waveguide Material	Brass
Waveguide Finish	Gold Plated
Heat Sink Finish	Black Anodized
Weight	6.0 Oz
Outline	WL-3M



WR-34 Waveguide Termination Load, 5 Watts

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

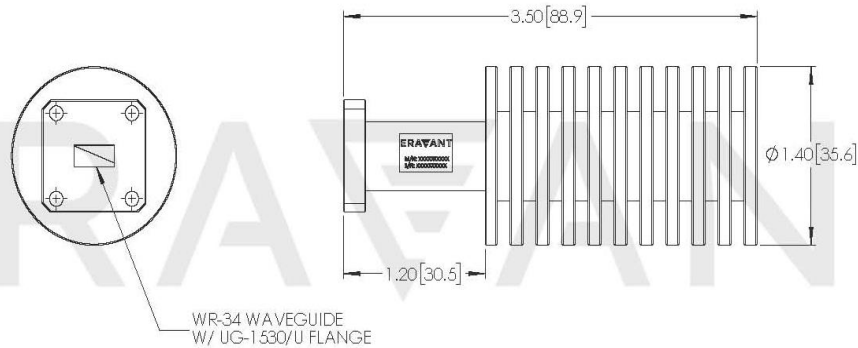

Note:

- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

ERAVANT

