

## SWT-034039-SB-C-QC

## 0.034" Square to Ø0.039" Circular Waveguide Mode Transition, Compact

**SWT-034039-SB-C-QC** is a compact 0.034" Square Waveguide to 0.039" Circular Waveguide mode transition. The mode transition is manufactured by either EDM machining or electro-forming techniques to ensure high accuracy and a quality surface finish.



## Mechanical Specifications:

Item	Specification
Waveguide Size	0.034" x 0.034" Square Waveguide with UG-387/U-M Anti-Cocking Flange
Waveguide Size	Ø0.039" Circular Waveguide with UG-387/U-M Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	0.8 Oz
Insertion Length	0.7"
Outline	WT-03SC-034-039-A-C

## ECCN

EAR99

## FEATURES

- Rugged Waveguide Configuration
- Low Insertion Loss
- Instrumentation Grade

## APPLICATIONS


- Test Lab
- Test Instrumentation
- Sub-assemblies

## SUPPLEMENTAL DETAILS



## SWT-034039-SB-C-QC

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

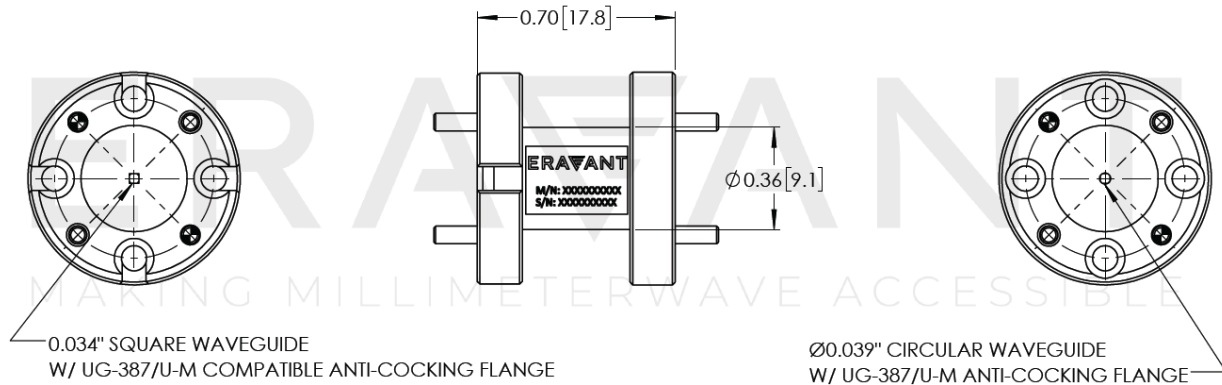

### NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

### CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1 mm connectors proper torque should be applied:  $4.0 \pm 0.15$  inch-pounds ( $0.45 \pm 0.02$  Nm). Torque wrench model SCH-06004-S1 is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied:  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm). Torque wrench model SCH-08008-S1 is highly recommended