

## SWT-12125-SB-WPC

## WR-12 to Circular Waveguide Mode Transition, Ø 0.125"

**SWT-12125-SB-WPC** is a WR-12 to 0.125" diameter circular waveguide mode transition. The mode transition is manufactured by either EDM machining or electro-forming techniques to ensure high accuracy and a quality surface finish. The transition only induces a fraction of a dB insertion loss and offers a return loss of 32 dB or better. The nominal operating frequency is 68 to 77 GHz. The dominate mode frequency range can be extended to cover 68 to 90 GHz if the higher order waveguide mode is not excited.



## Mechanical Specifications:

Item	Specification
Waveguide Size	WR-12 Waveguide with UG-387/U Flange
Waveguide Size	Ø 0.125" Circular Waveguide with UG-387/U-M Flange
Insertion Length	1.0"
Material	Brass
Finish	Gold Plated
Weight	0.8 Oz
Outline	WT-EC-125

## ECCN

EAR99

## FEATURES

- Rugged Waveguide Configuration
- Low Insertion Loss
- Instrumentation Grade

## APPLICATIONS


- Test Labs
- Instrumentation
- Sub-assemblies

## SUPPLEMENTAL DETAILS



SWT-12125-SB-WPC

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

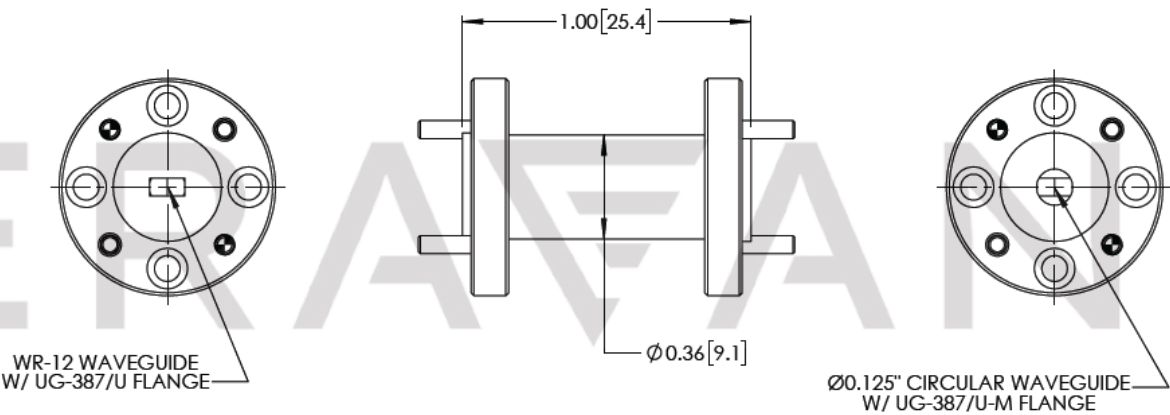

**NOTE:**

- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.