

0.148" Square to 0.141" Circular Waveguide Mode Transition, Compact

Description:

Model SWT-148141-SB-C-QC is a compact 0.148" Square Waveguide to 0.141" Circular Waveguide mode transition. The mode transition is manufactured by either EDM machining or electro-forming techniques to ensure high accuracy and a quality surface finish. The transition has nominal insertion loss and offers a return loss of 25 dB or better. The nominal operating frequency is 58 to 68 GHz.



Features:

- Rugged Waveguide Configuration
- Low Insertion Loss
- Instrumentation Grade


Applications:

- Test Labs
- Test Instrumentation
- Sub-assemblies

Mechanical Specifications:

Item	Specifications
Waveguide Size	0.148" Square Waveguide with UG-385/U-M Compatible Anti-Cocking Flange
Waveguide Size	0.141" Circular Waveguide with UG-385/U-M Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	0.75 Oz
Insertion Length	0.70"
Outline	WT-VSC-148-141-A-C

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

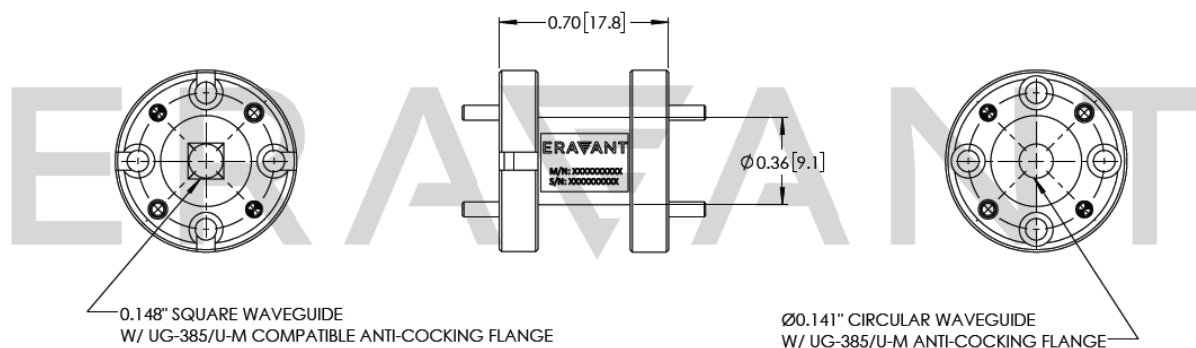

Note:

- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.