

WR-19 to Circular Waveguide Mode Transition, 0.188" Diameter

Description:

Model SWT-19188-SB is a WR-19 to 0.188" diameter circular waveguide mode transition. The mode transition is manufactured by either EDM machining or electro-forming techniques to ensure high accuracy and a quality surface finish. The transition only induces a fraction of a dB insertion loss and offers a return loss of 32 or better. The nominal operating frequency is 43 to 50 GHz. The dominate mode frequency range can be extended to cover 40 to 60 GHz if the higher order waveguide mode is not excited.



Features:

- Rugged Waveguide Configuration
- Low Insertion Loss
- Instrumentation Grade


Applications:

- Test Labs
- Test Instrumentation
- Sub-assemblies

Mechanical Specifications:

Item	Specifications
Waveguide Size	WR-19 Waveguide with UG-383/U-M Anti-Cocking Flange
Waveguide Size	0.188" Diameter Circular Waveguide with UG-383/U-M Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	2.8 Oz
Insertion Length	1.5"
Outline	WT-UC-188-A

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

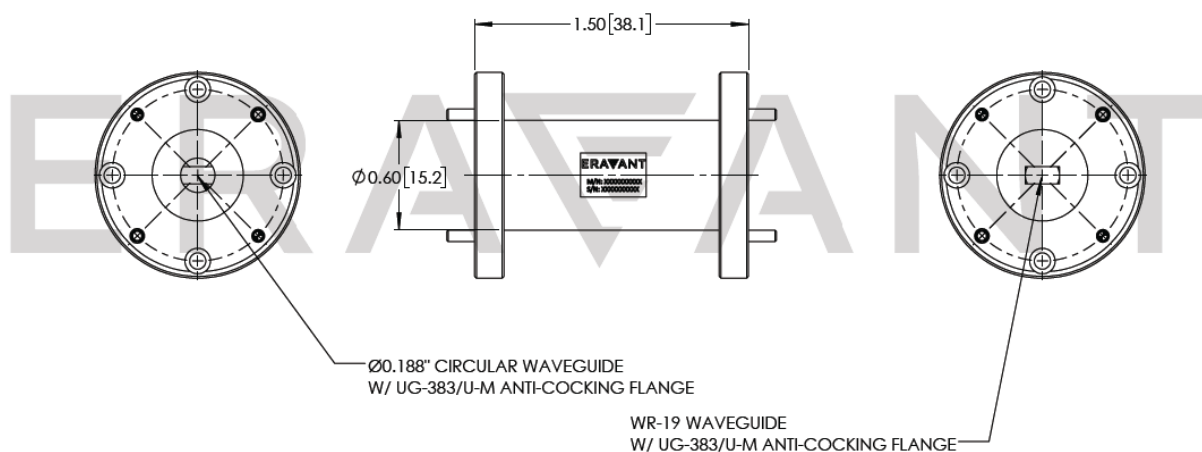

Note:

- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.



www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com