

3.5 mm (F) Coaxial Matching Load, 0.5 Watt, Metrology Grade

Description:

Model STQ-CM-3F27-U2 is a metrology grade 3.5 mm female coaxial matching load that covers the frequency range of DC to 26.5 GHz. The coaxial matching load exhibits a typical return loss of 30 dB. It is designed and manufactured to offer a good match for system and calibration applications. The characteristic impedance of the matching load is 50 Ohms and the power handling is 0.5 watt. The male version is available under the model number STQ-CM-3M27-U2.



Features:

- Metrology Grade
- High Return Loss
- 50 Ohms

Applications:

- Test Lab
- Cal Kit Replacement
- System Integration

Electrical Specifications:

Parameter		Minimum	Typical	Maximum
Frequency		DC		26.5 GHz
Return Loss	@ DC to 15 GHz		30 dB	
	@ 15 to 26.5 GHz		25 dB	
Impedance			50 Ω	
Power Handling				0.5 W (CW)
Specification Temperature			+25 °C	
Operating Temperature		-40 °C		+85 °C


Mechanical Specifications:

Item	Specification
Connector Type	3.5 mm Female
Material	Stainless Steel
Finish	Gold Plated
Weight	0.60 Oz
Length	1.0"
Outline	CM-3F-27-CE1




3.5 mm (F) Coaxial Matching Load, 0.5 Watt, Metrology Grade

Typical Return Loss vs. Frequency

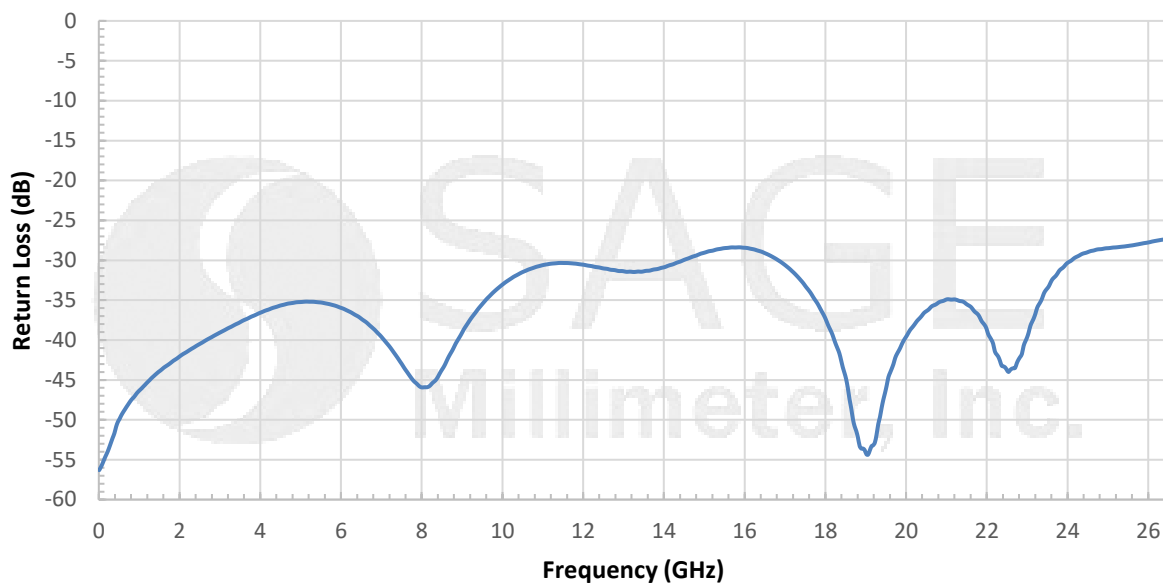

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

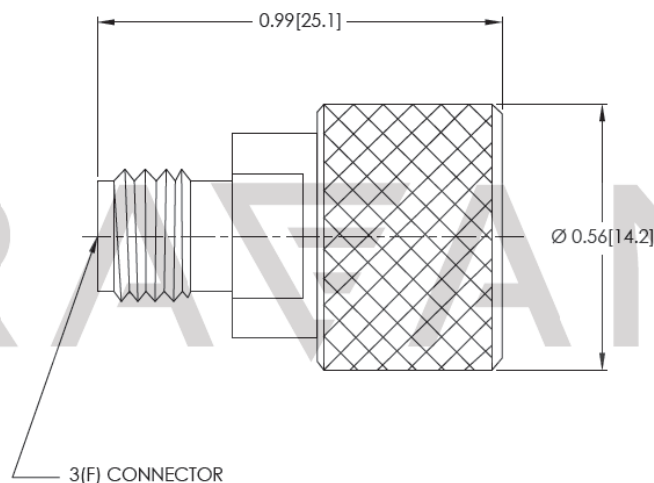

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com